

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

PROBLEMATIC	C TEST	RESULT	S			
Sample Status				ABNORMAL	NORMAL	
Silicon	ppm	ASTM D5185m	>75	<u> </u>	59	

Customer Id: PERDILSC Sample No.: PCA0108081 Lab Number: 06032537 Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data: Don Baldridge +1 <u>don.b505@comcast.net</u>

To change component or sample information: Customer Service +1 1-800-237-1369 <u>customerservice@wearcheck.com</u> There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS

16 Aug 2023 Diag: Don Baldridge

NORMAL



Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.All component wear rates are normal. There is no indication of any contamination in the oil. The condition of the oil is acceptable for the time in service.





OIL ANALYSIS REPORT

Sample Rating Trend

FLEET Volvo 2126935 Component

1 Differential Fluid GEAR OIL SAE 75W90 (--- GAL)

DIAGNOSIS

A Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

Elemental level of silicon (Si) above normal indicating ingress of dirt/seal material.

Fluid Condition


The condition of the oil is acceptable for the time in service.

			Aug2023	Dec2023		
SAMPLE INFOR	RMATION		limit/base		history1	history2
Sample Number		Client Info		PCA0108081	PCA0102048	
Sample Date		Client Info		03 Dec 2023	16 Aug 2023	
Machine Age	hrs	Client Info		0	0	
Oil Age	hrs	Client Info		0	0	
Oil Changed		Client Info		N/A	N/A	
Sample Status				ABNORMAL	NORMAL	
CONTAMINA	TION	method	limit/base	current	history1	history2
Water		WC Method	>.2	NEG	NEG	
WEAR META	LS	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>500	360	177	
Chromium	ppm	ASTM D5185m	>10	4	3	
Nickel	ppm	ASTM D5185m	>10	4	5	
Titanium	ppm	ASTM D5185m		<1	<1	
Silver	ppm	ASTM D5185m		0	0	
Aluminum	ppm	ASTM D5185m	>25	2	2	
Lead	ppm	ASTM D5185m	>25	6	0	
Copper	ppm	ASTM D5185m	>100	62	0	
Tin	ppm	ASTM D5185m	>10	4	<1	
Vanadium	ppm	ASTM D5185m		0	0	
Cadmium	ppm	ASTM D5185m		0	0	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	400	112	146	
Barium	ppm	ASTM D5185m	200	6	2	
Molybdenum	ppm	ASTM D5185m	12	0	0	
Manganese	ppm	ASTM D5185m		14	13	
Magnesium	ppm	ASTM D5185m	12	1	2	
Calcium	ppm	ASTM D5185m	150	15	24	
Phosphorus	ppm	ASTM D5185m	1650	1125	1042	
Zinc	ppm	ASTM D5185m	125	19	25	
Sulfur	ppm	ASTM D5185m	22500	25037	27116	
CONTAMINA	NTS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>75	117	59	
Sodium	ppm	ASTM D5185m		9	6	
Potassium	ppm	ASTM D5185m	>20	2	2	
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	
Precipitate	scalar	*Visual	NONE	NONE	NONE	
Silt	scalar	*Visual	NONE	NONE	NONE	
Debris	scalar	*Visual	NONE	LIGHT	NONE	
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	
Appearance	scalar	*Visual	NORML	NORML	NORML	
Odor	scalar	*Visual	NORML	NORML	NORML	
Emulsified Water	scalar	*Visual	>.2	NEG	NEG	
Free Water	scalar	*Visual		NEG	NEG	
:09:12) Rev: 1					Submitted By:	KEVIN HOOK

DIRT



OIL ANALYSIS REPORT

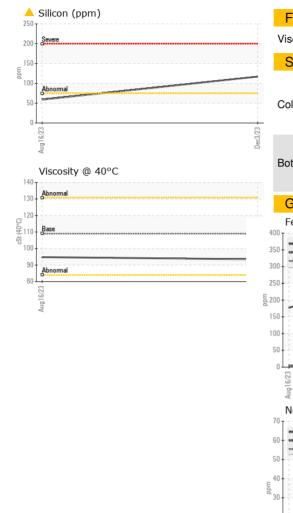

109 93.5 limit/base current no image no image	no image	history2
no image	no image	
		no image
		no image
no image		
no image		
	no image	no image
Dec3		
ec3/23 -		

Ē