

### **OIL ANALYSIS REPORT**

#### Sample Rating Trend

FUEL

# Machine Id 727090-361682

Component Diesel Engine

Fluid

PETRO CANADA DURON SHP 15W40 (--- GAL)

#### DIAGNOSIS

#### Recommendation

We advise that you check the fuel injection system. We recommend an early resample to monitor this condition.

#### Wear

All component wear rates are normal.


Contamination

Light fuel dilution occurring.

#### **Fluid Condition**

The BN result indicates that there is suitable alkalinity remaining in the oil.

GAL)			019 Oct2019 Feb202			
SAMPLE INFOR	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		GFL0100467	GFL0093295	GFL0093270
Sample Date		Client Info		30 Nov 2023	12 Oct 2023	22 Sep 2023
Machine Age	mls	Client Info		171834	168535	166885
Oil Age	mls	Client Info		171834	168535	166885
Oil Changed		Client Info		Not Changd	Not Changd	Changed
Sample Status				MARGINAL	ABNORMAL	SEVERE
CONTAMINAT	ION	method	limit/base	current	history1	history2
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
WEAR METAL	c	method	limit/base	current	biotopul	history?
					history1	history2
Iron	ppm	ASTM D5185m	>100	14	13	42
Chromium	ppm	ASTM D5185m	>20	<1	<1	2
Nickel	ppm	ASTM D5185m	>4	<1	<1	<1
Titanium	ppm	ASTM D5185m	-	<1	0	0
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>20 >40	1	2	3
Lead	ppm	ASTM D5185m ASTM D5185m	>40 >330	<1 <1	0	<1
Copper Tin	ppm	ASTM D5185m	>330	<1	<1	<1
Vanadium	ppm ppm	ASTM D5185m	>15	<1	<1	< 1
Cadmium	ppm	ASTM D5185m		۰ <1	0	0
ADDITIVES	1- 1-	method	limit/base	current	history1	history2
Boron	nnm	ASTM D5185m	0	26	3	0
Barium	ppm ppm	ASTM D5185m	0	11	0	0
Molybdenum	ppm	ASTM D5185m	60	46	59	58
Manganese	ppm	ASTM D5185m	0	<1	0	<1
Magnesium	ppm	ASTM D5185m	1010	705	882	822
Calcium	ppm	ASTM D5185m	1070	792	1018	975
Phosphorus	ppm	ASTM D5185m	1150	1055	978	901
Zinc	ppm	ASTM D5185m	1270	932	1179	1129
Sulfur	ppm	ASTM D5185m	2060	4116	3169	3101
CONTAMINAN	TS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	6	6	9
Sodium	ppm	ASTM D5185m		14	14	13
Potassium	ppm	ASTM D5185m	>20	2	2	2
Fuel	%	ASTM D3524	>5	<u> </u>	6.6	• 10.1
INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.6	0.5	1.5
Nitration	Abs/cm	*ASTM D7624	>20	8.3	8.8	14.8
Sulfation	Abs/.1mm	*ASTM D7415	>30	42.1	19.4	26.2
FLUID DEGRA		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	47.6	16.2	26.3
Base Number (BN)	mg KOH/g			8.1	8.1	6.3
	0					







6

4.

Dec19/18

## **OIL ANALYSIS REPORT**

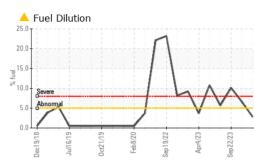

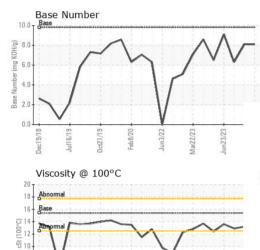

Dct21/19

ah 8/20

un23/23

Mar22/23


80


70

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPE	RTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	14.5	13.2	12.9
GRAPHS						

Ferrous Alloys

lead



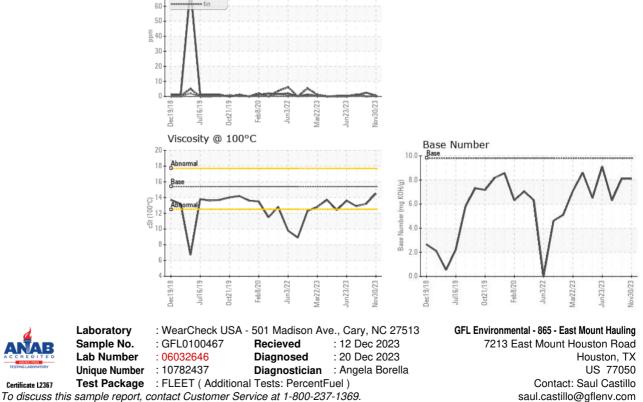

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Submitted By: TECHNICIAN ACCOUNT

Т:

F: