


# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Area  
**KEMP QUARRIES / BCS - MILL CREEK [64677]**  
Machine Id  
**OHT103**  
Component  
**Rear Differential**  
Fluid  
**PETRO CANADA PRODURO TO-4 SAE 50 (--- GAL)**

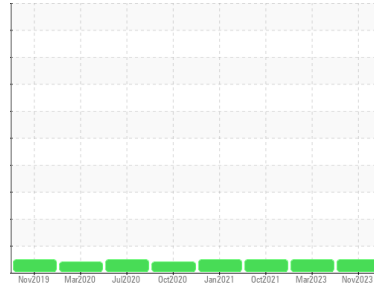

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. ( Customer Sample Comment: PM-1 sampled fluid )

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0070635</b>	PCA0086023	PCA0048612
Sample Date	Client Info		<b>29 Nov 2023</b>	15 Mar 2023	25 Oct 2021
Machine Age	hrs	Client Info	<b>2855</b>	2517	2050
Oil Age	hrs	Client Info	<b>2855</b>	2517	2050
Oil Changed	Client Info		<b>Not Chngd</b>	Changed	Not Chngd
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>.2	<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >500	<b>6</b>	32	22
Chromium	ppm	ASTM D5185m >3	<b>0</b>	<1	<1
Nickel	ppm	ASTM D5185m >3	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m >2	<b>0</b>	<1	<1
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185m >30	<b>1</b>	3	2
Lead	ppm	ASTM D5185m >13	<b>&lt;1</b>	<1	<1
Copper	ppm	ASTM D5185m >103	<b>&lt;1</b>	3	3
Tin	ppm	ASTM D5185m >5	<b>0</b>	<1	0
Antimony	ppm	ASTM D5185m >5	<b>---</b>	---	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 2	<b>1</b>	7	0
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 0	<b>&lt;1</b>	3	3
Manganese	ppm	ASTM D5185m 0	<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185m 9	<b>21</b>	40	41
Calcium	ppm	ASTM D5185m 3114	<b>3470</b>	3223	3146
Phosphorus	ppm	ASTM D5185m 1099	<b>937</b>	1150	1056
Zinc	ppm	ASTM D5185m 1245	<b>1104</b>	1347	1278
Sulfur	ppm	ASTM D5185m 7086	<b>4341</b>	7150	5784


## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >100	<b>20</b>	27	22
Sodium	ppm	ASTM D5185m	<b>0</b>	<1	<1
Potassium	ppm	ASTM D5185m >20	<b>0</b>	2	0

## VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	<b>NONE</b>	MODER	NONE
Yellow Metal	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual >.2	<b>NEG</b>	NEG	NEG
Free Water	scalar	*Visual	<b>NEG</b>	NEG	NEG









# OIL ANALYSIS REPORT

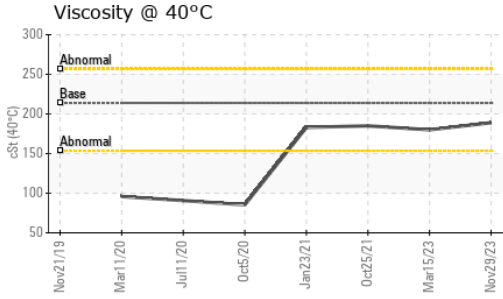

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	213.9	189	180

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image

## GRAPHS

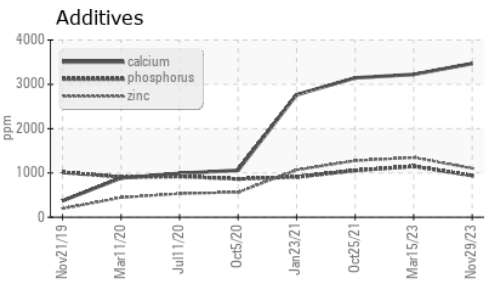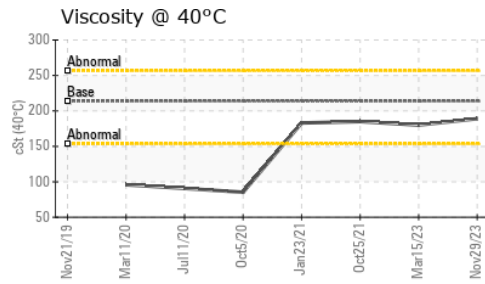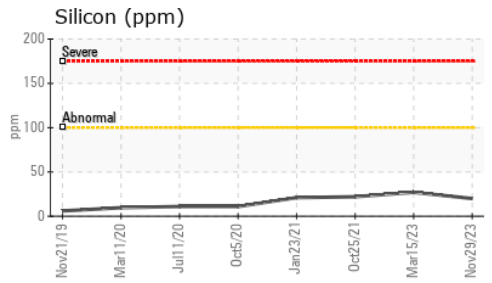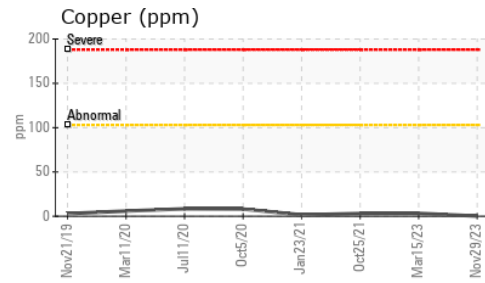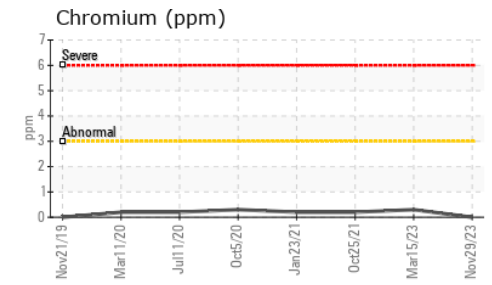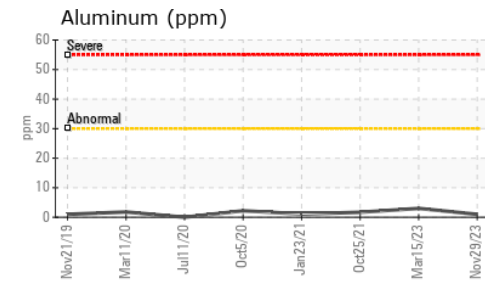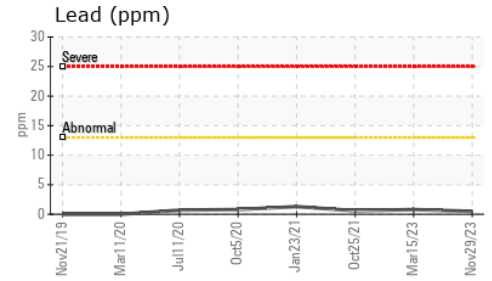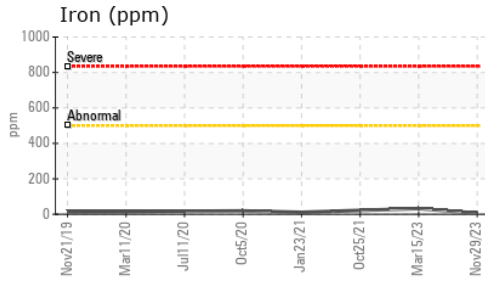

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0070635 **Received** : 12 Dec 2023  
**Lab Number** : 06032951 **Diagnosed** : 15 Dec 2023  
**Unique Number** : 10782742 **Diagnostician** : Sean Felton  
**Test Package** : MOB 1

**Kemp Quarries - BCS-Mill Creek**  
 609 Lazy E Rd  
 Noel, MO  
 US 64854  
 Contact: TRAVIS ELLIS  
 tellis@kempquarries.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: