


# OIL ANALYSIS REPORT

Sample Rating Trend

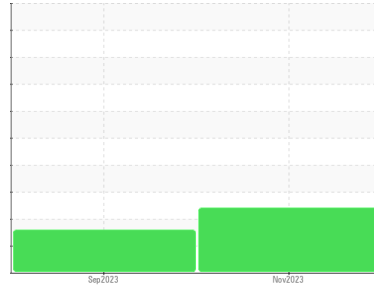

Machine Id  
**2227118**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 10W30 (--- QTS)**

## DIAGNOSIS

### Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

### Wear

The copper level is abnormal. In the absence of other significant wear metals, suspect copper due to sources other than wear (i.e. cooling core). All other metal levels are typical for a new component breaking in.

### Contamination

Elemental level of silicon (Si) above normal indicating ingress of seal material. Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0102460</b>	PCA0101160	---
Sample Date	Client Info		<b>28 Nov 2023</b>	08 Sep 2023	---
Machine Age	mls	Client Info	<b>41206</b>	19706	---
Oil Age	mls	Client Info	<b>40000</b>	0	---
Oil Changed	Client Info		<b>Changed</b>	N/A	---
Sample Status			<b>ABNORMAL</b>	ABNORMAL	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	0.5	---
Water	WC Method	>0.2	<b>NEG</b>	NEG	---
Glycol	WC Method		<b>NEG</b>	NEG	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	<b>62</b>	43
Chromium	ppm	ASTM D5185m	>20	<b>2</b>	<1
Nickel	ppm	ASTM D5185m	>4	<b>7</b>	2
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1
Silver	ppm	ASTM D5185m	>3	<b>11</b>	16
Aluminum	ppm	ASTM D5185m	>20	<b>25</b>	25
Lead	ppm	ASTM D5185m	>40	<b>&lt;1</b>	<1
Copper	ppm	ASTM D5185m	>330	<b>▲ 441</b>	188
Tin	ppm	ASTM D5185m	>15	<b>6</b>	5
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1
Cadmium	ppm	ASTM D5185m		<b>&lt;1</b>	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	<b>56</b>	205
Barium	ppm	ASTM D5185m	0	<b>11</b>	0
Molybdenum	ppm	ASTM D5185m	50	<b>110</b>	117
Manganese	ppm	ASTM D5185m	0	<b>4</b>	4
Magnesium	ppm	ASTM D5185m	950	<b>689</b>	741
Calcium	ppm	ASTM D5185m	1050	<b>1379</b>	1540
Phosphorus	ppm	ASTM D5185m	995	<b>648</b>	689
Zinc	ppm	ASTM D5185m	1180	<b>837</b>	864
Sulfur	ppm	ASTM D5185m	2600	<b>2275</b>	2878

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>▲ 49</b>	▲ 55
Sodium	ppm	ASTM D5185m		<b>2</b>	3
Potassium	ppm	ASTM D5185m	>20	<b>73</b>	61






## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>0.4</b>	0.2
Nitration	Abs/cm	*ASTM D7624	>20	<b>11.5</b>	9.2
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>24.1</b>	23.7

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>24.0</b>	21.5
Base Number (BN)	mg KOH/g	ASTM D2896		<b>6.1</b>	7.9





# OIL ANALYSIS REPORT

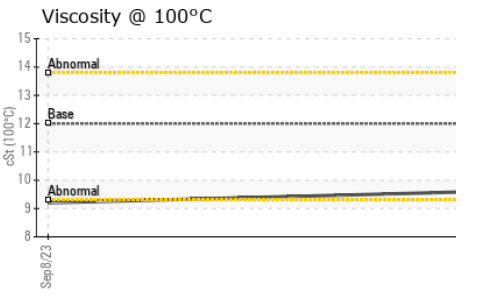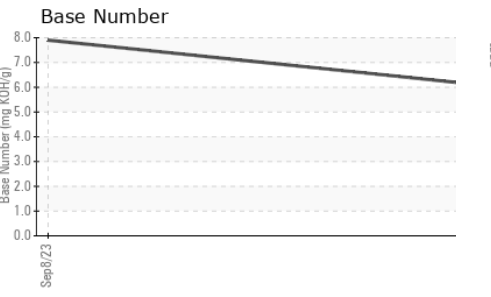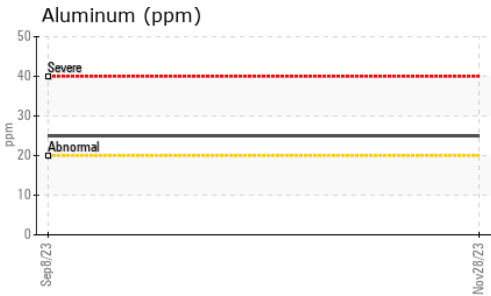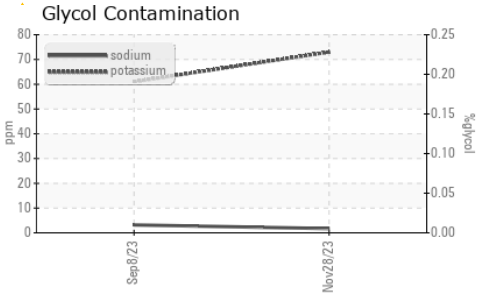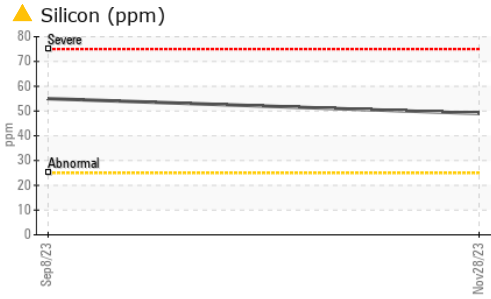

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	12.00	<b>9.6</b>	9.2	---

## GRAPHS

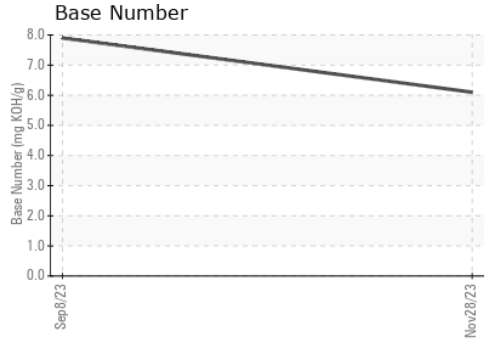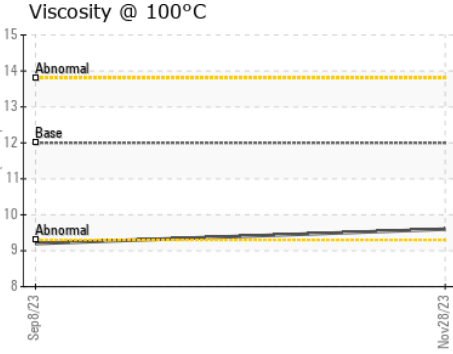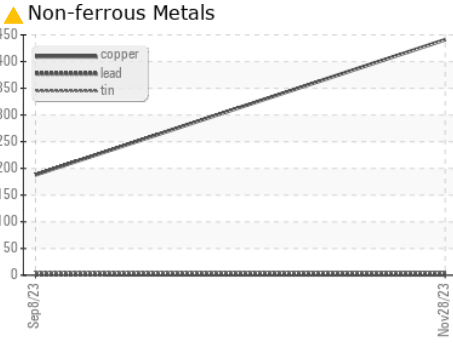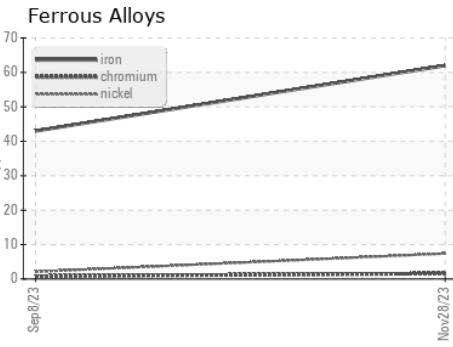

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0102460 **Recieved** : 13 Dec 2023  
**Lab Number** : **06033106** **Diagnosed** : 15 Dec 2023  
**Unique Number** : 10782897 **Diagnostician** : Don Baldrige  
**Test Package** : FLEET

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**PERDUE FARMS - SALISBURY**  
 7036 ZION CHURCH ROAD  
 SALISBURY, MD  
 US 21802  
 Contact: RICHARD O'NEAL  
 richard.oneal@perdue.com  
 T: (410)543-3628  
 F: (410)341-2164