




OIL ANALYSIS REPORT

Sample Rating Trend

GLYCOL



Machine Id
4517M
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

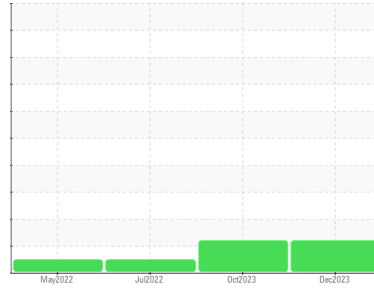

DIAGNOSIS

Recommendation

We advise that you check for the source of the coolant leak. Check for low coolant level. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

Contamination

Sodium and/or potassium levels are high. Fuel content negligible.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0104228	GFL0084953	GFL0052073
Sample Date	Client Info	08 Dec 2023	17 Oct 2023	14 Jul 2022
Machine Age	hrs	23029	150320	134603
Oil Age	hrs	1102	150320	134603
Oil Changed	Client Info	N/A	Changed	N/A
Sample Status		ABNORMAL	ABNORMAL	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >90	36	5	22
Chromium	ppm	ASTM D5185m >20	1	<1	2
Nickel	ppm	ASTM D5185m >2	0	0	<1
Titanium	ppm	ASTM D5185m >2	0	0	<1
Silver	ppm	ASTM D5185m >2	0	<1	<1
Aluminum	ppm	ASTM D5185m >20	2	3	2
Lead	ppm	ASTM D5185m >40	<1	0	<1
Copper	ppm	ASTM D5185m >330	<1	<1	1
Tin	ppm	ASTM D5185m >15	0	0	1
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	<1	0

ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m 0	8	0	3
Barium	ppm	ASTM D5185m 0	0	0	0
Molybdenum	ppm	ASTM D5185m 60	66	45	53
Manganese	ppm	ASTM D5185m 0	<1	<1	<1
Magnesium	ppm	ASTM D5185m 1010	1066	755	824
Calcium	ppm	ASTM D5185m 1070	1210	820	1008
Phosphorus	ppm	ASTM D5185m 1150	1175	885	879
Zinc	ppm	ASTM D5185m 1270	1385	1076	1095
Sulfur	ppm	ASTM D5185m 2060	3182	2625	3127

CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >25	6	5	3
Sodium	ppm	ASTM D5185m	▲ 121	6	6
Potassium	ppm	ASTM D5185m >20	2	2	<1
Fuel	%	ASTM D3524 >3.0	0.0	▲ 4.1	<1.0
Glycol	%	*ASTM D2982	NEG	NEG	NEG

INFRA-RED





method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844 >6	1.4	0.2	0.5
Nitration	Abs/cm	*ASTM D7624 >20	11.0	4.7	9.0
Sulfation	Abs/.1mm	*ASTM D7415 >30	23.3	18.2	21.0

FLUID DEGRADATION

method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414 >25	18.1	13.1	17.2
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	7.6	7.5	7.2







OIL ANALYSIS REPORT

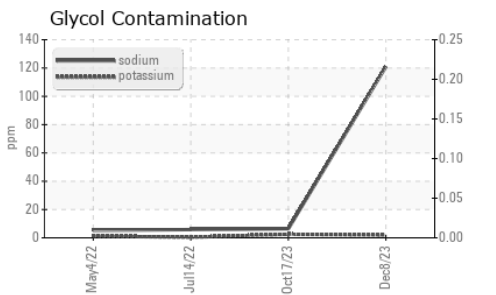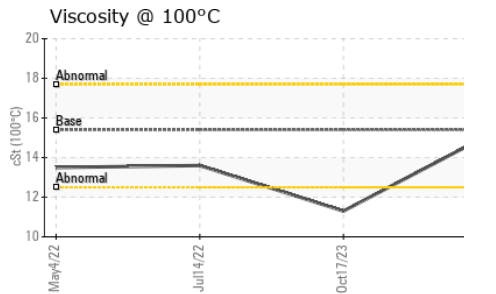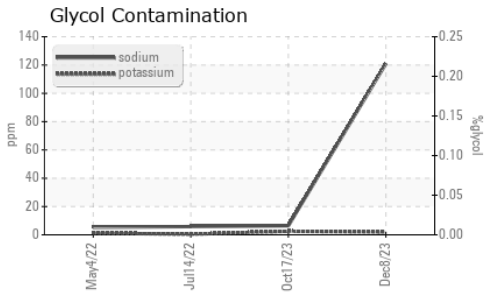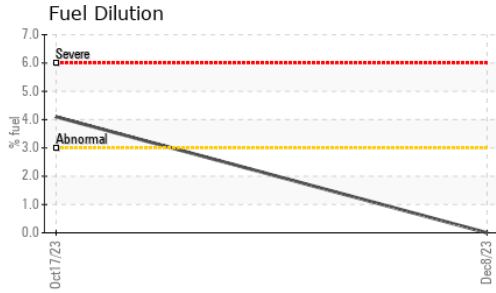

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	15.1	▲ 11.3 13.6

GRAPHS

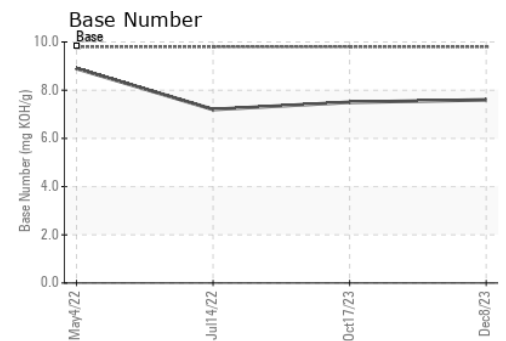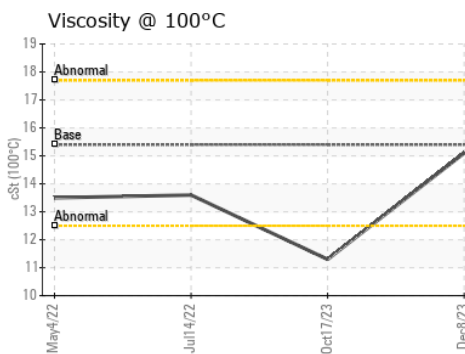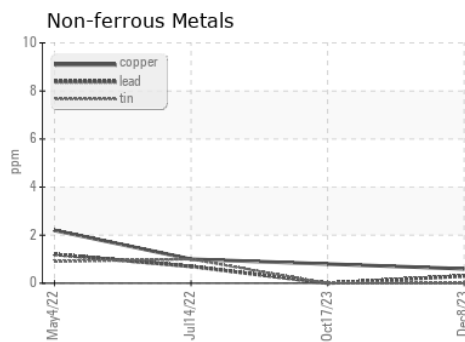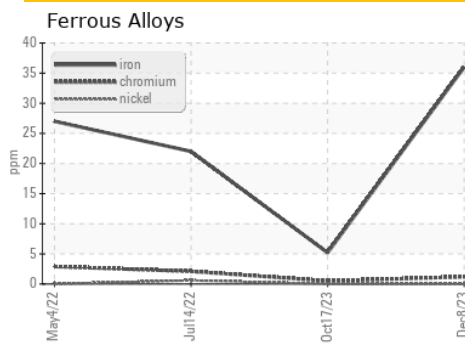

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : GFL0104228 Recieved : 13 Dec 2023
 Lab Number : 06033125 Diagnosed : 21 Dec 2023
 Unique Number : 10782916 Diagnostician : Jonathan Hester
 Test Package : FLEET (Additional Tests: Glycol, PercentFuel)

GFL Environmental - 410 - Michigan West
 39000 Van Born Rd
 Wayne, MI
 US 48184
 Contact: Belal Dgheish
 bdgheish@gflenv.com
 T: (734)714-2340
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)