

OIL ANALYSIS REPORT

Sample Rating Trend

FUEL


Area
Off-Road
Machine Id
SL63
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS
Recommendation

We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			PCA0090484	PCA0078014	---
Sample Date	Client Info			11 Dec 2023	13 Sep 2022	---
Machine Age	hrs	Client Info		1483	0	---
Oil Age	hrs	Client Info		1483	0	---
Oil Changed	Client Info			N/A	N/A	---
Sample Status				ABNORMAL	ABNORMAL	---

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method	>0.2		NEG	NEG	---
Glycol	WC Method			NEG	NEG	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	9	13	---
Chromium	ppm	ASTM D5185m	>20	<1	1	---
Nickel	ppm	ASTM D5185m	>2	0	<1	---
Titanium	ppm	ASTM D5185m	>2	0	<1	---
Silver	ppm	ASTM D5185m	>2	0	<1	---
Aluminum	ppm	ASTM D5185m	>25	1	4	---
Lead	ppm	ASTM D5185m	>40	0	<1	---
Copper	ppm	ASTM D5185m	>330	19	30	---
Tin	ppm	ASTM D5185m	>15	0	1	---
Vanadium	ppm	ASTM D5185m		0	0	---
Cadmium	ppm	ASTM D5185m		0	0	---




ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	10	39	---
Barium	ppm	ASTM D5185m	0	0	3	---
Molybdenum	ppm	ASTM D5185m	60	61	37	---
Manganese	ppm	ASTM D5185m	0	<1	3	---
Magnesium	ppm	ASTM D5185m	1010	960	462	---
Calcium	ppm	ASTM D5185m	1070	1057	1664	---
Phosphorus	ppm	ASTM D5185m	1150	1021	796	---
Zinc	ppm	ASTM D5185m	1270	1265	976	---
Sulfur	ppm	ASTM D5185m	2060	2929	2984	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	6	15	---
Sodium	ppm	ASTM D5185m		4	5	---
Potassium	ppm	ASTM D5185m	>20	0	0	---
Fuel	%	ASTM D3524	>5	▲ 5.8	▲ 5.3	---

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.2	0.1	---
Nitration	Abs/cm	*ASTM D7624	>20	8.9	9.3	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	21.1	23.0	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	18.6	20.9	---
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	8.39	8.85	---









OIL ANALYSIS REPORT

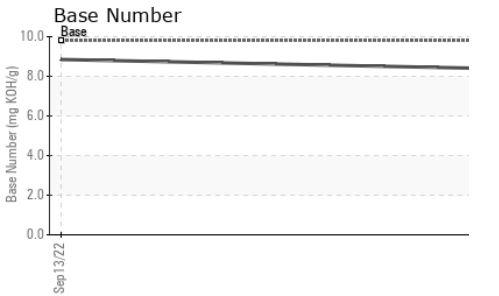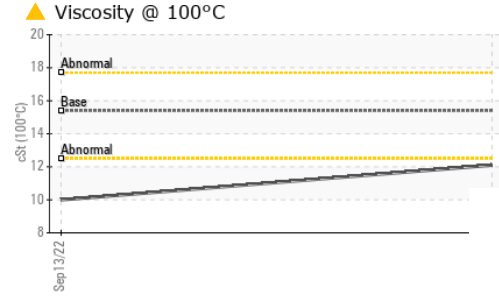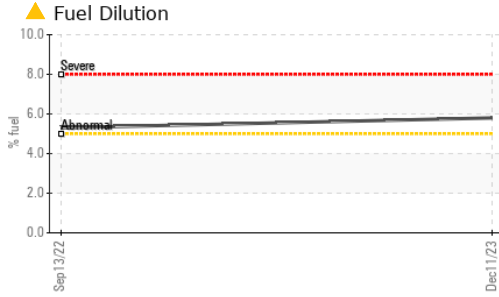

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	▲ 12.1	▲ 10.0	---

GRAPHS

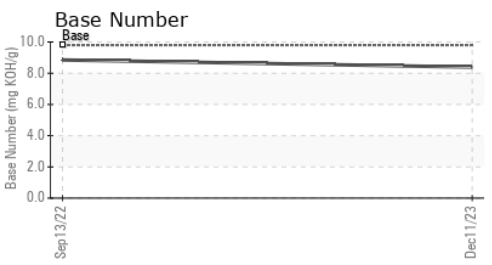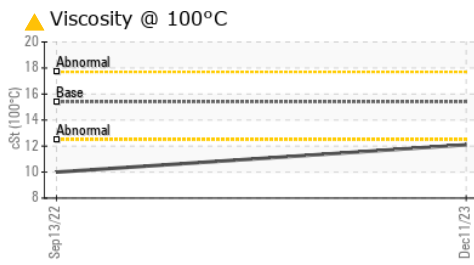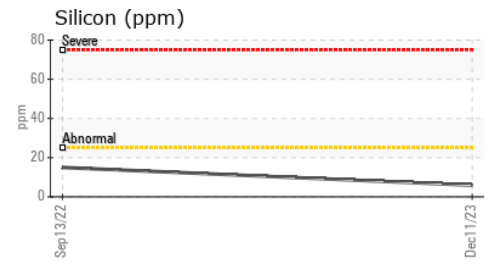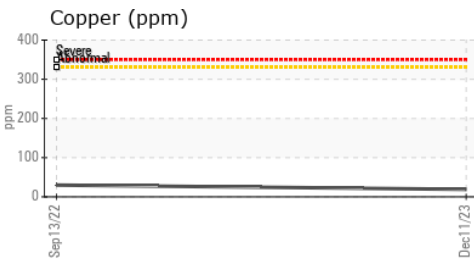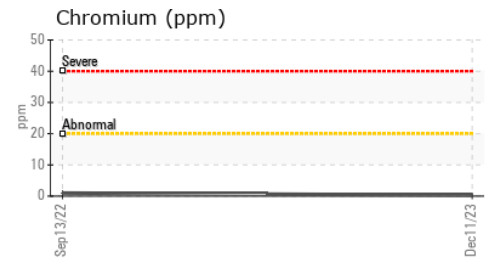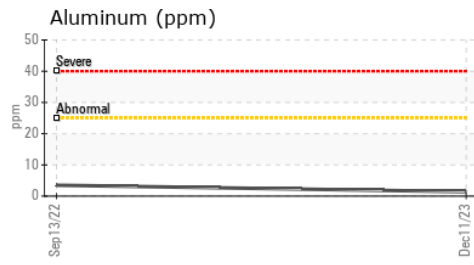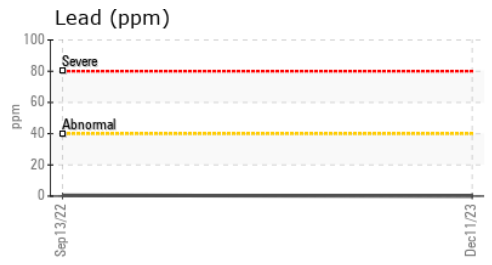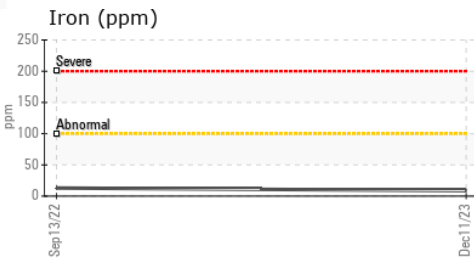

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0090484 **Recieved** : 13 Dec 2023
Lab Number : 06033640 **Diagnosed** : 18 Dec 2023
Unique Number : 10783431 **Diagnostician** : Wes Davis
Test Package : MOB 2 (Additional Tests: PercentFuel)

WIN Waste Innovations - Shop # - Taunton
 565 WINTHROP ST
 TAUNTON, MA
 US 02780
 Contact: Dave Wilson
 dwilson@win-waste.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)