

Sample Rating Trend


COMPONENT CONDITION SUMMARY

Machine Id 2126923

NOT GIVEN (--- QTS)

Component Transmission

Fluic

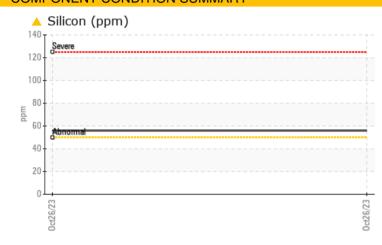

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS						
Sample Status				ABNORMAL		
Silicon	ppm	ASTM D5185m	>50	<u> </u>		

Customer Id: PERPRIPCA Sample No.: PCA0113315 Lab Number: 06033910 Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data: Jonathan Hester +1 919-379-4092 x4092 <u>jhester@wearcheckusa.com</u>

To change component or sample information: Customer Service +1 1-800-237-1369 <u>customerservice@wearcheck.com</u> There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS



OIL ANALYSIS REPORT

Sample Rating Trend



Machine Id 2126923 Component Transmission Fluid NOT GIVEN (--- QTS)

DIAGNOSIS

A Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

Elemental level of silicon (Si) above normal indicating ingress of seal material.


Fluid Condition

The condition of the fluid is acceptable for the time in service.

SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PCA0113315		
Sample Date		Client Info		26 Oct 2023		
Machine Age	mls	Client Info		0		
Oil Age	mls	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				ABNORMAL		
CONTAMINATIO	NC	method	limit/base	current	history1	history2
Water		WC Method	>0.1	NEG		
WEAR METALS	6	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>200	63		
Chromium	ppm	ASTM D5185m	>10	<1		
Nickel	ppm	ASTM D5185m		<1		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>50	1		
Lead	ppm	ASTM D5185m	>50	0		
Copper	ppm	ASTM D5185m	>200	88		
Tin	ppm	ASTM D5185m	>10	0		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0		
Barium	ppm	ASTM D5185m		0		
Molybdenum	ppm	ASTM D5185m		1		
Manganese	ppm	ASTM D5185m		24		
Magnesium	ppm	ASTM D5185m		2		
Calcium	ppm	ASTM D5185m		940		
Phosphorus	ppm	ASTM D5185m		709		
Zinc	ppm	ASTM D5185m		9		
Sulfur	ppm	ASTM D5185m		5334		
CONTAMINANT	ſS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	6		
Sodium	ppm	ASTM D5185m		0		
Potassium	ppm	ASTM D5185m	>20	1		
VISUAL		method	limit/hooo	current	biotorud	history2
		method	limit/base	current	history1	motory
White Metal	scalar	*Visual	NONE	NONE		
	scalar scalar					
Yellow Metal		*Visual	NONE	NONE		
Yellow Metal	scalar	*Visual *Visual	NONE NONE	NONE NONE		
Yellow Metal Precipitate	scalar scalar	*Visual *Visual *Visual	NONE NONE NONE	NONE NONE NONE		
Yellow Metal Precipitate Silt	scalar scalar scalar	*Visual *Visual *Visual *Visual	NONE NONE NONE NONE	NONE NONE NONE NONE		
Yellow Metal Precipitate Silt Debris	scalar scalar scalar scalar	*Visual *Visual *Visual *Visual *Visual	NONE NONE NONE NONE	NONE NONE NONE LIGHT	 	
Yellow Metal Precipitate Silt Debris Sand/Dirt Appearance Odor	scalar scalar scalar scalar scalar	*Visual *Visual *Visual *Visual *Visual *Visual	NONE NONE NONE NONE NONE	NONE NONE NONE LIGHT NONE	 	
Yellow Metal Precipitate Silt Debris Sand/Dirt Appearance	scalar scalar scalar scalar scalar scalar	*Visual *Visual *Visual *Visual *Visual *Visual *Visual	NONE NONE NONE NONE NONE NORE	NONE NONE NONE LIGHT NONE NORML	 	



OIL ANALYSIS REPORT



	FLUID PROF	PERTIES	method	limit/base	current	history1	history2
	Visc @ 40°C	cSt	ASTM D445		90.9		
	SAMPLE IMA	AGES	method	limit/base	current	history1	history2
	Color				no image	no image	no image
6/23							
0ct26/23	Bottom				no image	no image	no image
	GRAPHS Ferrous Alloys						
	70 iron						
	60 - chromium 50 - nickel						
	30						
	20						
	10-						
	0			6/23			
	0ct26/23			0ct26/23			
	Non-ferrous Me	tals					
	80 copper 10 copper lead						
	70						
	50 - 						
-	30 -						
	20-						
	10						
	0ct26/23			0ct26/23			
	□ Viscosity @ 40°	С		0			
	104 102 Abnormal						
	98						
0	96 -						
cSt (40°C)	94						
	90						
	86 84 - Abnormal						
	82						
	0ct26/23			0ct26/23			
atom.	WeerCheek UCA	E01 Madi					
ratory le No.	: WearCheck USA : PCA0113315	Recieve	d : 13 D	ec 2023			ARDWARE D
lumber e Number	: <mark>06033910</mark> : 10789139	Diagnos Diagnos		ec 2023 athan Heste	r	PRINCE	EGEORGE, V US 2387
Package	: FLEET	. 3				Contact: M	ICHAEL DAVI

- Test Package To discuss this sample report, contact Customer Service at 1-800-237-1369.
- * Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Certificate L2367

T:

F: