


PROBLEM SUMMARY

Area [001] Machine Id NOT GIVEN PCA0081426

Transmission Fluid NOT GIVEN (--- QTS)

COMPONENT CONDITION SUMMARY

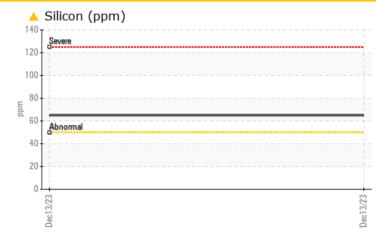

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

| PROBLEMATIC | C TEST | RESULT | S | | |
|---------------|--------|-------------|-----|----------|------|
| Sample Status | | | | ABNORMAL | |
| Silicon | ppm | ASTM D5185m | >50 | <u> </u> | |


Customer Id: PERPRIPCA Sample No.: PCA0081426 Lab Number: 06033911 Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data: Jonathan Hester +1 919-379-4092 x4092 <u>jhester@wearcheckusa.com</u>

To change component or sample information: Customer Service +1 1-800-237-1369 <u>customerservice@wearcheck.com</u>

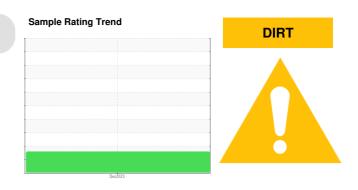

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS



OIL ANALYSIS REPORT

Sample Rating Trend

DIRT

[001] Machine II NOT GIVEN PCA0081426

Component Transmission Fluid NOT GIVEN (--- QTS)

DIAGNOSIS

A Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

Elemental level of silicon (Si) above normal indicating ingress of seal material.

Fluid Condition


The condition of the fluid is acceptable for the time in service.

| | | | | Dec2023 | | |
|--|--|--|--------------------------------------|--------------------------------------|----------|----------|
| SAMPLE INFORM | ATION | method | limit/base | current | history1 | history2 |
| Sample Number | | Client Info | | PCA0081426 | | |
| Sample Date | | Client Info | | 13 Dec 2023 | | |
| Machine Age | mls | Client Info | | 121070 | | |
| Oil Age | mls | Client Info | | 0 | | |
| Oil Changed | | Client Info | | N/A | | |
| Sample Status | | | | ABNORMAL | | |
| CONTAMINATIO | N | method | limit/base | current | history1 | history2 |
| Water | | WC Method | >0.1 | NEG | | |
| WEAR METALS | | method | limit/base | current | history1 | history2 |
| Iron | ppm | ASTM D5185m | >200 | 53 | | |
| Chromium | ppm | ASTM D5185m | >10 | <1 | | |
| Nickel | ppm | ASTM D5185m | | <1 | | |
| Titanium | ppm | ASTM D5185m | | 0 | | |
| Silver | ppm | ASTM D5185m | | 0 | | |
| | ppm | ASTM D5185m | >50 | 1 | | |
| | ppm | ASTM D5185m | >50 | 0 | | |
| - | ppm | ASTM D5185m | >200 | 54 | | |
| | ppm | ASTM D5185m | >10 | 0 | | |
| | ppm | ASTM D5185m | - | 0 | | |
| | ppm | ASTM D5185m | | 0 | | |
| ADDITIVES | | method | limit/base | current | history1 | history2 |
| Boron | ppm | ASTM D5185m | | 0 | | |
| | ppm | ASTM D5185m | | 0 | | |
| | ppm | ASTM D5185m | | <1 | | |
| | ppm | ASTM D5185m | | 25 | | |
| | ppm | ASTM D5185m | | 2 | | |
| | ppm | ASTM D5185m | | 867 | | |
| | | ASTM D5185m | | 647 | | |
| | ppm | ASTM D5185m | | 0 | | |
| | ppm | | | | | |
| | ppm | ASTM D5185m | | 5372 | | |
| CONTAMINANT | S | method | limit/base | current | history1 | history2 |
| | ppm | ASTM D5185m | >50 | <u> </u> | | |
| Sodium | ppm | ASTM D5185m | | 0 | | |
| Potassium | ppm | ASTM D5185m | >20 | 2 | | |
| VISUAL | | method | limit/base | current | history1 | history2 |
| | | | | | | |
| White Metal | scalar | *Visual | NONE | NONE | | |
| | scalar scalar | *Visual *Visual | NONE NONE | NONE NONE | | |
| Yellow Metal | | | | - | | |
| Yellow Metal | scalar | *Visual | NONE | NONE | | |
| Yellow Metal s Precipitate s Silt s | scalar scalar | *Visual *Visual | NONE NONE | NONE | | |
| Yellow Metal s Precipitate s Silt s Debris s | scalar scalar scalar | *Visual *Visual *Visual | NONE NONE NONE | NONE NONE NONE | | |
| Yellow Metal s Precipitate s Silt s Debris s Sand/Dirt s | scalar scalar scalar scalar | *Visual *Visual *Visual *Visual | NONE NONE NONE NONE | NONE NONE NONE NONE | | |
| Yellow Metal s Precipitate s Silt s Debris s Sand/Dirt s Appearance s | scalar scalar scalar scalar scalar | *Visual *Visual *Visual *Visual *Visual | NONE NONE NONE NONE | NONE NONE NONE NONE | | |
| Yellow Metal s Precipitate s Silt s Debris s Sand/Dirt s Appearance s Odor s | scalar scalar scalar scalar scalar scalar | *Visual *Visual *Visual *Visual *Visual *Visual | NONE NONE NONE NONE NONE | NONE NONE NONE NONE NORE | | |

Contact/Location: MICHAEL DAVIS - PERPRIPCA



OIL ANALYSIS REPORT

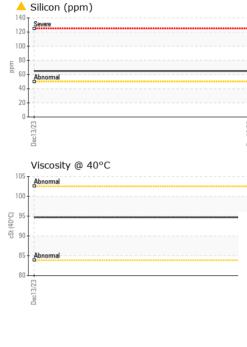

| | FLUID PRO | | | limit/base | current | nistory i | nistory |
|---------------|--------------------------------|--------------------|-----------------|--------------------------|----------|----------------------------|-------------------|
| | Visc @ 40°C | cSt | ASTM D445 | | 94.7 | | |
| | SAMPLE IN | IAGES | method | limit/base | current | history1 | history |
| | Color | | | | no image | no image | no image |
| 23 | 00101 | | | | no image | no image | no inage |
| Dec13/23 | | | | | | | |
| | Bottom | | | | no image | no image | no image |
| | GRAPHS | | | | |] | |
| | Ferrous Alloys | | | | | | |
| | 50 - iron 45 - iron iron | | | | | | |
| | 40 | | | | | | |
| Maa | 30 - 25 - | | | | | | |
| | 20 - | | | | | | |
| | 15- 10- | | | | | | |
| | 5 | | | | | | |
| | Dec13/23 | | | Dec13/23 | | | |
| | Non-ferrous M | letals | | | | | |
| | 55 50 copper | | | | | | |
| | 45 - 40 | | | | | | |
| _ | 35- | | | | | | |
| Laa | 30 25 20 | | | | | | |
| | 15- | | | | | | |
| | 10 | | | | | | |
| | Dec13/23 | | ******* | Dec13/23 | | | |
| | | | | Deci | | | |
| | Viscosity @ 40 | | | ,- | | | |
| | 102 | | | | | | |
| | 98 | | | | | | |
| cSt (40°C) | 94 | | | | | | |
| 3 | 90 | | | | | | |
| | 88 | | | | | | |
| | 84 Abnormal 82 | | ****** | - | | | |
| | Dec13/23 | | | Dec13/23 | | | |
| | | | | | | | |
| ory No. | : WearCheck US : PCA0081426 | Recieve | d : 13 🛙 | Dec 2023 | PERDU | | ARDWARE |
| nber umber | : 06033911 : 10789140 | Diagnos Diagnos | | Dec 2023 athan Hester | | PRINCE | EGEORGE, US 23 |
| ckage | : FLEET ontact Customer S | - | | , | MICL | Contact: M #AELP.DAVIS@ | ICHAEL DA |
| | e outside of the IS | | | | WIGI | | |

FLUID PROPERTIES method limit/base current history1 history2

* - Denotes test method Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

To discuss this sample

Certificate L2367