


OIL ANALYSIS REPORT

T



NORMAL



Machine Id **642708**

Component **Diesel Engine**

PETRO CANADA DURON SHP 10W30 (--- QTS)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Wear

Metal levels are typical for a new component breaking in.

Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.


Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

QTS)				Dec2023		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PCA0113402		
Sample Date		Client Info		08 Dec 2023		
Machine Age	mls	Client Info		21866		
Oil Age	mls	Client Info		0		
Oil Changed		Client Info		Not Changd		
Sample Status				NORMAL		
CONTAMINAT	ION	method	limit/base	current	history1	history2
Fuel		WC Method	>5	<1.0		
Water		WC Method	>0.2	NEG		
Glycol		WC Method		NEG		
WEAR METAL	S	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	56		
Chromium	ppm	ASTM D5185m	>20	6		
Nickel	ppm	ASTM D5185m	>4	<1		
Titanium	ppm	ASTM D5185m		<1		
Silver	ppm	ASTM D5185m	>3	<1		
Aluminum	ppm	ASTM D5185m	>20	51		
Lead	ppm	ASTM D5185m	>40	0		
Copper	ppm	ASTM D5185m	>330	254		
Tin	ppm	ASTM D5185m	>15	4		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	18		
Barium	ppm	ASTM D5185m	0	0		
Molybdenum	ppm	ASTM D5185m	50	71		
Manganese	ppm	ASTM D5185m	0	4		
Magnesium	ppm	ASTM D5185m	950	1005		
Calcium	ppm	ASTM D5185m	1050	1760		
Phosphorus	ppm	ASTM D5185m	995	1196		
Zinc Sulfur	ppm	ASTM D5185m ASTM D5185m	1180	1465 2812		
	ppm		2600			
CONTAMINAN		method	limit/base	current	history1	history2
Silicon Sodium	ppm	ASTM D5185m ASTM D5185m	>25	8 4		
Potassium	ppm	ASTM D5185m	- 20	123		
	ppm		>20			
INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.7		
Nitration	Abs/cm	*ASTM D7624	>20	11.3		
Sulfation	Abs/.1mm	*ASTM D7415	>30	25.8		
FLUID DEGRAD	DATION		limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	24.7		
Base Number (BN)	mg KOH/g	ASTM D2896		8.3		



OIL ANALYSIS REPORT

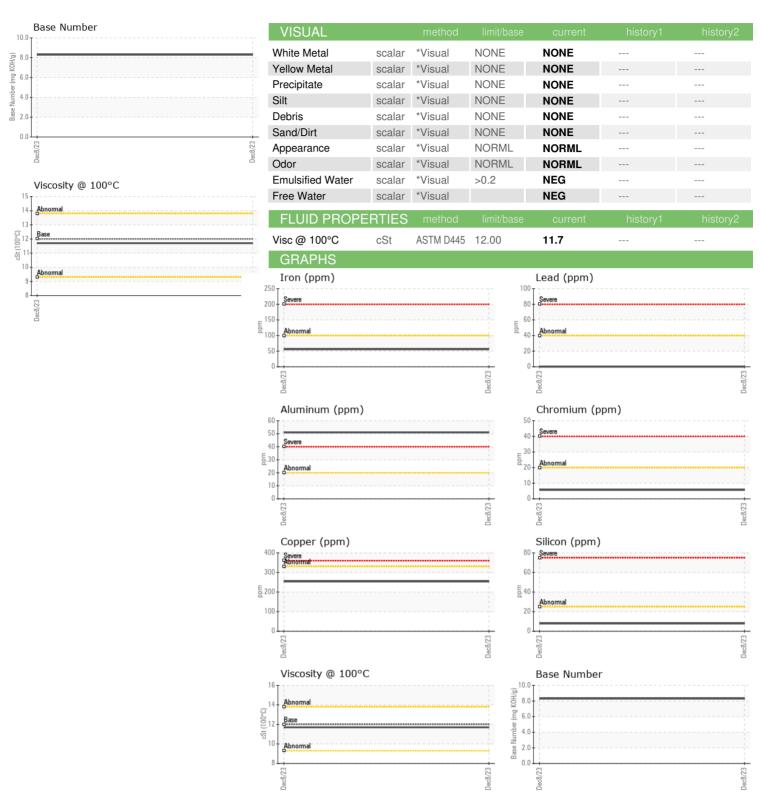





Laboratory Sample No. Lab Number **Unique Number**

: PCA0113402 : 06034025 : 10789254

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 13 Dec 2023 Diagnosed

: 14 Dec 2023 Diagnostician : Wes Davis

Test Package : MOB 1 (Additional Tests: TBN)

To discuss this sample report, contact Customer Service at 1-800-237-1369. * - Denotes test methods that are outside of the ISO 17025 scope of accreditation. **MILLER TRUCK LEASING #119** 39 INDUSTRIAL AVE HASBROUCK HEIGHTS, NJ

US 07604 Contact: MIKE LONGETTE

mlongette@millertransgroup.com

T: Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) F: (201)528-7053

Contact/Location: MIKE LONGETTE - MILRUT