

OIL ANALYSIS REPORT

Sample Rating Trend



Machine Id 642276

Component Diesel Engine

Fluid PETRO CANADA DURON SHP 10W30 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

Elevated aluminum (AI) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. No other contaminants were detected in the oil.


Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

GAL)			Aug2023	Dec2023		
SAMPLE INFOF	RMATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PCA0113338	PCA0103007	
Sample Date		Client Info		05 Dec 2023	02 Aug 2023	
Machine Age	mls	Client Info		16753	6523	
Oil Age	mls	Client Info		0	0	
Oil Changed		Client Info		N/A	Not Changd	
Sample Status				NORMAL	NORMAL	
CONTAMINA	ΓΙΟΝ	method	limit/base	current	history1	history2
Fuel		WC Method	>5	<1.0	<1.0	
Water		WC Method	>0.2	NEG	NEG	
Glycol		WC Method		NEG	NEG	
WEAR METAI	_S	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	53	31	
Chromium	ppm	ASTM D5185m	>20	2	1	
Nickel	ppm	ASTM D5185m	>4	1	<1	
Titanium	ppm	ASTM D5185m		<1	<1	
Silver	ppm	ASTM D5185m	>3	<1	<1	
Aluminum	ppm	ASTM D5185m	>20	17	5	
Lead	ppm	ASTM D5185m	>40	0	<1	
Copper	ppm	ASTM D5185m	>330	156	72	
Tin	ppm	ASTM D5185m	>15	6	5	
Vanadium	ppm	ASTM D5185m		0	<1	
Cadmium	ppm	ASTM D5185m		0	0	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	37	56	
Barium	ppm	ASTM D5185m	0	0	0	
Molybdenum	ppm	ASTM D5185m	50	41	40	
Manganese	ppm	ASTM D5185m	0	3	2	
Magnesium	ppm	ASTM D5185m	950	516	509	
Calcium	ppm	ASTM D5185m	1050	1662	1691	
Phosphorus	ppm	ASTM D5185m	995	732	726	
Zinc	ppm	ASTM D5185m	1180	910	905	
Sulfur	ppm	ASTM D5185m	2600	2109	2694	
CONTAMINA	NTS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	7	6	
Sodium	ppm	ASTM D5185m		6	7	
Potassium	ppm	ASTM D5185m	>20	62	22	
INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.6	0.3	
Nitration	Abs/cm	*ASTM D7624	>20	8.7	6.3	
Sulfation	Abs/.1mm	*ASTM D7415	>30	23.2	22.1	
FLUID DEGRA	DATION	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	21.8	19.5	
Base Number (BN)	mg KOH/g	ASTM D2896		7.0	9.0	



OIL ANALYSIS REPORT

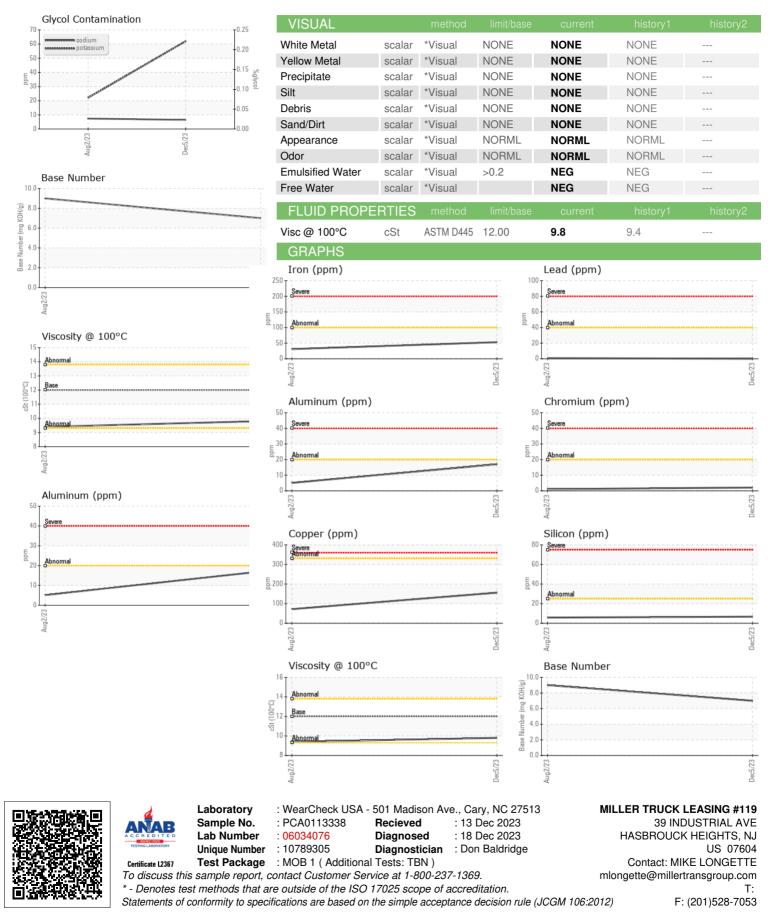

Contact/Location: MIKE LONGETTE - MILRUT