




PROBLEM SUMMARY

Sample Rating Trend

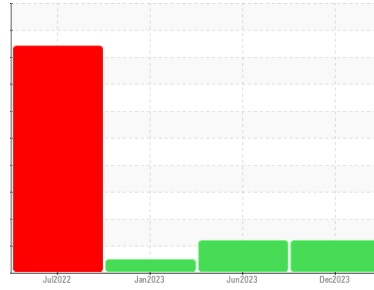


GLYCOL



Machine Id
726068
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

COMPONENT CONDITION SUMMARY

▲ Glycol Contamination

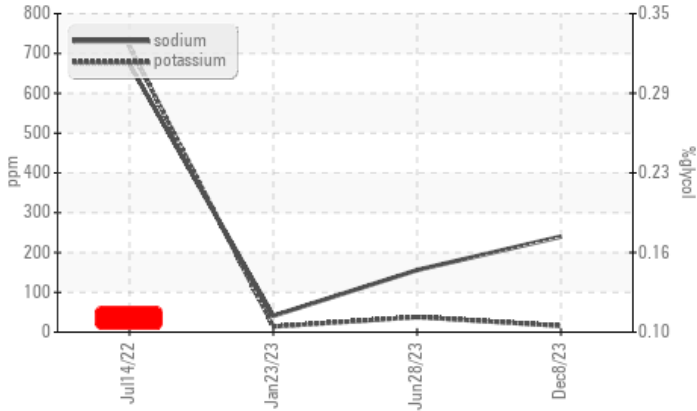

RECOMMENDATION

We advise that you check for the source of the coolant leak. Check for low coolant level. We recommend an early resample to monitor this condition.

PROBLEMATIC TEST RESULTS

Sample Status			ABNORMAL	ABNORMAL	NORMAL
Sodium	ppm	ASTM D5185m	▲ 240	▲ 156	41

Customer Id: GFL641
 Sample No.: GFL0097470
 Lab Number: 06034372
 Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Jonathan Hester +1 919-379-4092 x4092
jhester@wearcheckusa.com

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Resample	---	---	?	We recommend an early resample to monitor this condition.
Check Glycol Access	---	---	?	We advise that you check for the source of the coolant leak.

HISTORICAL DIAGNOSIS

28 Jun 2023 Diag: Angela Borella

GLYCOL



We advise that you check for the source of the coolant leak. Check for low coolant level. Resample at the next service interval to monitor. All component wear rates are normal. Sodium and/or potassium levels are high. The BN result indicates that there is suitable alkalinity remaining in the oil.

[view report](#)



23 Jan 2023 Diag: Jonathan Hester

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

[view report](#)



14 Jul 2022 Diag: Don Baldrige

GLYCOL



We advise that you check for the source of the coolant leak. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition. NOTE: High glycol in the sample has limited the accuracy of Total Base Number (TBN) value. All component wear rates are normal. Sodium and/or potassium levels are high. There is a high concentration of glycol present in the oil. The oil is no longer serviceable due to the presence of contaminants.


[view report](#)





OIL ANALYSIS REPORT

Sample Rating Trend

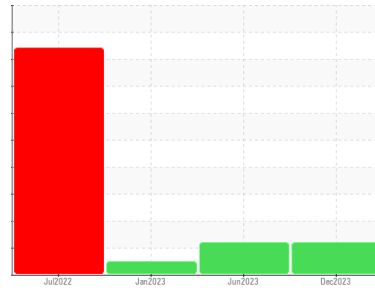

GLYCOL



Machine Id
726068

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

▲ Recommendation

We advise that you check for the source of the coolant leak. Check for low coolant level. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

Contamination

Sodium and/or potassium levels are high.

▲ Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0097470	GFL0015792	GFL0067544
Sample Date	Client Info		08 Dec 2023	28 Jun 2023	23 Jan 2023
Machine Age	hrs	Client Info	17571	17571	17277
Oil Age	hrs	Client Info	17571	17571	17571
Oil Changed	Client Info		N/A	N/A	N/A
Sample Status			ABNORMAL	ABNORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	<1.0	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >80	69	29	9
Chromium	ppm	ASTM D5185m >5	6	5	<1
Nickel	ppm	ASTM D5185m >2	2	2	0
Titanium	ppm	ASTM D5185m	<1	2	0
Silver	ppm	ASTM D5185m >3	0	1	<1
Aluminum	ppm	ASTM D5185m >30	5	9	1
Lead	ppm	ASTM D5185m >30	3	6	2
Copper	ppm	ASTM D5185m >150	4	6	5
Tin	ppm	ASTM D5185m >5	0	2	<1
Vanadium	ppm	ASTM D5185m	<1	1	0
Cadmium	ppm	ASTM D5185m	0	2	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	23	9	37
Barium	ppm	ASTM D5185m 0	0	19	0
Molybdenum	ppm	ASTM D5185m 60	69	60	16
Manganese	ppm	ASTM D5185m 0	<1	3	<1
Magnesium	ppm	ASTM D5185m 1010	916	846	554
Calcium	ppm	ASTM D5185m 1070	1126	1161	1047
Phosphorus	ppm	ASTM D5185m 1150	1031	892	622
Zinc	ppm	ASTM D5185m 1270	1289	1088	837
Sulfur	ppm	ASTM D5185m 2060	2482	3299	3187

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	13	12	6
Sodium	ppm	ASTM D5185m	▲ 240	▲ 156	41
Potassium	ppm	ASTM D5185m >20	16	38	14
Glycol	%	*ASTM D2982	NEG	NEG	NEG

INFRA-RED




	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.2	0.3	0.1
Nitration	Abs/cm	*ASTM D7624 >20	7.8	9.0	5.7
Sulfation	Abs/.1mm	*ASTM D7415 >30	18.5	20.2	17.3

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	13.7	15.5	11.5
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	10.6	10.0	9.4







OIL ANALYSIS REPORT

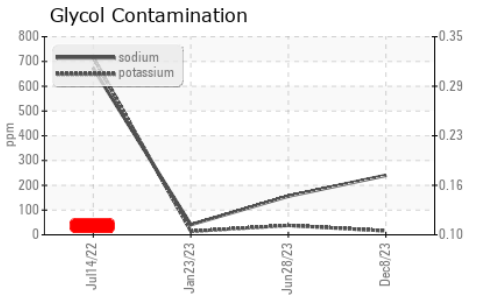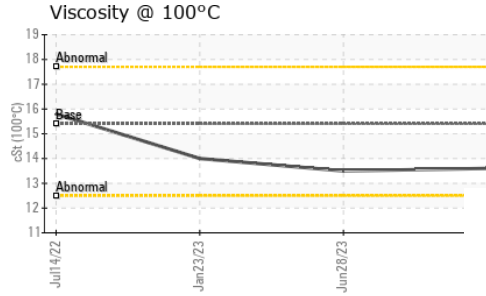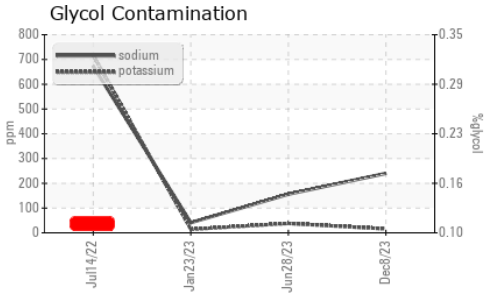

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	13.6	13.5	14.0

GRAPHS

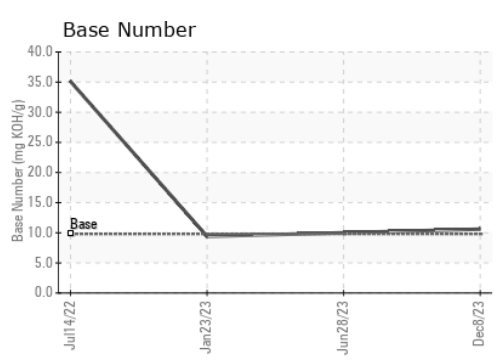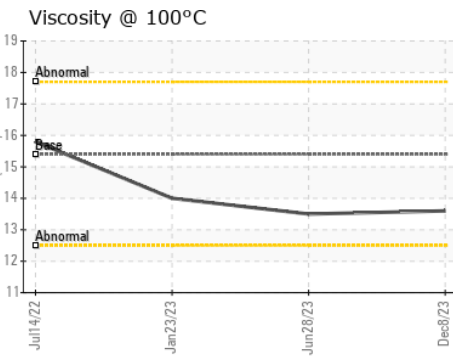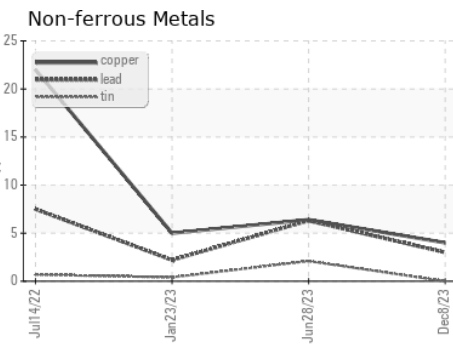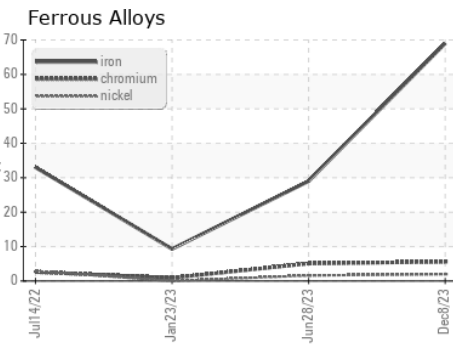

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0097470 **Recieved** : 14 Dec 2023
Lab Number : **06034372** **Diagnosed** : 18 Dec 2023
Unique Number : 10789601 **Diagnostician** : Jonathan Hester
Test Package : FLEET (Additional Tests: Glycol)

GFL Environmental - 641 - Alpena
 1241 KING SETTLEMENT RD
 ALPENA, MI
 US 49707
 Contact: DYLAN TOLAN
 dylan.tolan@gflenv.com
 T: (989)854-7203
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)