

## **OIL ANALYSIS REPORT**







Machine Id **215** Component **Diesel Engine** Fluid

PETRO CANADA DURON SHP 10W30 (--- GAL)

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

Metal levels are typical for a components first oil change.

#### Contamination

There is no indication of any contamination in the oil.


#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORI	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PCA0114041		
Sample Date		Client Info		05 Dec 2023		
Machine Age	mls	Client Info		257884		
Oil Age	mls	Client Info		257884		
Oil Changed		Client Info		Changed		
Sample Status				NORMAL		
CONTAMINAT	ION	method	limit/base	current	history1	history2
Fuel		WC Method	>5	<1.0		
Water		WC Method	>0.2	NEG		
Glycol		WC Method		NEG		
WEAR METAL	S	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	48		
Chromium	ppm	ASTM D5185m	>20	<1		
Nickel	ppm	ASTM D5185m	>4	0		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m	>3	0		
Aluminum	ppm	ASTM D5185m	>20	9		
Lead	ppm	ASTM D5185m	>40	<1		
Copper	ppm	ASTM D5185m	>330	2		
Tin	ppm	ASTM D5185m	>15	<1		
Vanadium	ppm	ASTM D5185m		0		
Cadmium		AOTH DEADE		-		
Gaumum	ppm	ASTM D5185m		0		
ADDITIVES	ppm	method	limit/base	0 current	 history1	history2
	ppm		limit/base	-		
ADDITIVES		method		current	history1	history2
ADDITIVES Boron	ppm	method ASTM D5185m	2	current 2	history1	history2
ADDITIVES Boron Barium	ppm ppm	method ASTM D5185m ASTM D5185m	2 0	current 2 0	history1 	history2 
ADDITIVES Boron Barium Molybdenum	ppm ppm ppm	method ASTM D5185m ASTM D5185m ASTM D5185m	2 0 50	current 2 0 63	history1  	history2  
ADDITIVES Boron Barium Molybdenum Manganese	ppm ppm ppm ppm	method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	2 0 50 0	current 2 0 63 <1	history1   	history2   
ADDITIVES Boron Barium Molybdenum Manganese Magnesium	ppm ppm ppm ppm ppm	method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	2 0 50 0 950	current 2 0 63 <1 984	history1   	history2   
ADDITIVES Boron Barium Molybdenum Manganese Magnesium Calcium	ppm ppm ppm ppm ppm ppm	method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	2 0 50 0 950 1050	current           2           0           63           <1           984           1093	history1	history2
ADDITIVES Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus	ppm ppm ppm ppm ppm ppm ppm	method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	2 0 50 0 950 1050 995	current           2           0           63           <1           984           1093           1076	history1	history2
ADDITIVES Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc	ppm ppm ppm ppm ppm ppm ppm ppm	method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	2 0 50 950 1050 995 1180	current           2           0           63           <1           984           1093           1076           1348	history1	history2
ADDITIVES Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur	ppm ppm ppm ppm ppm ppm ppm ppm	method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	2 0 50 0 950 1050 995 1180 2600	Current 2 0 63 <1 984 1093 1076 1348 2816	history1	history2
ADDITIVES Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN	ppm ppm ppm ppm ppm ppm ppm ppm ppm	method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	2 0 50 950 1050 995 1180 2600	current           2           0           63           <1           984           1093           1076           1348           2816           current	history1 history1	history2
ADDITIVES Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	2 0 50 0 950 1050 995 1180 2600 <b>limit/base</b>	current           2           0           63           <1           984           1093           1076           1348           2816           current           12	history1 history1	history2 history2
ADDITIVES Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	method           ASTM D5185m	2 0 50 0 950 1050 995 1180 2600 <b>limit/base</b>	current           2           0           63           <1           984           1093           1076           1348           2816           current           12           24	history1	history2
ADDITIVES Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED Soot %	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	method           ASTM D5185m	2 0 50 0 950 1050 995 1180 2600 <b>Imit/base</b> >25 >20 <b>Imit/base</b> >3	current           2           0           63           <1           984           1093           1076           1348           2816           current           12           24           2	history1 history1 history1	history2 history2
ADDITIVES Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	method           ASTM D5185m	2 0 50 0 950 1050 995 1180 2600 <b>Imit/base</b> >25 >20 <b>Imit/base</b> >3	current           2           0           63           <1           984           1093           1076           1348           2816           current           12           24           2           current	history1 history1 history1 history1	history2 history2 history2 history2
ADDITIVES Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED Soot %	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	method           ASTM D5185m	2 0 50 0 950 1050 995 1180 2600 limit/base >25 >20 limit/base >3	current           2           0           63           <1           984           1093           1076           1348           2816           current           12           24           2           current           12           24           2           current           1	history1 history1 history1 history1	history2 history2 history2 history2
ADDITIVES Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED Soot % Nitration	ppm ppm ppm ppm ppm ppm ppm ppm ppm <b>TS</b> ppm ppm ppm	method           ASTM D5185m           ASTM D5185m	2 0 50 950 1050 995 1180 2600 <i>imit/base</i> >25 >20 <i>imit/base</i> >3 >20	current         2         0         63         <1         984         1093         1076         1348         2816         current         12         24         2         current         1         1.1.2	history1   history1               history1	history2 <tr tr=""></tr>
ADDITIVES Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED Soot % Nitration Sulfation	ppm ppm ppm ppm ppm ppm ppm ppm ppm <b>TS</b> ppm ppm ppm	method           ASTM D5185m           ASTM D5185m	2 0 50 0 950 1050 995 1180 2600 <b>imit/base</b> >25 20 <b>imit/base</b> >3 >20 >3	current           2           0           63           <1           984           1093           1076           1348           2816           current           12           24           2           current           1           11.2           23.5	history1	history2   history2               history2




# **OIL ANALYSIS REPORT**



#### Viscosity @ 100°C



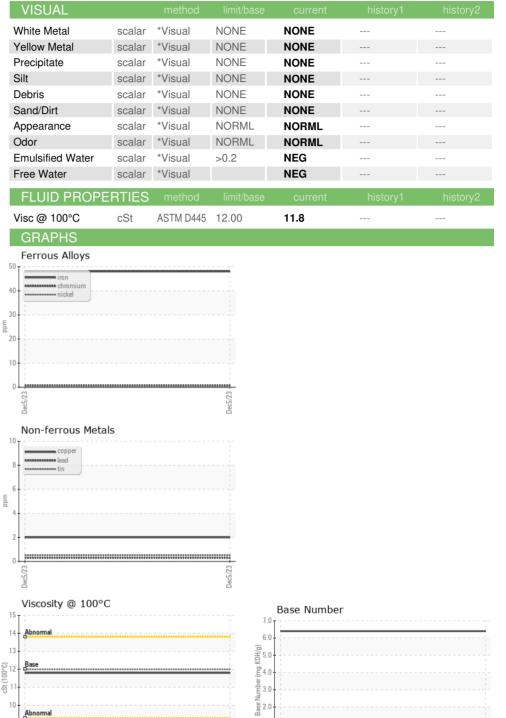

1.0

Dec5/23

Dec5/23

: 14 Dec 2023

: 15 Dec 2023

: Wes Davis



 Certificate 12367
 Test Package
 : FLEET

 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 j

 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

: WearCheck USA - 501 Madison Ave., Cary, NC 27513

Diagnostician

Received

Diagnosed

8

Laboratory

Sample No.

Lab Number

Unique Number

ler5/73

: PCA0114041

: 06034388

: 10789617

BLUE MAX TRUCKING 1015 E. WESTINGHOUSE BLVD. CHARLOTTE, NC US 28273 Contact: Jody Greer jgreer@bluemaxtrucking.com T: (980)225-9968 2012) F: (704)588-2901