




OIL ANALYSIS REPORT

Sample Rating Trend

WEAR



Machine Id
913015
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 15W40 (11 GAL)

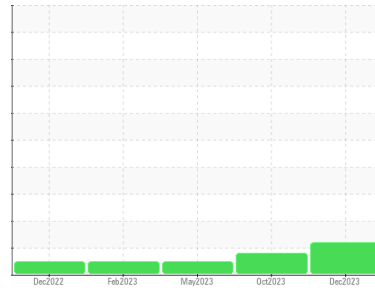

DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

Valve wear is indicated.

Contamination

Fuel content negligible. There is no indication of any contamination in the oil.

Fluid Condition

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0092456	GFL0092478	GFL0074596
Sample Date	Client Info	11 Dec 2023	04 Oct 2023	04 May 2023
Machine Age	hrs	3584	3038	2853
Oil Age	hrs	546	198	0
Oil Changed	Client Info	Changed	Changed	Changed
Sample Status		ATTENTION	ABNORMAL	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.2	NEG	NEG	NEG
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >120	11	10	14
Chromium	ppm ASTM D5185m >20	<1	<1	<1
Nickel	ppm ASTM D5185m >5	8	12	3
Titanium	ppm ASTM D5185m >2	0	0	0
Silver	ppm ASTM D5185m >2	0	0	<1
Aluminum	ppm ASTM D5185m >20	1	7	0
Lead	ppm ASTM D5185m >40	0	<1	0
Copper	ppm ASTM D5185m >330	2	4	4
Tin	ppm ASTM D5185m >15	<1	<1	<1
Vanadium	ppm ASTM D5185m	0	0	0
Cadmium	ppm ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	2	5	6
Barium	ppm ASTM D5185m 0	0	0	0
Molybdenum	ppm ASTM D5185m 60	51	68	64
Manganese	ppm ASTM D5185m 0	0	<1	<1
Magnesium	ppm ASTM D5185m 1010	728	914	933
Calcium	ppm ASTM D5185m 1070	845	1064	1066
Phosphorus	ppm ASTM D5185m 1150	765	1023	971
Zinc	ppm ASTM D5185m 1270	970	1228	1225
Sulfur	ppm ASTM D5185m 2060	2551	3346	3286

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	3	5	4
Sodium	ppm ASTM D5185m	3	4	2
Potassium	ppm ASTM D5185m >20	2	1	<1
Fuel	% ASTM D3524 >3.0	0.2	<1.0	<1.0

INFRA-RED





method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >4	0.4	0.3	0.5
Nitration	Abs/cm *ASTM D7624 >20	7.6	6.3	8.0
Sulfation	Abs/.1mm *ASTM D7415 >30	18.3	17.7	18.0

FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	13.8	13.6	15.1
Base Number (BN)	mg KOH/g ASTM D2896 9.8	5.9	7.9	6.4







OIL ANALYSIS REPORT

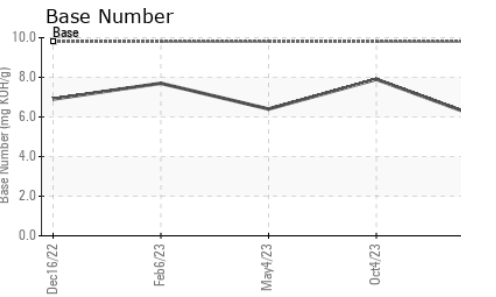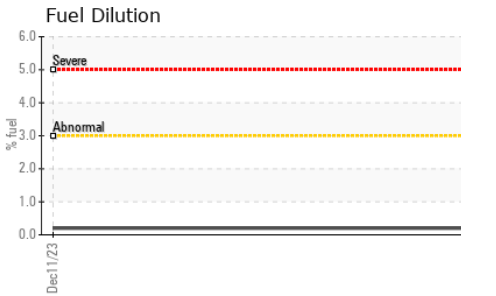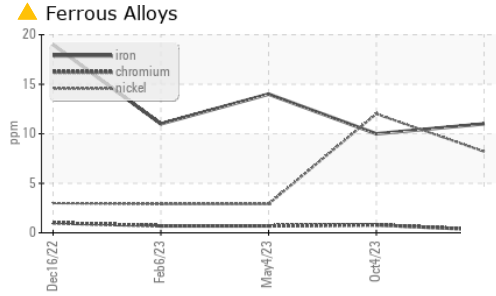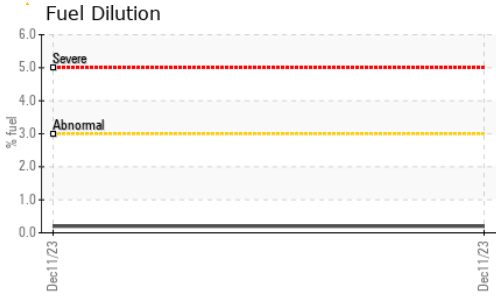

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	▲ 12.0	13.8

GRAPHS

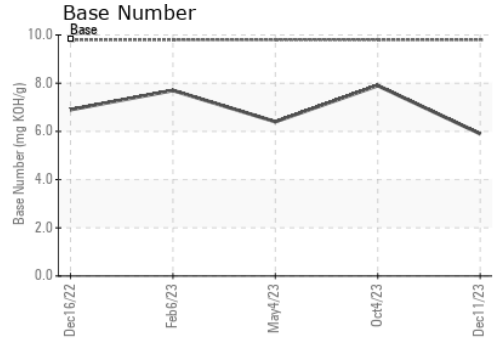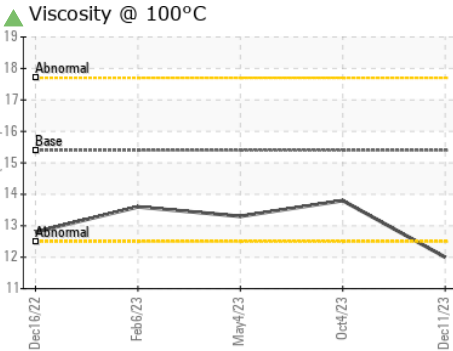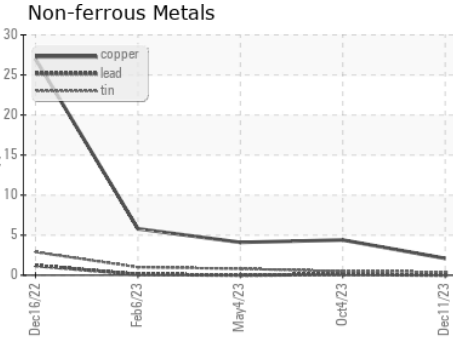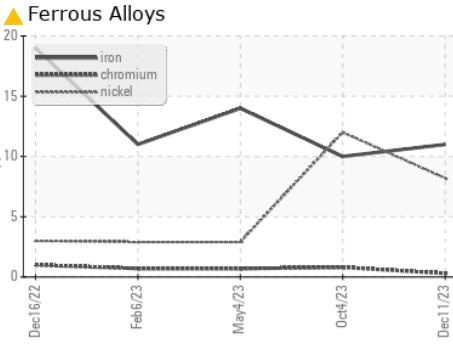

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0092456 **Recieved** : 14 Dec 2023
Lab Number : 06035011 **Diagnosed** : 20 Dec 2023
Unique Number : 10790240 **Diagnostician** : Jonathan Hester
Test Package : FLEET (Additional Tests: FuelDilution, PercentFuel)

GFL Environmental - 095 - Atlanta West
 2699 Cochran Industrial Blvd
 Douglasville, GA
 US 30127-1332
 Contact: Darrell Welch
 darrell.welch@gflenv.com
 T: (800)207-6618
 F:

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)