






PROBLEM SUMMARY

Sample Rating Trend

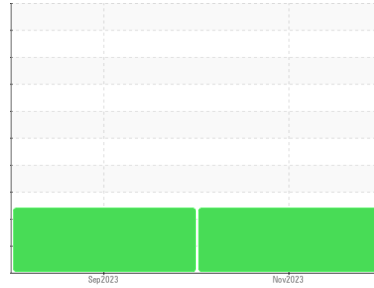

Machine Id
2227061
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 10W30 (--- QTS)

COMPONENT CONDITION SUMMARY

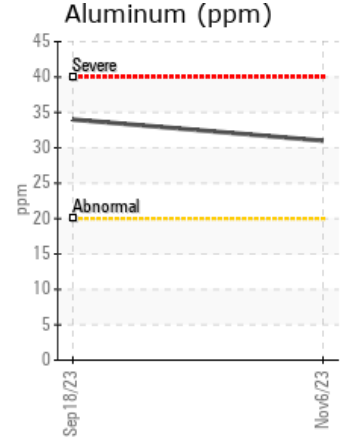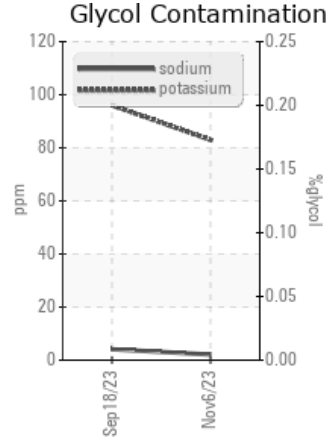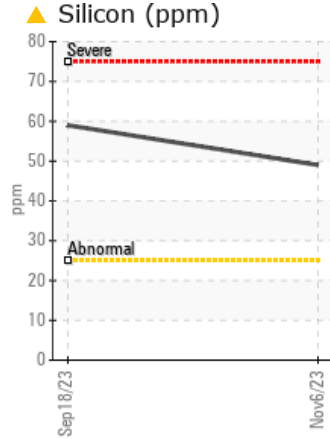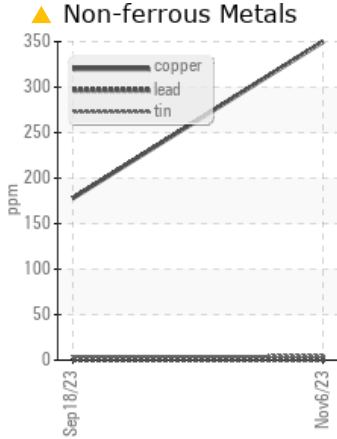

RECOMMENDATION

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

Sample Status				ABNORMAL	ABNORMAL	---
Copper	ppm	ASTM D5185m	>330	▲ 350	178	---
Silicon	ppm	ASTM D5185m	>25	▲ 49	▲ 59	---

Customer Id: PERGEODE
 Sample No.: PCA0109366
 Lab Number: 06035841
 Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Don Baldrige +1
don.b505@comcast.net

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Fluid	---	---	?	Oil and filter change at the time of sampling has been noted.
Change Filter	---	---	?	Oil and filter change at the time of sampling has been noted.

HISTORICAL DIAGNOSIS

18 Sep 2023 Diag: Don Baldrige

DIRT




We advise that you check the air filter, air induction system, and any areas where dirt may enter the component. Resample at the next service interval to monitor. All component wear rates are normal. Elemental levels of silicon (Si) and aluminum (Al) indicate alumina-silicate (coarse dirt) ingress. Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

view report



OIL ANALYSIS REPORT

Sample Rating Trend

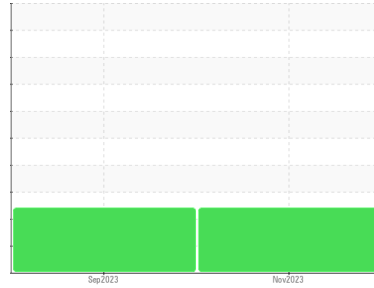

Machine Id
2227061
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 10W30 (--- QTS)

DIAGNOSIS

Recommendation
 Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear
 The copper level is abnormal. In the absence of other significant wear metals, suspect copper due to sources other than wear (i.e. cooling core). All other metal levels are typical for a new component breaking in.

Contamination
 Elemental level of silicon (Si) above normal indicating ingress of seal material. Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components.

Fluid Condition
 The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	PCA0109366	PCA0106407	---
Sample Date	Client Info	06 Nov 2023	18 Sep 2023	---
Machine Age	mls	Client Info	43386	0
Oil Age	mls	Client Info	43386	24966
Oil Changed	Client Info	Changed	Not Changd	---
Sample Status		ABNORMAL	ABNORMAL	---

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<1.0	<1.0	---
Water	WC Method >0.2	NEG	NEG	---
Glycol	WC Method	NEG	NEG	---

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	46	37	---
Chromium	ppm ASTM D5185m >20	1	<1	---
Nickel	ppm ASTM D5185m >4	2	1	---
Titanium	ppm ASTM D5185m	<1	<1	---
Silver	ppm ASTM D5185m >3	8	17	---
Aluminum	ppm ASTM D5185m >20	31	▲ 34	---
Lead	ppm ASTM D5185m >40	<1	0	---
Copper	ppm ASTM D5185m >330	▲ 350	178	---
Tin	ppm ASTM D5185m >15	4	4	---
Vanadium	ppm ASTM D5185m	0	0	---
Cadmium	ppm ASTM D5185m	<1	0	---

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 2	48	156	---
Barium	ppm ASTM D5185m 0	13	4	---
Molybdenum	ppm ASTM D5185m 50	106	117	---
Manganese	ppm ASTM D5185m 0	3	3	---
Magnesium	ppm ASTM D5185m 950	697	638	---
Calcium	ppm ASTM D5185m 1050	1425	1546	---
Phosphorus	ppm ASTM D5185m 995	730	668	---
Zinc	ppm ASTM D5185m 1180	889	826	---
Sulfur	ppm ASTM D5185m 2600	2302	2550	---

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	▲ 49	▲ 59	---
Sodium	ppm ASTM D5185m	2	4	---
Potassium	ppm ASTM D5185m >20	83	96	---






INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	0.3	0.2	---
Nitration	Abs/cm *ASTM D7624 >20	11.2	10.5	---
Sulfation	Abs/.1mm *ASTM D7415 >30	23.7	23.6	---

FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	23.0	22.4	---
Base Number (BN)	mg KOH/g ASTM D2896	6.3	7.2	---





OIL ANALYSIS REPORT

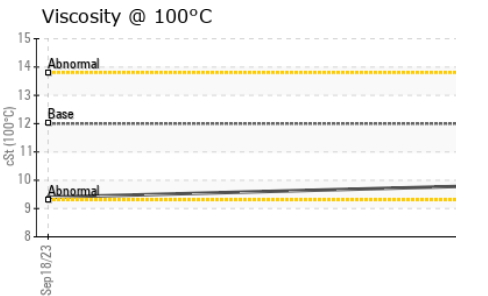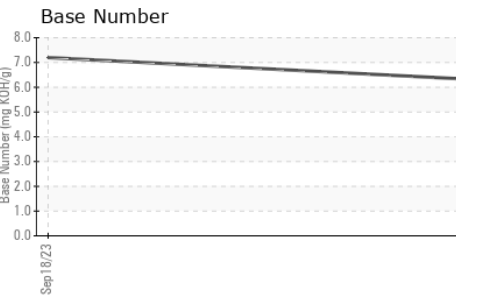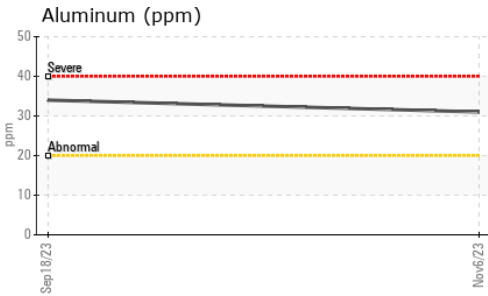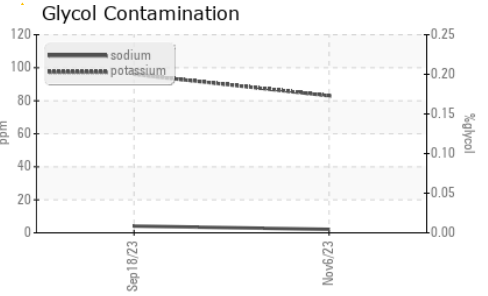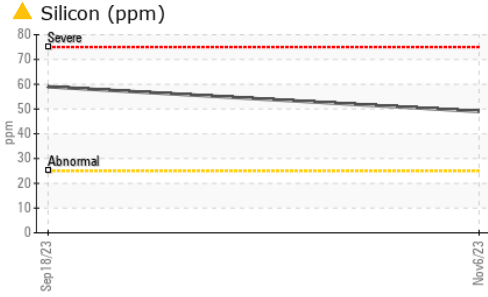

VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---
Free Water	scalar	*Visual		NEG	NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	12.00	9.8	9.4	---

GRAPHS

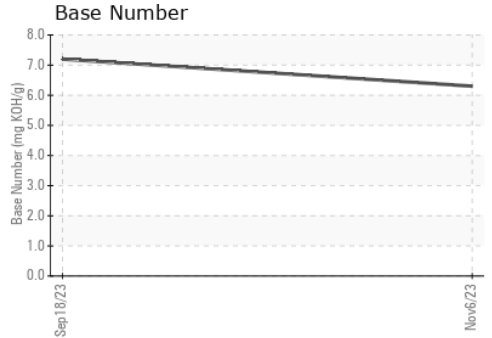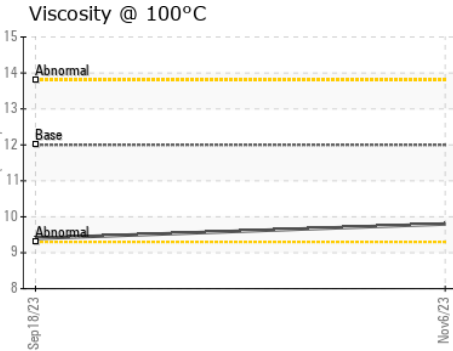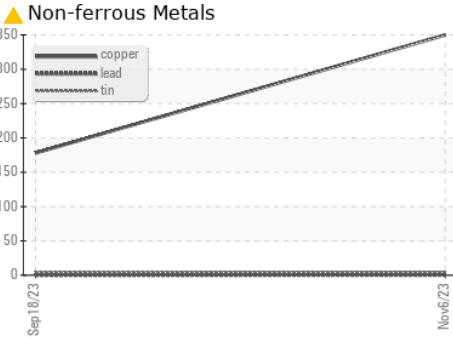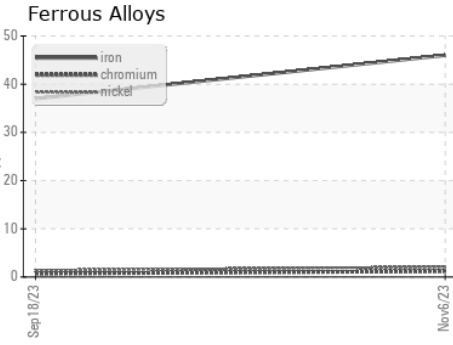

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0109366 **Received** : 15 Dec 2023
Lab Number : **06035841** **Diagnosed** : 19 Dec 2023
Unique Number : 10791070 **Diagnostician** : Don Baldrige
Test Package : FLEET

PERDUE FARMS - GEORGETOWN
 20621 SAVANAH RD
 GEORGETOWN, DE
 US 19947
 Contact: ROBERT LOCKWOOD
 Robert.Lockwood@Perdue.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: