


# OIL ANALYSIS REPORT

Sample Rating Trend



**NORMAL**

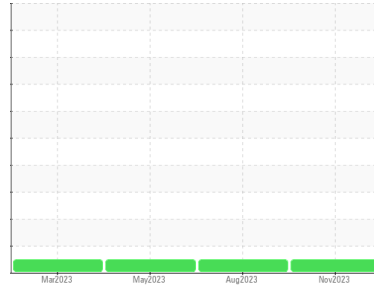

Machine Id  
**2126924**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON UHP 5W30 (--- QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PCA0109367</b>	PCA0101678	PCA0099472
Sample Date	Client Info			<b>04 Nov 2023</b>	14 Aug 2023	22 May 2023
Machine Age	mls	Client Info		<b>81623</b>	61312	0
Oil Age	mls	Client Info		<b>0</b>	39619	20000
Oil Changed	Client Info			<b>Changed</b>	Changed	Not Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2		<b>NEG</b>	NEG	NEG
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	<b>18</b>	33	17
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>4	<b>&lt;1</b>	1	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Silver	ppm	ASTM D5185m	>3	<b>&lt;1</b>	0	<1
Aluminum	ppm	ASTM D5185m	>20	<b>10</b>	17	12
Lead	ppm	ASTM D5185m	>40	<b>2</b>	2	4
Copper	ppm	ASTM D5185m	>330	<b>75</b>	125	294
Tin	ppm	ASTM D5185m	>15	<b>2</b>	3	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0



ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	<b>0</b>	4	15
Barium	ppm	ASTM D5185m	0	<b>12</b>	0	0
Molybdenum	ppm	ASTM D5185m	64	<b>59</b>	64	63
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	1	<1
Magnesium	ppm	ASTM D5185m	1160	<b>893</b>	871	908
Calcium	ppm	ASTM D5185m	820	<b>1026</b>	1120	1054
Phosphorus	ppm	ASTM D5185m	1160	<b>943</b>	840	935
Zinc	ppm	ASTM D5185m	1260	<b>1158</b>	1114	1157
Sulfur	ppm	ASTM D5185m	3000	<b>2714</b>	2598	2715

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>5</b>	8	8
Sodium	ppm	ASTM D5185m		<b>0</b>	4	2
Potassium	ppm	ASTM D5185m	>20	<b>30</b>	50	37

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>0.3</b>	0.4	0.3
Nitration	Abs/cm	*ASTM D7624	>20	<b>8.1</b>	10.4	8.9
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>19.4</b>	21.5	19.8

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>15.3</b>	18.1	16.2
Base Number (BN)	mg KOH/g	ASTM D2896	11.0	<b>7.0</b>	6.1	7.6





# OIL ANALYSIS REPORT

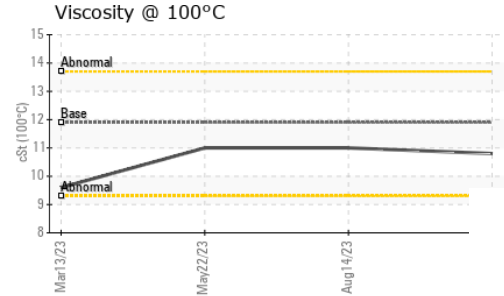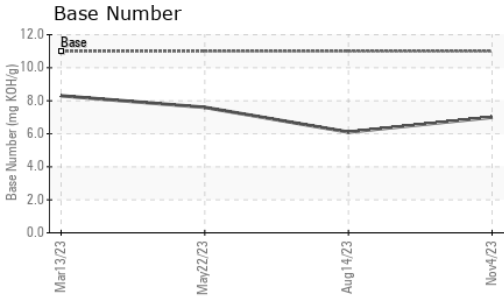

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	11.9	<b>10.8</b>	11.0

## GRAPHS

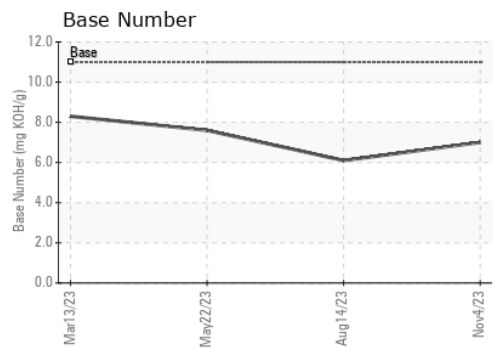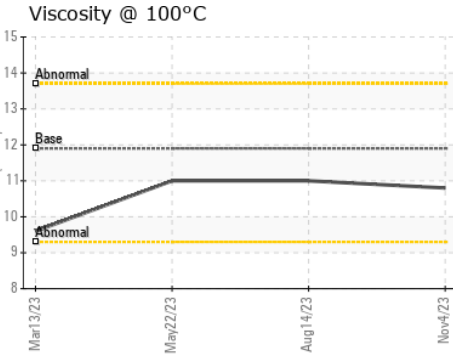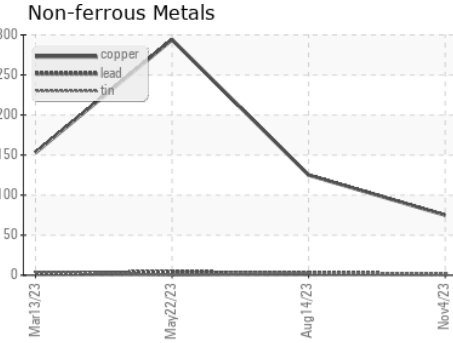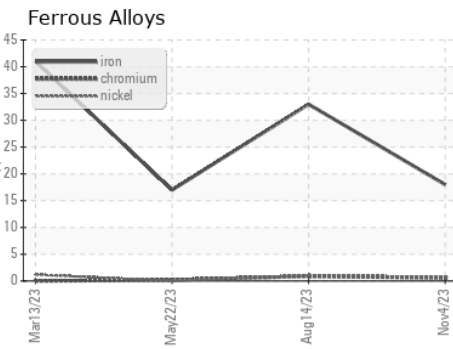

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0109367 **Recieved** : 15 Dec 2023  
**Lab Number** : **06035843** **Diagnosed** : 18 Dec 2023  
**Unique Number** : 10791072 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**PERDUE FARMS - GEORGETOWN**  
 20621 SAVANAH RD  
 GEORGETOWN, DE  
 US 19947  
 Contact: ROBERT LOCKWOOD  
 Robert.Lockwood@Perdue.com  
 T:  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)