


PROBLEM SUMMARY


Sample Rating Trend

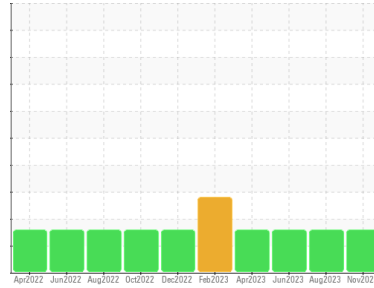

Machine Id
1926745
Component
Transmission
Fluid
PETRO CANADA TRAXON SYNTHETIC CD-50 (--- QTS)

COMPONENT CONDITION SUMMARY

▲ Silicon (ppm)

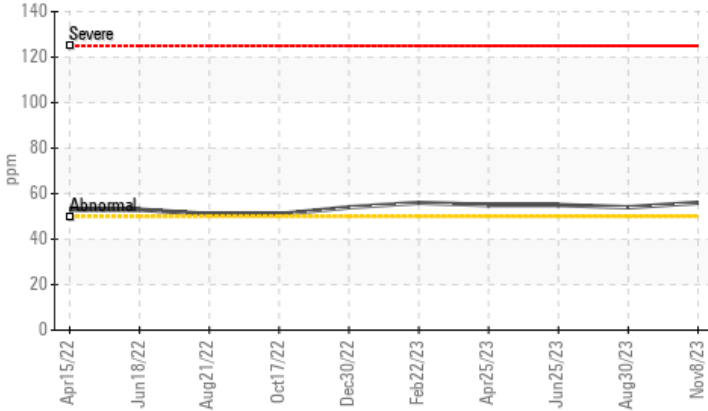

RECOMMENDATION

No corrective action is recommended at this time.
Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

Sample Status	ABNORMAL	ABNORMAL	ABNORMAL
Silicon	ppm	ASTM D5185m	>50
	▲ 56	▲ 54	▲ 55

Customer Id: PERGEODE
Sample No.: PCA0110971
Lab Number: 06036418
Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:
Don Baldrige +1
don.b505@comcast.net

To change component or sample information:
Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS

30 Aug 2023 Diag: Jonathan Hester

DIRT



No corrective action is recommended at this time. Resample at the next service interval to monitor. All component wear rates are normal. Elemental level of silicon (Si) above normal. The condition of the fluid is acceptable for the time in service.

view report



25 Jun 2023 Diag: Sean Felton

DIRT



No corrective action is recommended at this time. Resample at the next service interval to monitor. All component wear rates are normal. Elemental level of silicon (Si) above normal. The condition of the fluid is acceptable for the time in service.

view report



25 Apr 2023 Diag: Sean Felton

DIRT




No corrective action is recommended at this time. Resample at the next service interval to monitor. All component wear rates are normal. Elemental level of silicon (Si) above normal. The condition of the fluid is acceptable for the time in service.

view report



OIL ANALYSIS REPORT

Sample Rating Trend

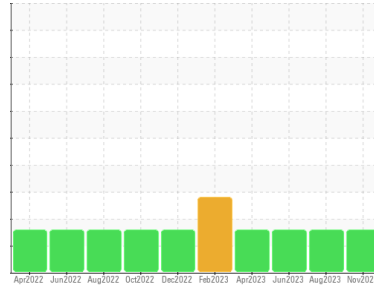

Machine Id
1926745
 Component
Transmission
 Fluid
PETRO CANADA TRAXON SYNTHETIC CD-50 (--- QTS)

DIAGNOSIS

- Recommendation**
 No corrective action is recommended at this time. Resample at the next service interval to monitor.
- Wear**
 All component wear rates are normal.
- Contamination**
 Elemental level of silicon (Si) above normal.
- Fluid Condition**
 The condition of the fluid is acceptable for the time in service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	PCA0110971	PCA0105511	PCA0100727
Sample Date	Client Info	08 Nov 2023	30 Aug 2023	25 Jun 2023
Machine Age	mls	Client Info	269209	244455
Oil Age	mls	Client Info	269209	244455
Oil Changed	Client Info	Not Chngd	Not Chngd	Not Chngd
Sample Status		ABNORMAL	ABNORMAL	ABNORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.1	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >200	28	30	28
Chromium	ppm ASTM D5185m >10	0	<1	<1
Nickel	ppm ASTM D5185m	0	0	0
Titanium	ppm ASTM D5185m	0	0	0
Silver	ppm ASTM D5185m	0	0	0
Aluminum	ppm ASTM D5185m >50	<1	1	2
Lead	ppm ASTM D5185m >50	<1	<1	0
Copper	ppm ASTM D5185m >200	65	61	60
Tin	ppm ASTM D5185m >10	0	0	0
Vanadium	ppm ASTM D5185m	0	<1	0
Cadmium	ppm ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 139	2	2	0
Barium	ppm ASTM D5185m 1	0	0	0
Molybdenum	ppm ASTM D5185m	<1	<1	0
Manganese	ppm ASTM D5185m	6	7	6
Magnesium	ppm ASTM D5185m 1	0	0	1
Calcium	ppm ASTM D5185m 30	718	710	767
Phosphorus	ppm ASTM D5185m 309	604	588	613
Zinc	ppm ASTM D5185m 1	10	0	12
Sulfur	ppm ASTM D5185m 1340	3301	3714	3944



CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >50	▲ 56	▲ 54	▲ 55
Sodium	ppm ASTM D5185m	<1	<1	1
Potassium	ppm ASTM D5185m >20	0	0	0

VISUAL

method	limit/base	current	history1	history2
White Metal	scalar *Visual NONE	NONE	NONE	NONE
Yellow Metal	scalar *Visual NONE	NONE	NONE	NONE
Precipitate	scalar *Visual NONE	NONE	NONE	NONE
Silt	scalar *Visual NONE	NONE	NONE	NONE
Debris	scalar *Visual NONE	NONE	NONE	NONE
Sand/Dirt	scalar *Visual NONE	NONE	NONE	NONE
Appearance	scalar *Visual NORML	NORML	NORML	NORML
Odor	scalar *Visual NORML	NORML	NORML	NORML
Emulsified Water	scalar *Visual >0.1	NEG	NEG	NEG
Free Water	scalar *Visual	NEG	NEG	NEG




OIL ANALYSIS REPORT

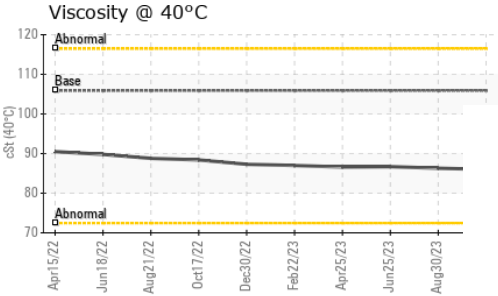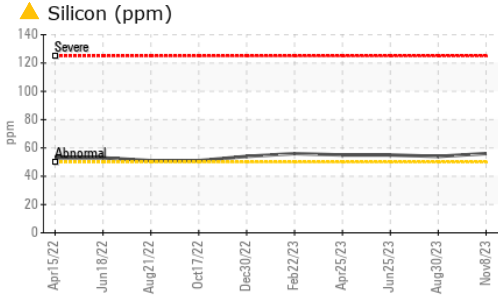

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	105.9	86.0	86.3	86.7

SAMPLE IMAGES		method	limit/base	current	history1	history2
Color					no image	no image
Bottom					no image	no image

GRAPHS

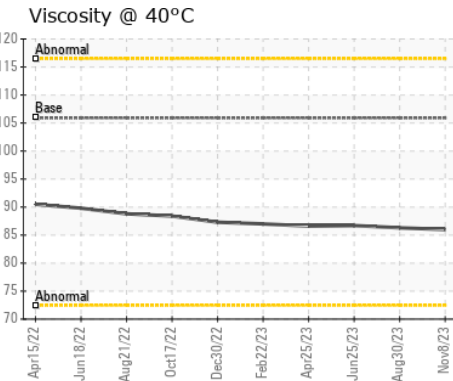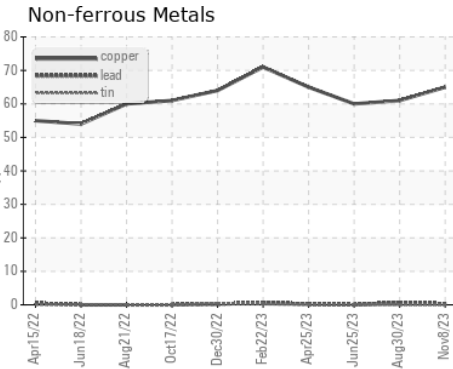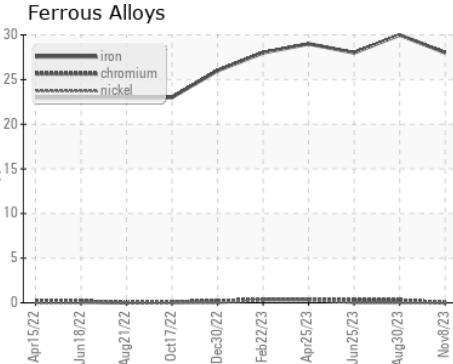

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0110971 **Recieved** : 15 Dec 2023
Lab Number : 06036418 **Diagnosed** : 19 Dec 2023
Unique Number : 10791647 **Diagnostician** : Don Baldrige
Test Package : FLEET

PERDUE FARMS - GEORGETOWN
 20621 SAVANAH RD
 GEORGETOWN, DE
 US 19947
 Contact: ROBERT LOCKWOOD
 Robert.Lockwood@Perdue.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: