


# OIL ANALYSIS REPORT

Sample Rating Trend



**NORMAL**

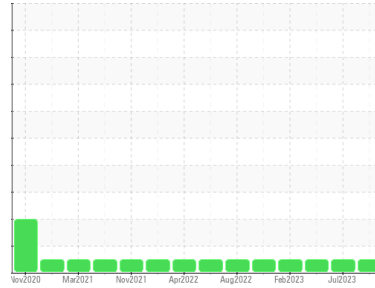

Machine Id  
**2026888**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON UHP 5W30 (35 QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0106126</b>	PCA0102151	PCA0095547
Sample Date	Client Info		<b>30 Sep 2023</b>	23 Jul 2023	09 May 2023
Machine Age	mls	Client Info	<b>335628</b>	0	0
Oil Age	mls	Client Info	<b>0</b>	20000	40000
Oil Changed	Client Info		<b>Changed</b>	Not Changd	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>6.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>31</b>	19	31
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m >2	<b>&lt;1</b>	0	<1
Titanium	ppm	ASTM D5185m	<b>1</b>	1	7
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >25	<b>3</b>	2	2
Lead	ppm	ASTM D5185m >40	<b>1</b>	<1	<1
Copper	ppm	ASTM D5185m >330	<b>7</b>	5	8
Tin	ppm	ASTM D5185m >15	<b>1</b>	<1	<1
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	<1
Cadmium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>0</b>	0	3
Barium	ppm	ASTM D5185m 0	<b>12</b>	0	0
Molybdenum	ppm	ASTM D5185m 64	<b>63</b>	61	58
Manganese	ppm	ASTM D5185m 0	<b>1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 1160	<b>962</b>	924	900
Calcium	ppm	ASTM D5185m 820	<b>1136</b>	1138	1230
Phosphorus	ppm	ASTM D5185m 1160	<b>1054</b>	1031	949
Zinc	ppm	ASTM D5185m 1260	<b>1275</b>	1232	1253
Sulfur	ppm	ASTM D5185m 3000	<b>3228</b>	3322	3744

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>17</b>	20	6
Sodium	ppm	ASTM D5185m	<b>0</b>	0	3
Potassium	ppm	ASTM D5185m >20	<b>4</b>	3	2



## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.5</b>	0.3	0.6
Nitration	Abs/cm	*ASTM D7624 >20	<b>9.7</b>	7.8	10.0
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>20.3</b>	18.3	21.9

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>15.8</b>	14.0	17.0
Base Number (BN)	mg KOH/g	ASTM D2896 11.0	<b>6.8</b>	8.3	6.1





# OIL ANALYSIS REPORT

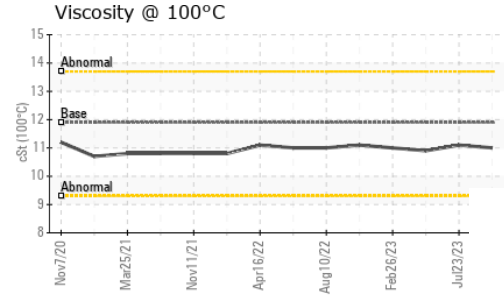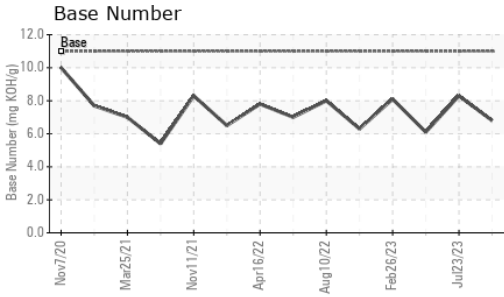

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	11.9	<b>11.0</b>	11.1	10.9

## GRAPHS

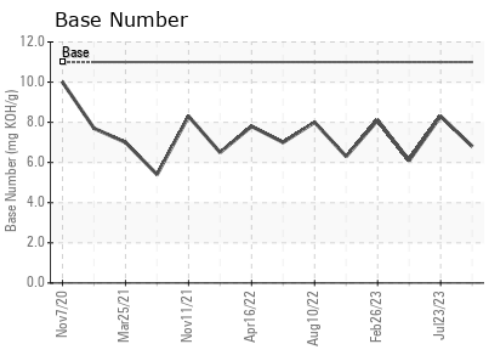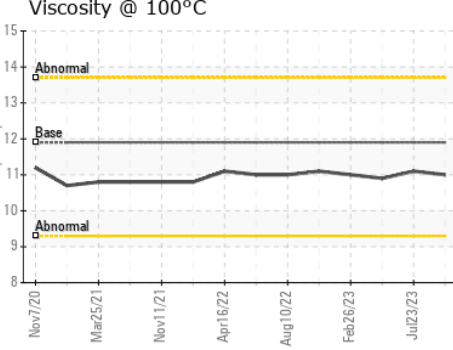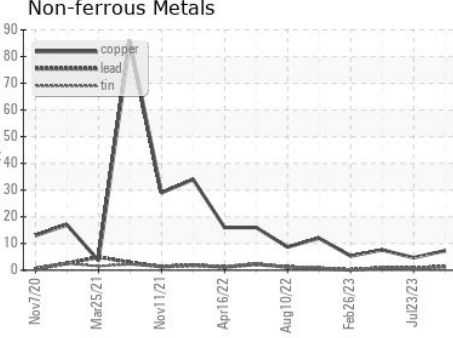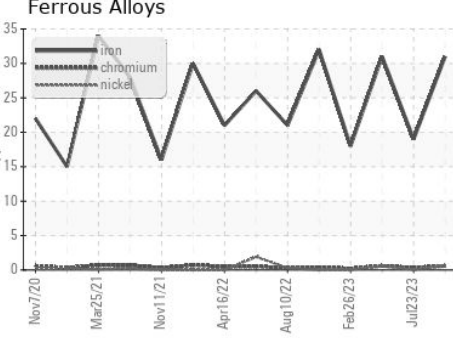

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0106126 **Recieved** : 15 Dec 2023  
**Lab Number** : **06036630** **Diagnosed** : 18 Dec 2023  
**Unique Number** : 10791859 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**PERDUE FARMS - GEORGETOWN**  
 20621 SAVANAH RD  
 GEORGETOWN, DE  
 US 19947  
 Contact: ROBERT LOCKWOOD  
 Robert.Lockwood@Perdue.com  
 T:  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)