


OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

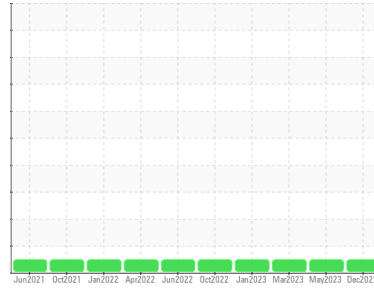

Machine Id
2026854

Component
Diesel Engine

Fluid
PETRO CANADA DURON UHP 5W30 (--- QTS)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			PCA0114136	PCA0095546	PCA0093699
Sample Date	Client Info			09 Dec 2023	09 May 2023	28 Mar 2023
Machine Age	mls	Client Info		227652	185618	188129
Oil Age	mls	Client Info		0	37214	38799
Oil Changed	Client Info			Not Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<1.0	<1.0	<1.0
Water	WC Method	>0.2		NEG	NEG	NEG
Glycol	WC Method			NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	29	28	24
Chromium	ppm	ASTM D5185m	>20	<1	<1	<1
Nickel	ppm	ASTM D5185m	>4	<1	2	2
Titanium	ppm	ASTM D5185m		2	7	7
Silver	ppm	ASTM D5185m	>3	<1	0	0
Aluminum	ppm	ASTM D5185m	>20	4	3	2
Lead	ppm	ASTM D5185m	>40	1	2	<1
Copper	ppm	ASTM D5185m	>330	8	19	10
Tin	ppm	ASTM D5185m	>15	1	1	1
Vanadium	ppm	ASTM D5185m		<1	0	<1
Cadmium	ppm	ASTM D5185m		<1	0	0



ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	2	4
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	64	61	56	57
Manganese	ppm	ASTM D5185m	0	<1	<1	<1
Magnesium	ppm	ASTM D5185m	1160	927	782	922
Calcium	ppm	ASTM D5185m	820	1107	1186	1200
Phosphorus	ppm	ASTM D5185m	1160	938	870	1005
Zinc	ppm	ASTM D5185m	1260	1219	1160	1281
Sulfur	ppm	ASTM D5185m	3000	3265	2832	3806

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	5	4	4
Sodium	ppm	ASTM D5185m		2	0	3
Potassium	ppm	ASTM D5185m	>20	9	7	6

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.5	0.5	0.6
Nitration	Abs/cm	*ASTM D7624	>20	10.7	10.1	10.5
Sulfation	Abs/.1mm	*ASTM D7415	>30	23.3	22.1	21.6

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	19.1	17.6	17.3
Base Number (BN)	mg KOH/g	ASTM D2896	11.0	4.8	5.9	6.8





OIL ANALYSIS REPORT

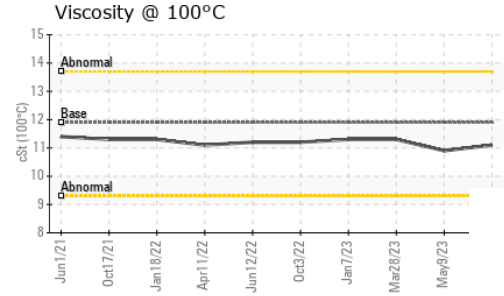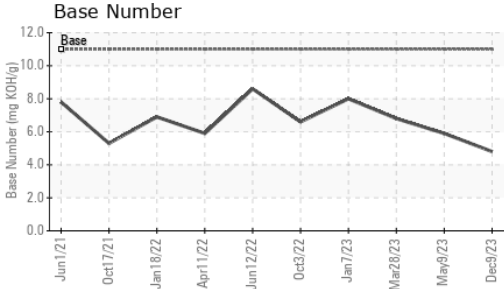

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	11.9	11.1	10.9

GRAPHS

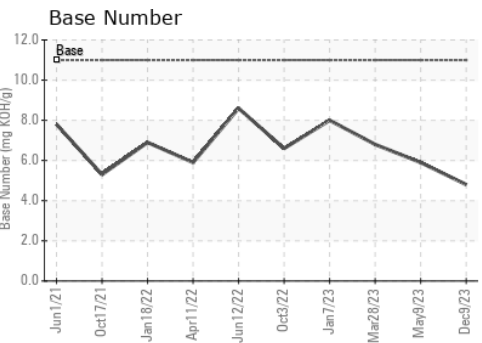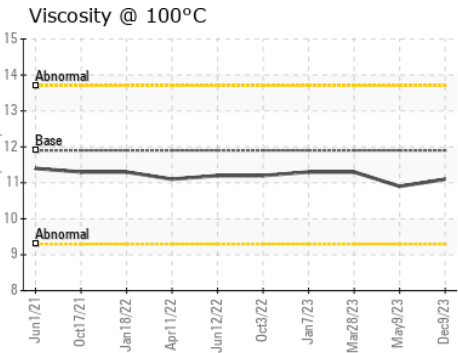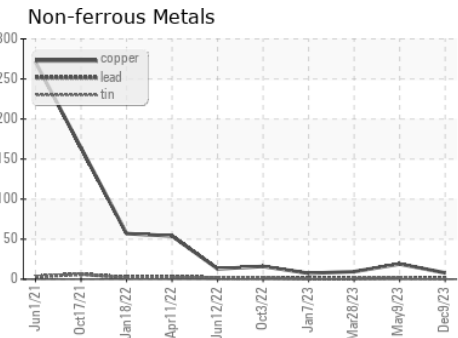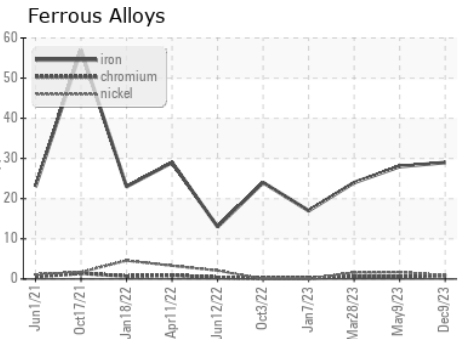

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0114136 **Received** : 15 Dec 2023
Lab Number : 06036667 **Diagnosed** : 18 Dec 2023
Unique Number : 10791896 **Diagnostician** : Wes Davis
Test Package : FLEET

PERDUE FARMS - GEORGETOWN
 20621 SAVANAH RD
 GEORGETOWN, DE
 US 19947
 Contact: ROBERT LOCKWOOD
 Robert.Lockwood@Perdue.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: