


# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

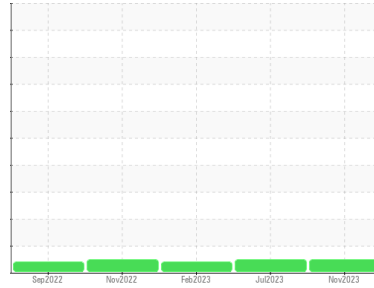

Machine Id  
**2126977**

Component  
**1 Differential**  
Fluid

**PETRO CANADA TRAXON SYNTHETIC 75W90 (--- QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PCA0113258</b>	PCA0102149	PCA0089334
Sample Date	Client Info			<b>26 Nov 2023</b>	22 Jul 2023	17 Feb 2023
Machine Age	mls	Client Info		<b>142597</b>	122121	73630
Oil Age	mls	Client Info		<b>142597</b>	122121	73630
Oil Changed	Client Info			<b>Not Changed</b>	Not Changed	Not Changed
Sample Status				<b>NORMAL</b>	NORMAL	ABNORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>.2	<b>NEG</b>	NEG	NEG


WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>500	<b>273</b>	255	207
Chromium	ppm	ASTM D5185m	>10	<b>4</b>	4	3
Nickel	ppm	ASTM D5185m	>10	<b>4</b>	3	3
Titanium	ppm	ASTM D5185m		<b>1</b>	<1	<1
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>25	<b>2</b>	3	2
Lead	ppm	ASTM D5185m	>25	<b>6</b>	5	6
Copper	ppm	ASTM D5185m	>100	<b>39</b>	33	26
Tin	ppm	ASTM D5185m	>10	<b>2</b>	2	2
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	<1
Cadmium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	328	<b>129</b>	120	135
Barium	ppm	ASTM D5185m	1	<b>0</b>	4	0
Molybdenum	ppm	ASTM D5185m		<b>2</b>	0	1
Manganese	ppm	ASTM D5185m		<b>15</b>	15	12
Magnesium	ppm	ASTM D5185m	1	<b>23</b>	5	6
Calcium	ppm	ASTM D5185m	7	<b>37</b>	50	24
Phosphorus	ppm	ASTM D5185m	1145	<b>1042</b>	1081	1067
Zinc	ppm	ASTM D5185m	3	<b>29</b>	39	33
Sulfur	ppm	ASTM D5185m	17909	<b>26287</b>	28058	22925

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>75	<b>65</b>	50	40
Sodium	ppm	ASTM D5185m		<b>8</b>	9	9
Potassium	ppm	ASTM D5185m	>20	<b>4</b>	2	3

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>LIGHT</b>	NONE	▲ MODER
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>.2	<b>NEG</b>	NEG	NEG
Free Water	scalar	*Visual		<b>NEG</b>	NEG	NEG

# OIL ANALYSIS REPORT

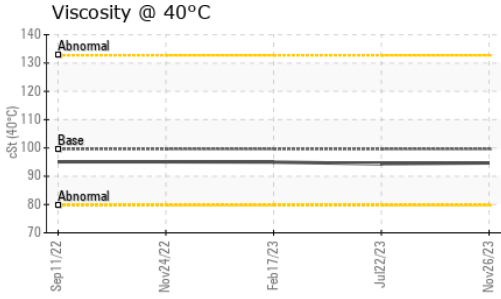




### FLUID PROPERTIES

method	limit/base	current	history1	history2
Visc @ 40°C	cSt ASTM D445	99.6	94.4	95.0

### SAMPLE IMAGES

method	limit/base	current	history1	history2
Color			no image	no image
Bottom			no image	no image

### GRAPHS

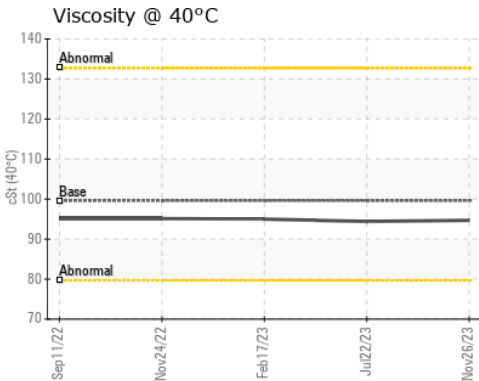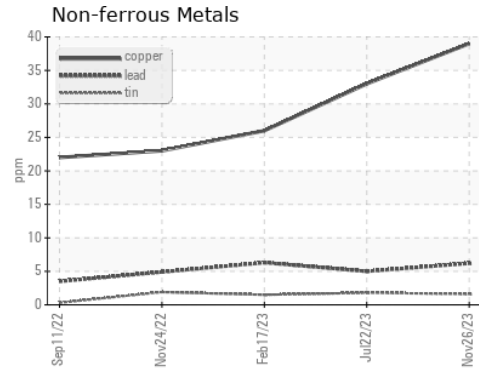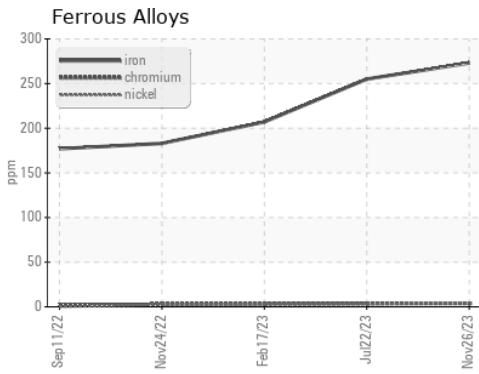

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0113258 **Received** : 15 Dec 2023  
**Lab Number** : 06037108 **Diagnosed** : 20 Dec 2023  
**Unique Number** : 10792337 **Diagnostician** : Jonathan Hester  
**Test Package** : FLEET

**PERDUE FARMS - GEORGETOWN**  
 20621 SAVANAH RD  
 GEORGETOWN, DE  
 US 19947  
 Contact: ROBERT LOCKWOOD  
 Robert.Lockwood@Perdue.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: