


OIL ANALYSIS REPORT

Sample Rating Trend



DIRT

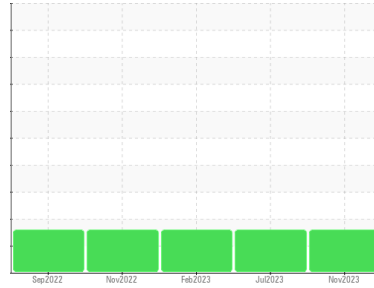

Machine Id
2126977

Component
Transmission (Manual)

Fluid
PETRO CANADA TRAXON SYNTHETIC MTF 75W80 (--- QTS)

DIAGNOSIS

▲ Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

▲ Contamination

Elemental level of silicon (Si) above normal.

Fluid Condition

The condition of the fluid is acceptable for the time in service.

SAMPLE INFORMATION	method	limit/base	current	history1	history2
Sample Number	Client Info		PCA0113259	PCA0102148	PCA0088254
Sample Date	Client Info		26 Nov 2023	22 Jul 2023	17 Feb 2023
Machine Age	mls	Client Info	142597	122121	73630
Oil Age	mls	Client Info	142597	122121	73630
Oil Changed	Client Info		Not Chngd	Not Chngd	Not Chngd
Sample Status			ABNORMAL	ABNORMAL	ABNORMAL

CONTAMINATION	method	limit/base	current	history1	history2
Water	WC Method	>0.1	NEG	NEG	NEG



WEAR METALS	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >200	68	48	45
Chromium	ppm	ASTM D5185m >5	2	1	<1
Nickel	ppm	ASTM D5185m >5	1	<1	<1
Titanium	ppm	ASTM D5185m	<1	0	0
Silver	ppm	ASTM D5185m >7	0	0	0
Aluminum	ppm	ASTM D5185m >25	3	3	2
Lead	ppm	ASTM D5185m >45	0	0	0
Copper	ppm	ASTM D5185m >225	83	54	49
Tin	ppm	ASTM D5185m >10	0	0	0
Vanadium	ppm	ASTM D5185m	<1	0	0
Cadmium	ppm	ASTM D5185m	<1	0	0

ADDITIVES	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	0	0	0
Barium	ppm	ASTM D5185m 0	0	0	0
Molybdenum	ppm	ASTM D5185m	2	0	1
Manganese	ppm	ASTM D5185m	31	22	23
Magnesium	ppm	ASTM D5185m 3	3	2	1
Calcium	ppm	ASTM D5185m 731	1157	875	880
Phosphorus	ppm	ASTM D5185m 628	857	671	666
Zinc	ppm	ASTM D5185m 1	0	6	6
Sulfur	ppm	ASTM D5185m 2556	6957	5479	5514

CONTAMINANTS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >125	▲ 89	▲ 65	▲ 66
Sodium	ppm	ASTM D5185m	2	2	2
Potassium	ppm	ASTM D5185m >20	2	<1	<1

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual NONE	NONE	NONE	NONE
Silt	scalar	*Visual NONE	NONE	NONE	NONE
Debris	scalar	*Visual NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual NONE	NONE	NONE	NONE
Appearance	scalar	*Visual NORML	NORML	NORML	NORML
Odor	scalar	*Visual NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual >0.1	NEG	NEG	NEG
Free Water	scalar	*Visual	NEG	NEG	NEG

OIL ANALYSIS REPORT

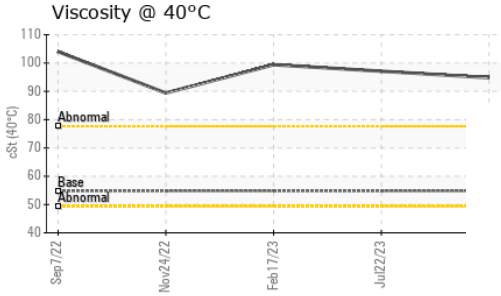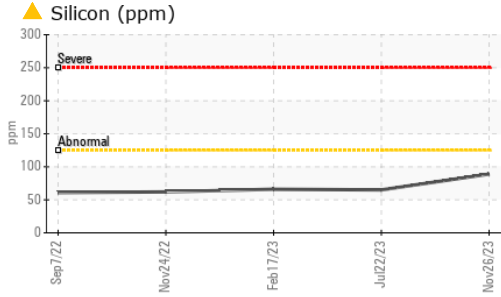




FLUID PROPERTIES

method	limit/base	current	history1	history2	
Visc @ 40°C	cSt ASTM D445	54.8	94.8	97.1	99.4

SAMPLE IMAGES

method	limit/base	current	history1	history2	
Color			no image	no image	no image
Bottom			no image	no image	no image

GRAPHS

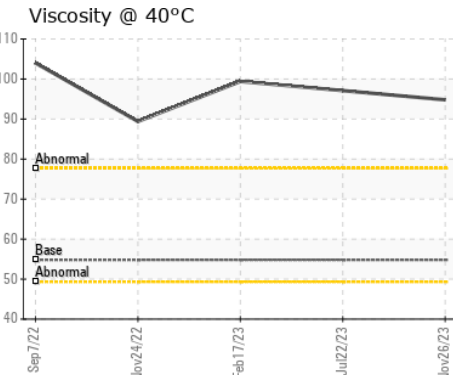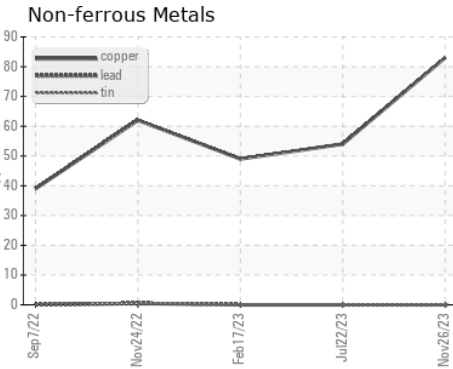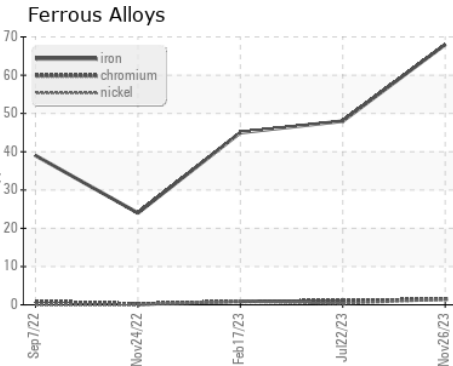

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0113259 **Recieved** : 15 Dec 2023
Lab Number : **06037170** **Diagnosed** : 20 Dec 2023
Unique Number : 10792399 **Diagnostician** : Jonathan Hester
Test Package : FLEET

PERDUE FARMS - GEORGETOWN
 20621 SAVANAH RD
 GEORGETOWN, DE
 US 19947
 Contact: ROBERT LOCKWOOD
 Robert.Lockwood@Perdue.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: