




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

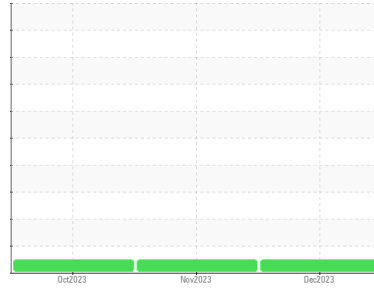

Machine Id
814048

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (--- QTS)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

Metal levels are typical for a new component breaking in.

Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0093591	GFL0093599	GFL0093611
Sample Date	Client Info		15 Dec 2023	22 Nov 2023	10 Oct 2023
Machine Age	hrs	Client Info	647	472	150
Oil Age	hrs	Client Info	647	472	150
Oil Changed	Client Info		Changed	Not Changd	N/A
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	<1.0	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	43	53	36
Chromium	ppm	ASTM D5185m >20	2	3	2
Nickel	ppm	ASTM D5185m >4	<1	<1	1
Titanium	ppm	ASTM D5185m	15	<1	<1
Silver	ppm	ASTM D5185m >3	0	0	<1
Aluminum	ppm	ASTM D5185m >20	40	48	31
Lead	ppm	ASTM D5185m >40	0	0	<1
Copper	ppm	ASTM D5185m >330	14	19	16
Tin	ppm	ASTM D5185m >15	<1	<1	<1
Vanadium	ppm	ASTM D5185m	<1	<1	<1
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	147	199	281
Barium	ppm	ASTM D5185m 0	<1	0	6
Molybdenum	ppm	ASTM D5185m 60	86	113	119
Manganese	ppm	ASTM D5185m 0	4	6	6
Magnesium	ppm	ASTM D5185m 1010	666	714	797
Calcium	ppm	ASTM D5185m 1070	1433	1492	1563
Phosphorus	ppm	ASTM D5185m 1150	739	655	791
Zinc	ppm	ASTM D5185m 1270	928	894	978
Sulfur	ppm	ASTM D5185m 2060	2601	2442	2855

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	19	23	25
Sodium	ppm	ASTM D5185m	3	3	<1
Potassium	ppm	ASTM D5185m >20	108	130	80

INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.4	0.3	0.1
Nitration	Abs/cm	*ASTM D7624 >20	8.9	9.1	6.0
Sulfation	Abs/.1mm	*ASTM D7415 >30	22.5	24.1	21.9

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	18.6	19.7	16.0
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	6.2	7.8	8.6







OIL ANALYSIS REPORT

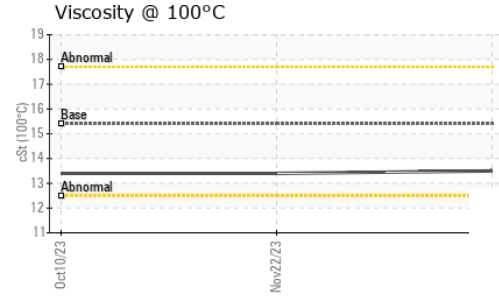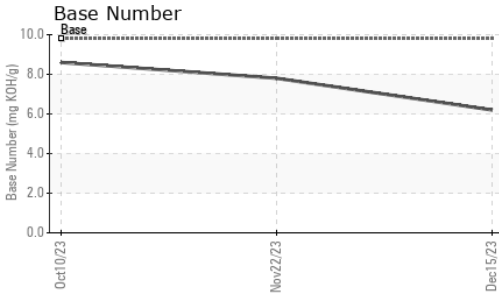

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	13.5	13.4	13.4

GRAPHS

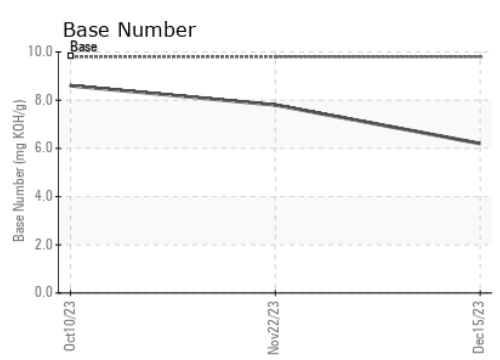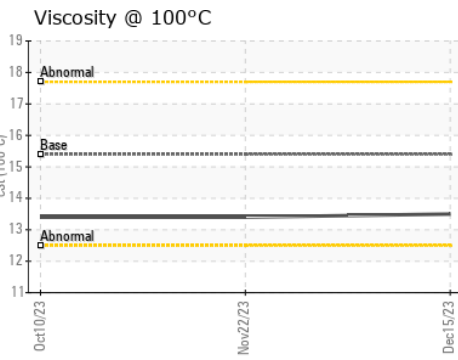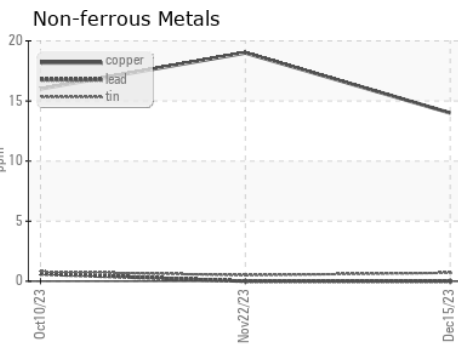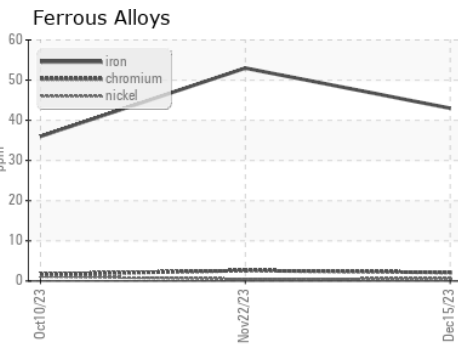

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0093591 **Recieved** : 18 Dec 2023
Lab Number : **06037278** **Diagnosed** : 18 Dec 2023
Unique Number : 10792507 **Diagnostician** : Wes Davis
Test Package : FLEET

GFL Environmental - 891 - Oklahoma City Hauling
 1001 South Rockwell
 Oklahoma City, OK
 US 73128
 Contact: Andy Smith
 andrew.smith@gflenv.com
 T: (405)306-1651
 F:

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)