

OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

LINE 7 [LINE 7] L7 TK-43013 L7 TK-4 Component

Upper Gearbox

{not provided} (--- GAL)

DIAGNOSIS

Recommendation

Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

(-43013						
		May2018		Aug2020 Oct2020	Dec2023	
SAMPLE INFOR	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PCA0102820	PCA0032303	PCA0026302
Sample Date		Client Info		14 Dec 2023	07 Oct 2020	18 Aug 2020
Machine Age	hrs	Client Info		0	0	0
Dil Age	hrs	Client Info		3000	0	0
Dil Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	ATTENTION
CONTAMINAT	ION	method	limit/base	current	history1	history2
Water		WC Method	>0.2	NEG	NEG	NEG
WEAR METAL	.S	method	limit/base	current	history1	history2
PQ		ASTM D8184		12	14	17
ron	ppm	ASTM D5185m	>200	1	1	0
Chromium	ppm	ASTM D5185m	>15	<1	0	0
Nickel	ppm	ASTM D5185m	>15	0	0	<1
Fitanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>25	1	2	0
_ead	ppm	ASTM D5185m	>100	0	0	0
Copper	ppm	ASTM D5185m	>200	0	<1	0
Tin	ppm	ASTM D5185m	>25	0	<1	0
Antimony	ppm	ASTM D5185m	>5		0	0
/anadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	<1	<1
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	0	0
/agnesium	ppm	ASTM D5185m		0	0	0
Calcium	ppm	ASTM D5185m		0	28	0
Phosphorus	ppm	ASTM D5185m		534	521	501
Zinc	ppm	ASTM D5185m		0	12	2
Sulfur	ppm	ASTM D5185m		996	724	730
CONTAMINAN	ITS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	3	5	2
	ppm	ASTM D5185m		0	<1	0
Sodium	0.0.1					
Sodium Potassium	ppm	ASTM D5185m	>20	1	0	0
	ppm		>20 limit/base	1 current	0 history1	0 history2




OIL ANALYSIS REPORT

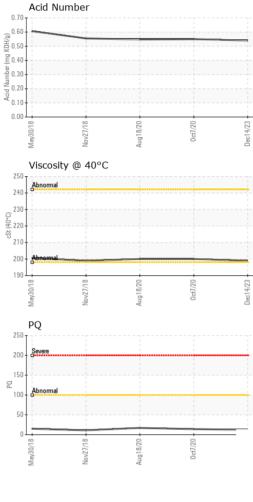

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	VLITE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPE	RTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445		199	200	2 00
SAMPLE IMAG	iES	method	limit/base	current	history1	history2
Color				·		
Bottom						



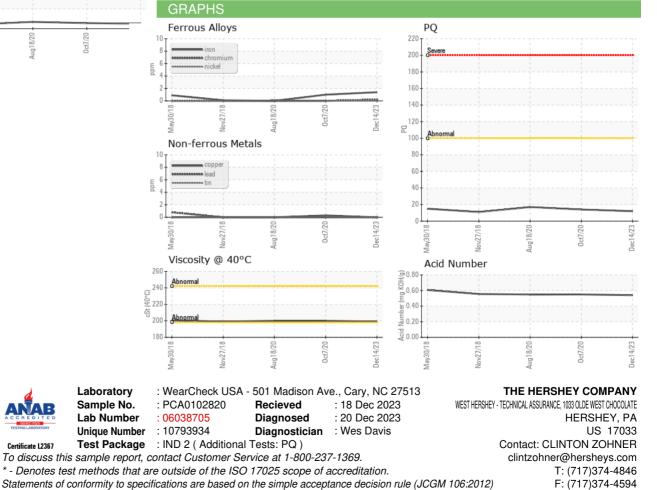

Contact/Location: CLINTON ZOHNER - HERHER