


# OIL ANALYSIS REPORT

## Sample Rating Trend



**NORMAL**

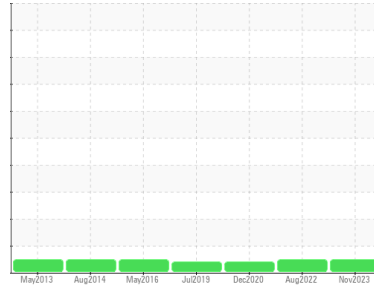

Area  
**MIXING**  
 Machine Id  
**[MIXING] MIXER 26 MIXER 26**  
 Component  
**Gearbox**  
 Fluid  
**PETRO CANADA PURITY FG EP GEAR OIL 220 (--- GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.  
 NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

### SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>PCA0106472</b>	PCA0069170	PCA0030075
Sample Date	Client Info	<b>14 Nov 2023</b>	30 Aug 2022	26 Dec 2020
Machine Age	hrs	Client Info	<b>0</b>	0
Oil Age	hrs	Client Info	<b>0</b>	0
Oil Changed	Client Info	<b>N/A</b>	N/A	N/A
Sample Status		<b>NORMAL</b>	NORMAL	ATTENTION

### CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG

### WEAR METALS

method	limit/base	current	history1	history2
PQ	ASTM D8184	<b>16</b>	11	17
Iron	ppm ASTM D5185m >200	<b>&lt;1</b>	0	<1
Chromium	ppm ASTM D5185m >15	<b>&lt;1</b>	0	0
Nickel	ppm ASTM D5185m >15	<b>0</b>	0	0
Titanium	ppm ASTM D5185m	<b>&lt;1</b>	0	0
Silver	ppm ASTM D5185m	<b>0</b>	0	0
Aluminum	ppm ASTM D5185m >25	<b>1</b>	0	0
Lead	ppm ASTM D5185m >100	<b>0</b>	0	<1
Copper	ppm ASTM D5185m >200	<b>1</b>	<1	<1
Tin	ppm ASTM D5185m >25	<b>0</b>	0	0
Antimony	ppm ASTM D5185m >5	<b>---</b>	---	0
Vanadium	ppm ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm ASTM D5185m	<b>0</b>	0	0

### ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m	<b>0</b>	0	0
Barium	ppm ASTM D5185m	<b>0</b>	0	0
Molybdenum	ppm ASTM D5185m	<b>&lt;1</b>	0	0
Manganese	ppm ASTM D5185m	<b>0</b>	0	0
Magnesium	ppm ASTM D5185m	<b>0</b>	0	0
Calcium	ppm ASTM D5185m	<b>0</b>	0	1
Phosphorus	ppm ASTM D5185m	<b>395</b>	558	477
Zinc	ppm ASTM D5185m	<b>0</b>	220	25
Sulfur	ppm ASTM D5185m	<b>1155</b>	572	457




### CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >50	<b>3</b>	2	3
Sodium	ppm ASTM D5185m	<b>0</b>	0	0
Potassium	ppm ASTM D5185m >20	<b>&lt;1</b>	0	0

### FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g ASTM D8045 0.51	<b>0.55</b>	0.39	0.257


# OIL ANALYSIS REPORT

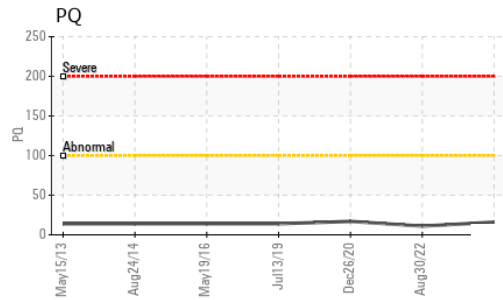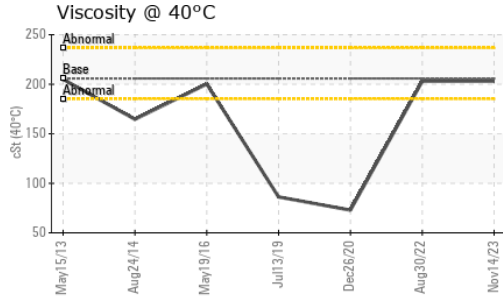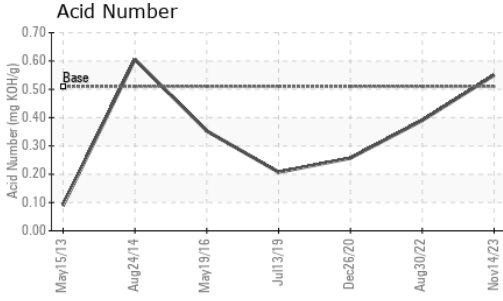






PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	<b>LIGHT</b>	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG
Free Water	scalar	*Visual		<b>NEG</b>	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	205.8	<b>203</b>	203 ▲ 72.9

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

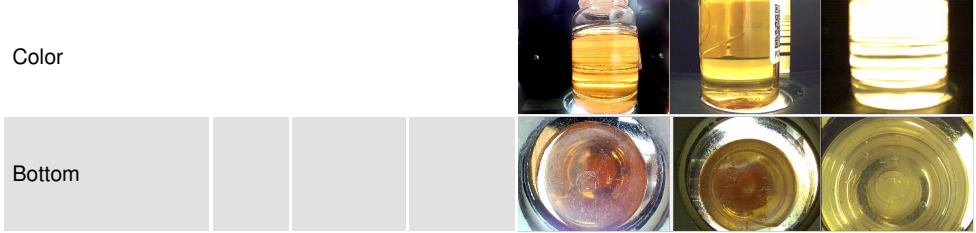

## GRAPHS

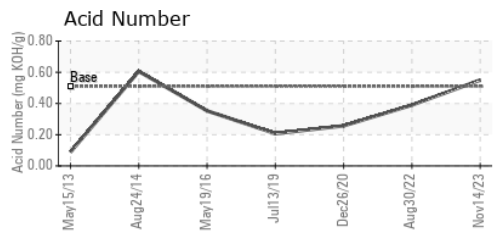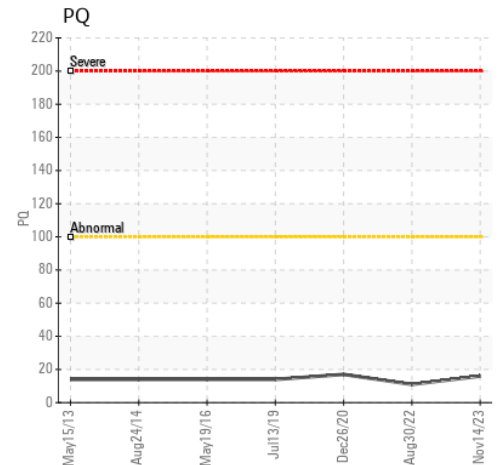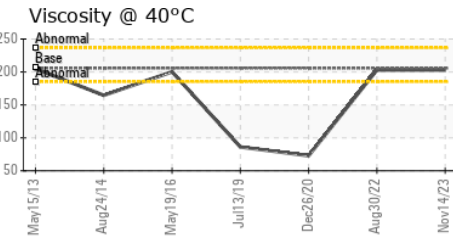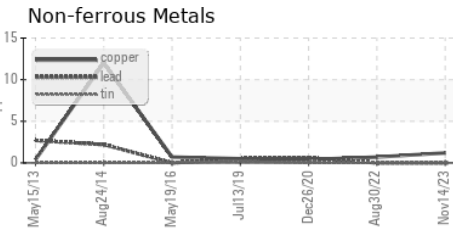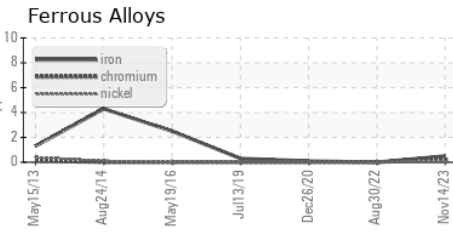

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0106472 **Received** : 18 Dec 2023  
**Lab Number** : 06038711 **Diagnosed** : 20 Dec 2023  
**Unique Number** : 10793940 **Diagnostician** : Wes Davis  
**Test Package** : IND 2 ( Additional Tests: PQ )

**THE HERSHEY COMPANY**  
 WEST HERSHEY - TECHNICAL ASSURANCE, 1033 OLDE WEST CHOCOLATE  
 HERSHEY, PA  
 US 17033  
 Contact: CLINTON ZOHNER  
 clintzohner@hersheys.com  
 T: (717)374-4846  
 F: (717)374-4594

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)