




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Area  
**MONTGOMERY**  
 Machine Id  
**MACK 420049**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- LTR)**

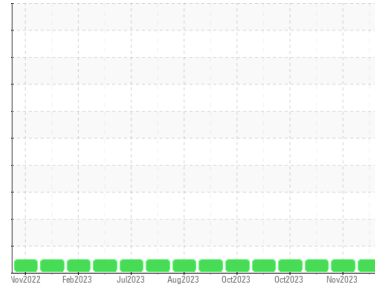

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0091312</b>	GFL0091290	GFL0087973
Sample Date	Client Info		<b>14 Dec 2023</b>	24 Nov 2023	10 Nov 2023
Machine Age	hrs	Client Info	<b>8200</b>	8070	7966
Oil Age	hrs	Client Info	<b>338</b>	208	104
Oil Changed	Client Info		<b>Not Chngd</b>	Not Chngd	Not Chngd
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >120	<b>2</b>	5	3
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m >5	<b>0</b>	<1	<1
Titanium	ppm	ASTM D5185m >2	<b>0</b>	<1	<1
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	2
Lead	ppm	ASTM D5185m >40	<b>1</b>	<1	<1
Copper	ppm	ASTM D5185m >330	<b>&lt;1</b>	1	<1
Tin	ppm	ASTM D5185m >15	<b>0</b>	<1	<1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	<1
Cadmium	ppm	ASTM D5185m	<b>0</b>	<1	<1

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>4</b>	3	3
Barium	ppm	ASTM D5185m 0	<b>0</b>	<1	<1
Molybdenum	ppm	ASTM D5185m 60	<b>60</b>	63	64
Manganese	ppm	ASTM D5185m 0	<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185m 1010	<b>941</b>	954	951
Calcium	ppm	ASTM D5185m 1070	<b>1006</b>	1083	1107
Phosphorus	ppm	ASTM D5185m 1150	<b>910</b>	983	1063
Zinc	ppm	ASTM D5185m 1270	<b>1212</b>	1185	1241
Sulfur	ppm	ASTM D5185m 2060	<b>3068</b>	3382	3063

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>5</b>	5	4
Sodium	ppm	ASTM D5185m	<b>&lt;1</b>	2	0
Potassium	ppm	ASTM D5185m >20	<b>&lt;1</b>	3	2

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >4	<b>0.2</b>	0.2	0.1
Nitration	Abs/cm	*ASTM D7624 >20	<b>5.6</b>	6.1	5.4
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>17.8</b>	17.9	17.9

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>13.5</b>	14.1	13.6
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>8.7</b>	8.3	8.7







# OIL ANALYSIS REPORT

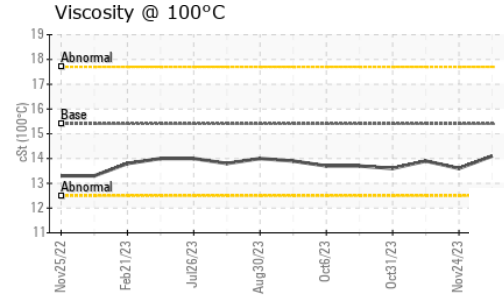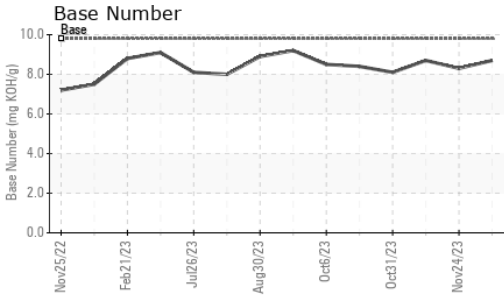

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>14.1</b>	13.6	13.9

## GRAPHS

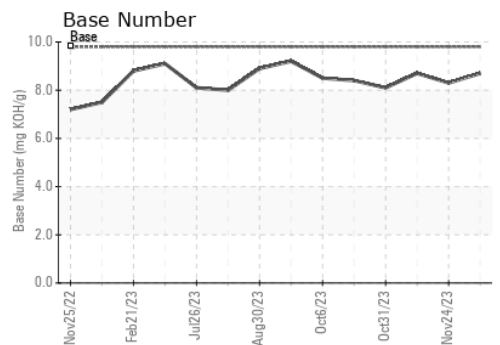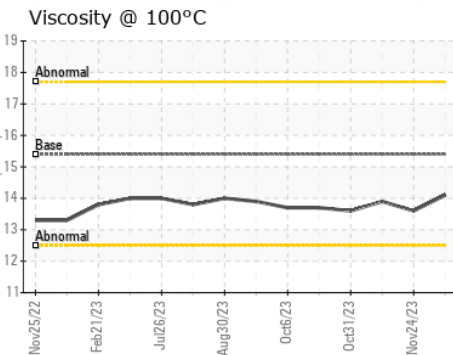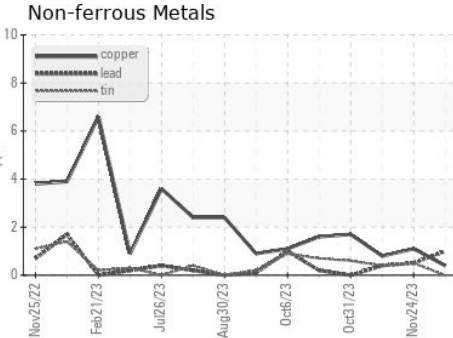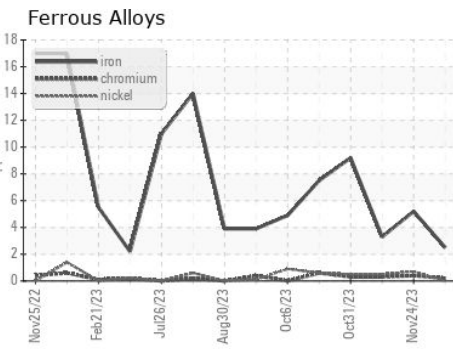

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0091312 **Received** : 19 Dec 2023  
**Lab Number** : **06039979** **Diagnosed** : 20 Dec 2023  
**Unique Number** : 10795208 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 955 - Montgomery**  
 1121 Wilbanks St  
 Montgomery, AL  
 US 36108  
 Contact: LISA REEVES

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: