




# OIL ANALYSIS REPORT

Sample Rating Trend

DIRT



Machine Id  
**934021**  
 Component  
**Natural Gas Engine**  
 Fluid  
**PETRO CANADA DURON GEO LD 15W40 (--- GAL)**

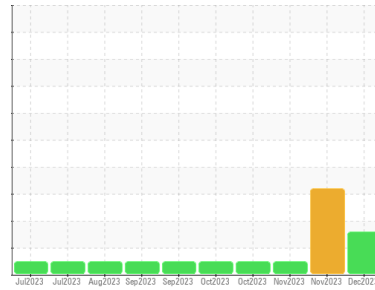

## DIAGNOSIS

### Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

Elemental level of silicon (Si) above normal indicating ingress of seal material.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0099917</b>	GFL0099899	GFL0099936
Sample Date	Client Info	<b>15 Dec 2023</b>	22 Nov 2023	17 Nov 2023
Machine Age	hrs	<b>1344</b>	11836	1146
Oil Age	hrs	<b>0</b>	1200	0
Oil Changed	Client Info	<b>Not Changed</b>	Changed	Not Changed
Sample Status		<b>ABNORMAL</b>	ABNORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.1	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >50	<b>48</b>	▲ 47	7
Chromium	ppm ASTM D5185m >5	<b>&lt;1</b>	1	<1
Nickel	ppm ASTM D5185m >4	<b>&lt;1</b>	2	<1
Titanium	ppm ASTM D5185m >5	<b>0</b>	0	0
Silver	ppm ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm ASTM D5185m >25	<b>4</b>	▲ 12	2
Lead	ppm ASTM D5185m >40	<b>&lt;1</b>	3	3
Copper	ppm ASTM D5185m >150	<b>14</b>	16	<1
Tin	ppm ASTM D5185m >4	<b>&lt;1</b>	2	<1
Vanadium	ppm ASTM D5185m	<b>0</b>	<1	0
Cadmium	ppm ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 50	<b>10</b>	10	33
Barium	ppm ASTM D5185m 5	<b>&lt;1</b>	2	0
Molybdenum	ppm ASTM D5185m 50	<b>55</b>	57	53
Manganese	ppm ASTM D5185m 0	<b>12</b>	10	<1
Magnesium	ppm ASTM D5185m 560	<b>702</b>	795	595
Calcium	ppm ASTM D5185m 1510	<b>1296</b>	1516	1566
Phosphorus	ppm ASTM D5185m 780	<b>659</b>	850	816
Zinc	ppm ASTM D5185m 870	<b>938</b>	1023	1008
Sulfur	ppm ASTM D5185m 2040	<b>2123</b>	2275	2495

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	▲ <b>29</b>	▲ 25	4
Sodium	ppm ASTM D5185m	<b>2</b>	7	1
Potassium	ppm ASTM D5185m >20	<b>9</b>	10	0

## INFRA-RED


method	limit/base	current	history1	history2
Soot %	% *ASTM D7844	<b>0.1</b>	0	0
Nitration	Abs/cm *ASTM D7624 >20	<b>12.1</b>	12.8	9.0
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>23.0</b>	26.3	20.6

## FLUID DEGRADATION


method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>20.3</b>	24.3	17.1
Base Number (BN)	mg KOH/g ASTM D2896 10.2	<b>3.8</b>	3.9	6.6




# OIL ANALYSIS REPORT

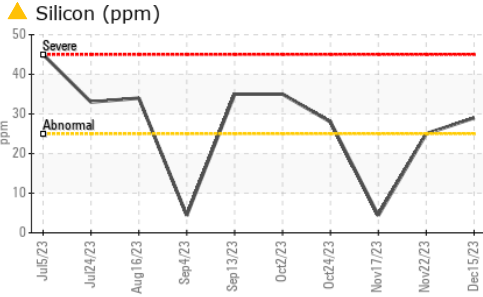





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

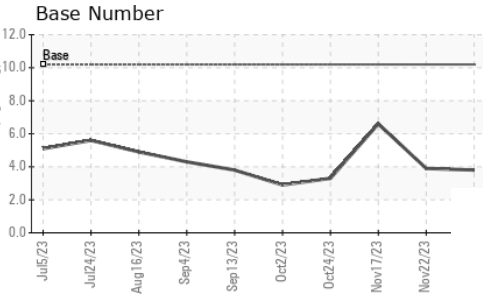

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.1	14.3	14.7

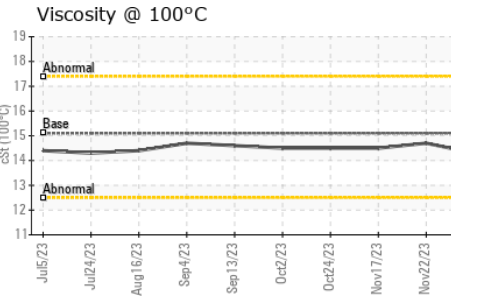

## GRAPHS

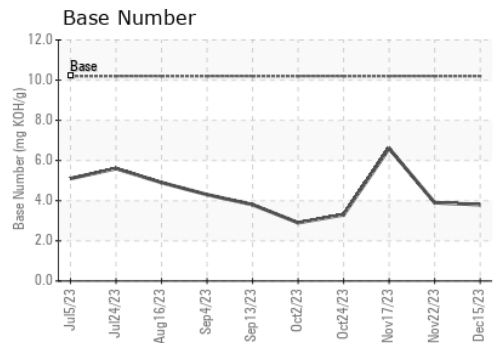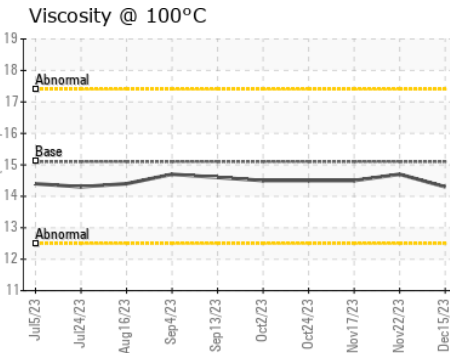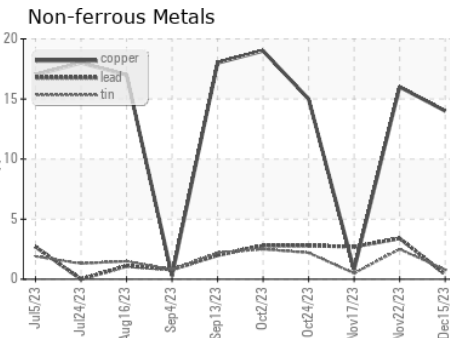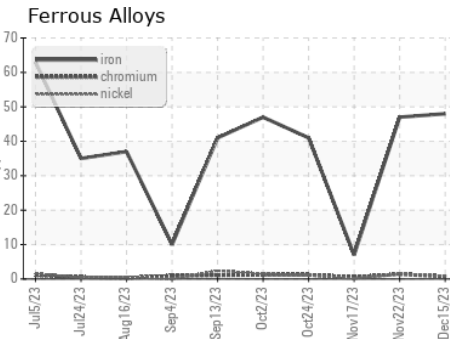

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0099917 **Received** : 20 Dec 2023  
**Lab Number** : 06040201 **Diagnosed** : 21 Dec 2023  
**Unique Number** : 10795430 **Diagnostician** : Sean Felton  
**Test Package** : FLEET ( Additional Tests: FT-IR(Diff) )

**GFL Environmental - 836 - Kansas City Hauling**  
 7801 East Truman Road  
 Kansas City, MO  
 US 64126  
 Contact: Robert Hart  
 rhart@gflenv.com  
 T: (580)461-1509  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)