

Machine Id  
**Blue Bird 4555**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 10W30 (--- GAL)**

**DIAGNOSIS**

**Recommendation**

Resample at the next service interval to monitor.

**Wear**

All component wear rates are normal.

**Contamination**

There is no indication of any contamination in the oil.

**Fluid Condition**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

**SAMPLE INFORMATION**

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0091698</b>	PCA0045595	PCA0045381
Sample Date	Client Info		<b>07 Dec 2023</b>	23 Jul 2022	18 Jan 2022
Machine Age	mls	Client Info	<b>56748</b>	43974	37859
Oil Age	mls	Client Info	<b>12774</b>	6115	6801
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

**CONTAMINATION**

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

**WEAR METALS**

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >90	<b>55</b>	26	36
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m >2	<b>0</b>	0	1
Titanium	ppm	ASTM D5185m >2	<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>2</b>	4	6
Lead	ppm	ASTM D5185m >40	<b>0</b>	0	<1
Copper	ppm	ASTM D5185m >330	<b>21</b>	4	9
Tin	ppm	ASTM D5185m >15	<b>0</b>	<1	<1
Antimony	ppm	ASTM D5185m	<b>---</b>	---	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

**ADDITIVES**

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 2	<b>1</b>	2	4
Barium	ppm	ASTM D5185m 0	<b>0</b>	2	0
Molybdenum	ppm	ASTM D5185m 50	<b>62</b>	58	58
Manganese	ppm	ASTM D5185m 0	<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185m 950	<b>924</b>	889	952
Calcium	ppm	ASTM D5185m 1050	<b>1025</b>	1026	1087
Phosphorus	ppm	ASTM D5185m 995	<b>798</b>	986	981
Zinc	ppm	ASTM D5185m 1180	<b>1184</b>	1207	1201
Sulfur	ppm	ASTM D5185m 2600	<b>2394</b>	3007	2591

**CONTAMINANTS**

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>5</b>	4	5
Sodium	ppm	ASTM D5185m	<b>0</b>	2	2
Potassium	ppm	ASTM D5185m >20	<b>6</b>	6	10



**INFRA-RED**

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >6	<b>0.8</b>	0.4	0.4
Nitration	Abs/cm	*ASTM D7624 >20	<b>12.4</b>	9.4	9.5
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>23.9</b>	20.3	20.6

**FLUID DEGRADATION**

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>22.7</b>	16.5	17.6
Base Number (BN)	mg KOH/g	ASTM D2896	<b>5.9</b>	9.2	8.5





# OIL ANALYSIS REPORT

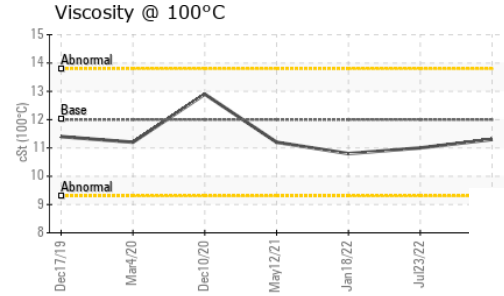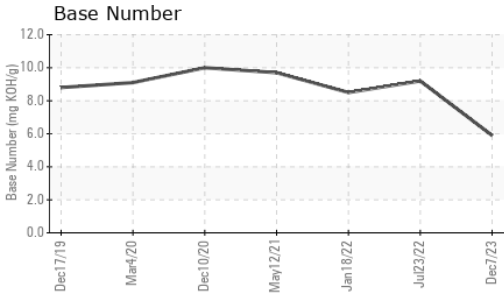

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	12.00	<b>11.3</b>	11.0	10.8

## GRAPHS

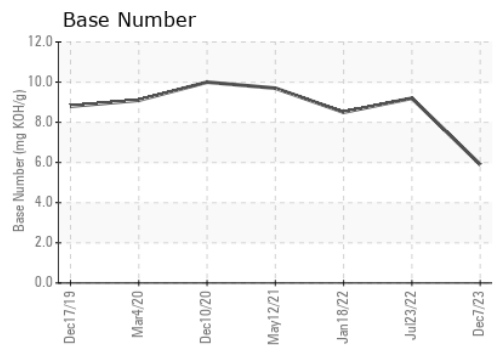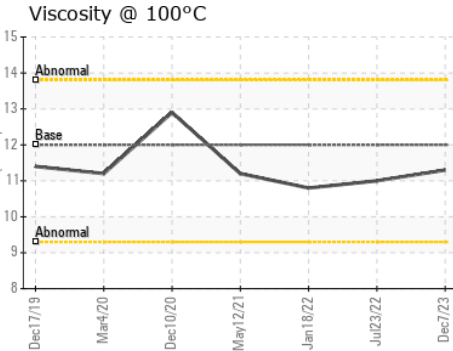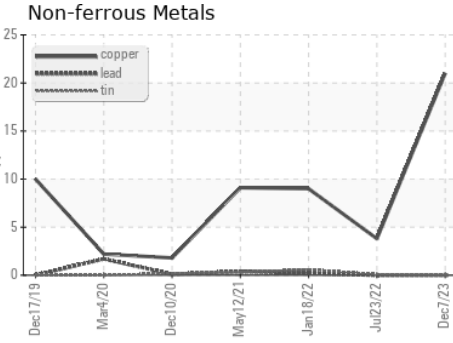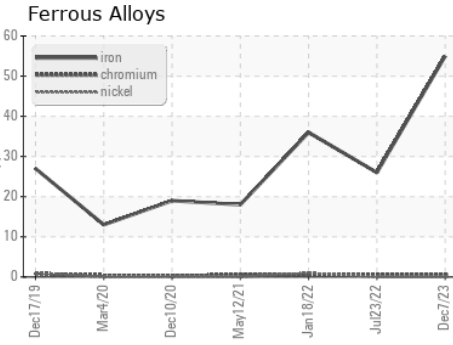

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0091698 **Received** : 20 Dec 2023  
**Lab Number** : **06040242** **Diagnosed** : 21 Dec 2023  
**Unique Number** : 10795471 **Diagnostician** : Sean Felton  
**Test Package** : FLEET ( Additional Tests: FT-IR(Diff) )

**ICSB370 - Alton**  
 4525 North Alby Road  
 Godfrey, IL  
 US 62035  
 Contact: Chad Ingold  
 c.ingold@illinois-central.com  
 T: (618)466-5400  
 F:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)