


# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

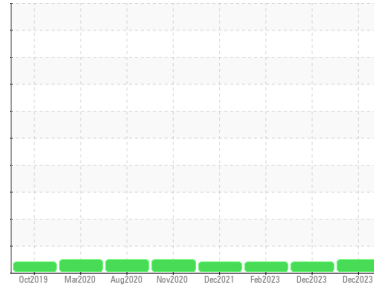

Machine Id  
**Chevrolet 4363**  
 Component  
**Gasoline Engine**  
 Fluid  
**PETRO CANADA DURON SHP 10W30 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0091568</b>	PCA0091671	PCA0071433
Sample Date	Client Info		<b>08 Dec 2023</b>	07 Dec 2023	16 Feb 2023
Machine Age	mls	Client Info	<b>77672</b>	70200	58519
Oil Age	mls	Client Info	<b>19153</b>	11681	7907
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	ATTENTION	ABNORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>4.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >150	<b>14</b>	24	21
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	1	<1
Nickel	ppm	ASTM D5185m >5	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185m	<b>0</b>	<1	<1
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >40	<b>2</b>	5	4
Lead	ppm	ASTM D5185m >50	<b>0</b>	1	<1
Copper	ppm	ASTM D5185m >155	<b>29</b>	42	43
Tin	ppm	ASTM D5185m >10	<b>0</b>	0	<1
Vanadium	ppm	ASTM D5185m	<b>0</b>	<1	<1
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 2	<b>&lt;1</b>	<1	4
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 50	<b>57</b>	56	45
Manganese	ppm	ASTM D5185m 0	<b>0</b>	<1	2
Magnesium	ppm	ASTM D5185m 950	<b>876</b>	857	798
Calcium	ppm	ASTM D5185m 1050	<b>951</b>	891	971
Phosphorus	ppm	ASTM D5185m 995	<b>718</b>	814	759
Zinc	ppm	ASTM D5185m 1180	<b>1089</b>	1085	1068
Sulfur	ppm	ASTM D5185m 2600	<b>2365</b>	2359	2607

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >30	<b>8</b>	10	8
Sodium	ppm	ASTM D5185m >400	<b>0</b>	4	4
Potassium	ppm	ASTM D5185m >20	<b>1</b>	<1	2



## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	<b>0.1</b>	0.1	0.1
Nitration	Abs/cm	*ASTM D7624 >20	<b>15.6</b>	20.1	16.2
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>27.6</b>	34.1	42.8

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>29.8</b>	40.2	34.9
Base Number (BN)	mg KOH/g	ASTM D2896	<b>5.8</b>	5.1	9.0





# OIL ANALYSIS REPORT

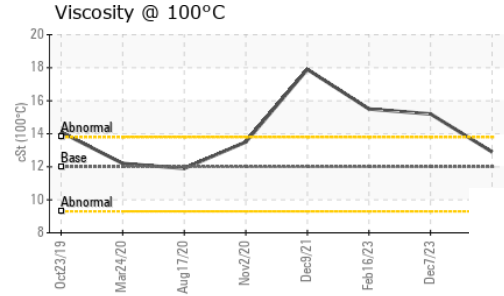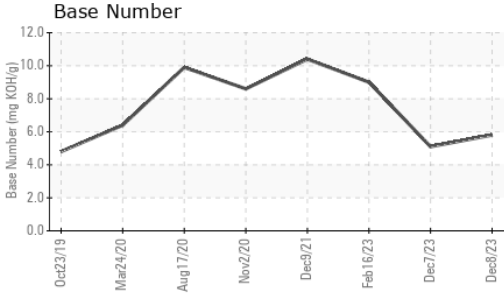

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	<b>12.9</b>	▲ 15.2 ▲ 15.5

## GRAPHS

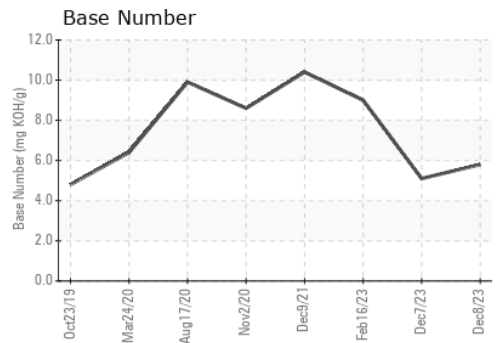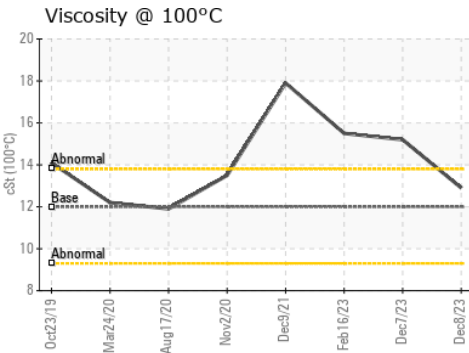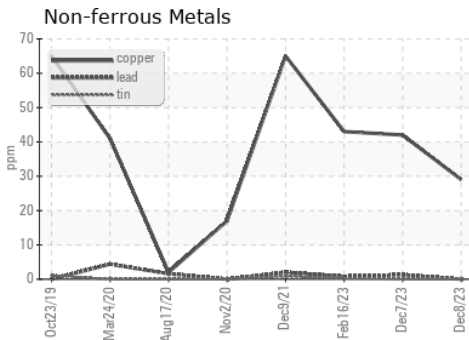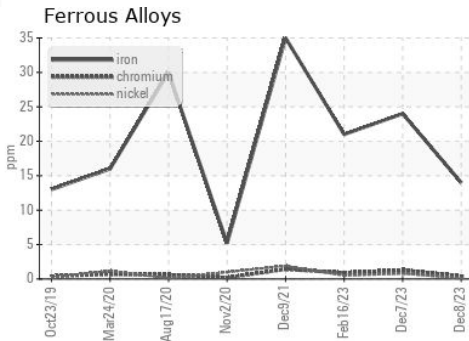

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0091568 **Received** : 20 Dec 2023  
**Lab Number** : **06040272** **Diagnosed** : 21 Dec 2023  
**Unique Number** : 10795501 **Diagnostician** : Sean Felton  
**Test Package** : FLEET ( Additional Tests: FT-IR(Diff) )

**ICSB370 - Alton**  
 4525 North Alby Road  
 Godfrey, IL  
 US 62035  
 Contact: Chad Ingold  
 c.ingold@illinois-central.com  
 T: (618)466-5400  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)