


# OIL ANALYSIS REPORT

## Sample Rating Trend



**NORMAL**

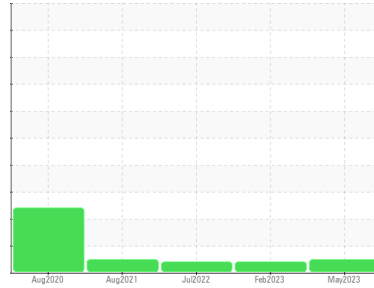

Machine Id  
**5041**  
 Component  
**Gasoline Engine**  
 Fluid  
**PETRO CANADA DURON SHP 10W30 (--- GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PCA0091670</b>	PCA0045401	PCA0045402
Sample Date	Client Info			<b>09 May 2023</b>	16 Feb 2023	24 Jul 2022
Machine Age	mls Client Info			<b>41142</b>	31835	20299
Oil Age	mls Client Info			<b>9307</b>	11536	9239
Oil Changed	Client Info			<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	ATTENTION	ATTENTION

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>4.0		<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2		<b>NEG</b>	NEG	NEG
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>150	<b>16</b>	24	31
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	1
Nickel	ppm	ASTM D5185m	>5	<b>&lt;1</b>	<1	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>40	<b>4</b>	5	7
Lead	ppm	ASTM D5185m	>50	<b>1</b>	2	<1
Copper	ppm	ASTM D5185m	>155	<b>45</b>	74	90
Tin	ppm	ASTM D5185m	>10	<b>0</b>	<1	<1
Antimony	ppm	ASTM D5185m		<b>---</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0



ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	<b>&lt;1</b>	1	4
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	2
Molybdenum	ppm	ASTM D5185m	50	<b>60</b>	58	51
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	3	2
Magnesium	ppm	ASTM D5185m	950	<b>926</b>	865	701
Calcium	ppm	ASTM D5185m	1050	<b>1017</b>	1032	913
Phosphorus	ppm	ASTM D5185m	995	<b>858</b>	793	697
Zinc	ppm	ASTM D5185m	1180	<b>1172</b>	1098	961
Sulfur	ppm	ASTM D5185m	2600	<b>2419</b>	2388	2135

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>30	<b>12</b>	13	14
Sodium	ppm	ASTM D5185m	>400	<b>2</b>	5	3
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	1	3

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844		<b>0.1</b>	0.1	0.1
Nitration	Abs/cm	*ASTM D7624	>20	<b>16.2</b>	17.0	18.6
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>27.8</b>	32.7	54.3

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>29.3</b>	35.2	36.1
Base Number (BN)	mg KOH/g	ASTM D2896		<b>5.2</b>	6.4	13.2






# OIL ANALYSIS REPORT

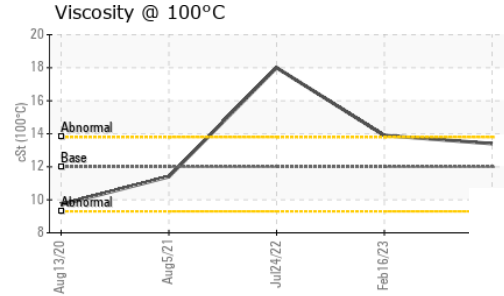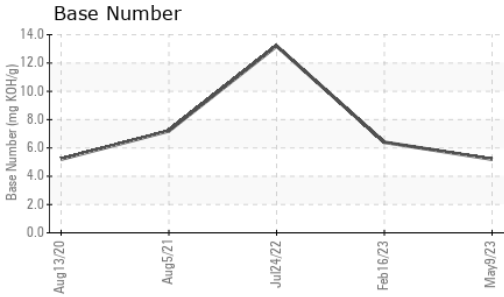

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	<b>13.4</b>	▲ 13.9 ▲ 18.0

## GRAPHS

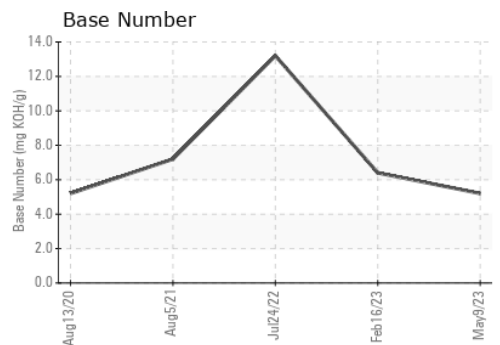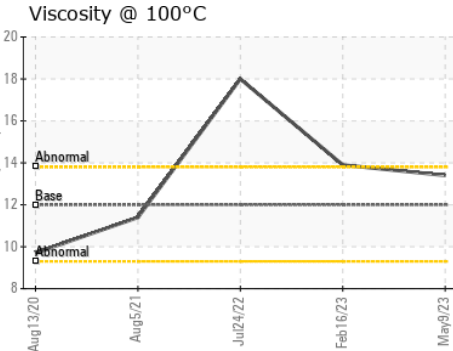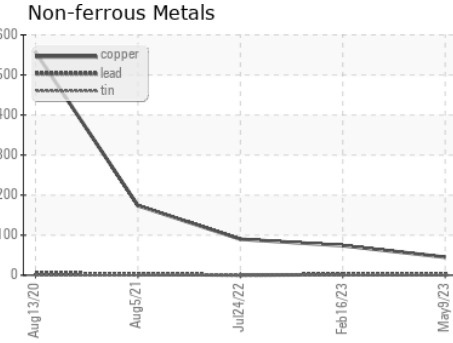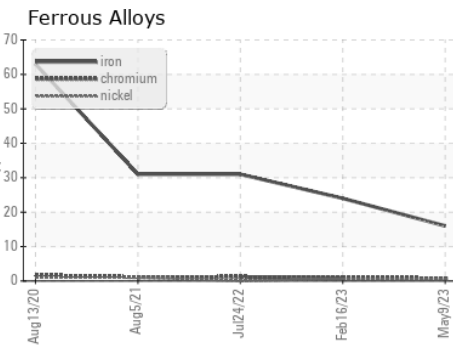

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0091670 **Received** : 20 Dec 2023  
**Lab Number** : **06040305** **Diagnosed** : 21 Dec 2023  
**Unique Number** : 10795534 **Diagnostician** : Angela Borella  
**Test Package** : FLEET ( Additional Tests: FT-IR(Diff) )

**ICSB370 - Alton**  
 4525 North Alby Road  
 Godfrey, IL  
 US 62035  
 Contact: Chad Ingold  
 c.ingold@illinois-central.com  
 T: (618)466-5400  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)