



# OIL ANALYSIS REPORT

Sample Rating Trend


**NORMAL**



Machine Id  
**821028-101309**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

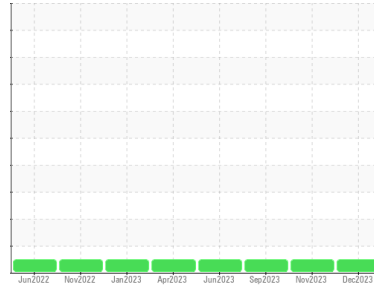

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0101965</b>	GFL0101972	GFL0078384
Sample Date	Client Info	<b>18 Dec 2023</b>	16 Nov 2023	11 Sep 2023
Machine Age	hrs	<b>7992</b>	7774	7301
Oil Age	hrs	<b>218</b>	473	624
Oil Changed	Client Info	<b>Not Changed</b>	Changed	Changed
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	<b>2</b>	12	14
Chromium	ppm ASTM D5185m >20	<b>&lt;1</b>	<1	2
Nickel	ppm ASTM D5185m >4	<b>0</b>	<1	<1
Titanium	ppm ASTM D5185m	<b>&lt;1</b>	<1	<1
Silver	ppm ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm ASTM D5185m >20	<b>1</b>	4	6
Lead	ppm ASTM D5185m >40	<b>&lt;1</b>	0	0
Copper	ppm ASTM D5185m >330	<b>&lt;1</b>	1	1
Tin	ppm ASTM D5185m >15	<b>0</b>	0	<1
Vanadium	ppm ASTM D5185m	<b>&lt;1</b>	0	0
Cadmium	ppm ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>3</b>	<1	4
Barium	ppm ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm ASTM D5185m 60	<b>57</b>	63	67
Manganese	ppm ASTM D5185m 0	<b>0</b>	<1	<1
Magnesium	ppm ASTM D5185m 1010	<b>902</b>	939	965
Calcium	ppm ASTM D5185m 1070	<b>1019</b>	1090	1122
Phosphorus	ppm ASTM D5185m 1150	<b>940</b>	967	1030
Zinc	ppm ASTM D5185m 1270	<b>1154</b>	1223	1261
Sulfur	ppm ASTM D5185m 2060	<b>3001</b>	3119	3339

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>3</b>	6	8
Sodium	ppm ASTM D5185m	<b>1</b>	4	5
Potassium	ppm ASTM D5185m >20	<b>&lt;1</b>	4	5

## INFRA-RED



method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>0.1</b>	0.4	0
Nitration	Abs/cm *ASTM D7624 >20	<b>5.3</b>	8.6	8.8
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>17.5</b>	20.1	22.3

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>13.3</b>	17.1	17.1
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>8.9</b>	7.2	7.0







# OIL ANALYSIS REPORT

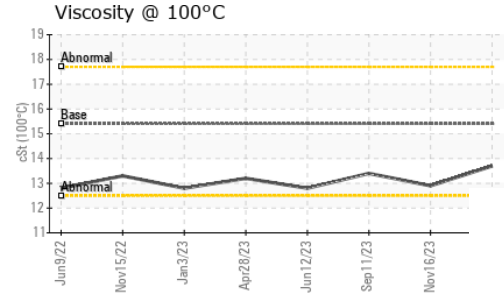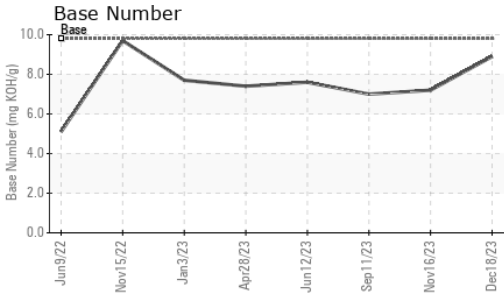

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.7</b>	12.9	13.4

## GRAPHS

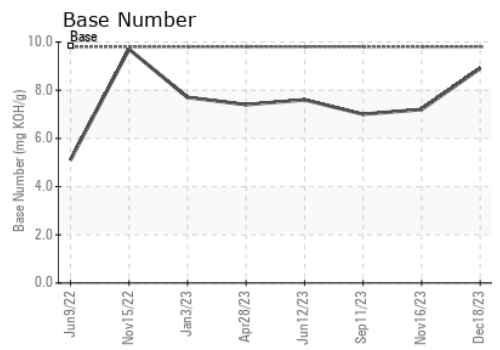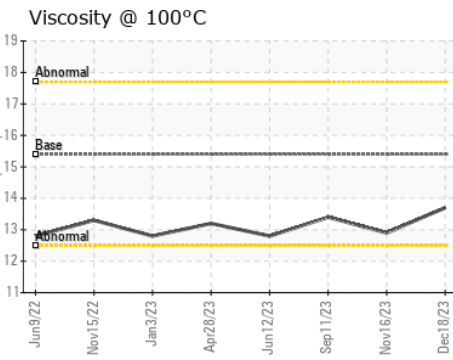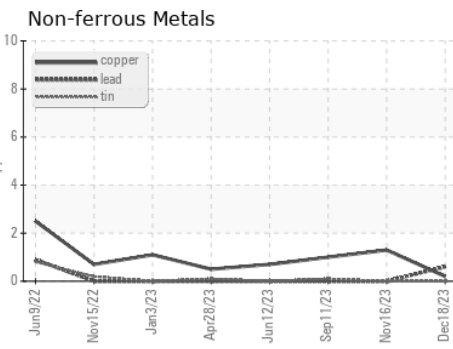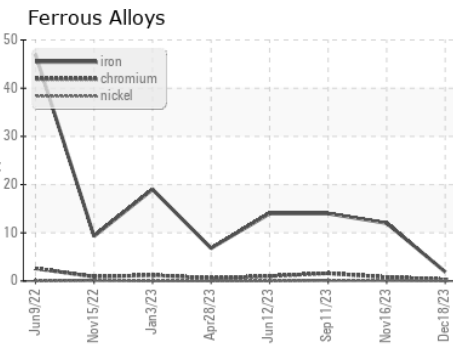

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0101965 **Received** : 20 Dec 2023  
**Lab Number** : **06040373** **Diagnosed** : 21 Dec 2023  
**Unique Number** : 10795602 **Diagnostician** : Sean Felton  
**Test Package** : FLEET ( Additional Tests: FT-IR(Diff) )

**GFL Environmental - 894 - Ada Hauling**  
 1904 North Broadway, Suite D  
 Ada, OK  
 US 74820  
 Contact: Johnny Spurlock  
 jspurlock@gflenv.com  
 T: (405)664-4476  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)