

# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Machine Id  
**003971**  
Component  
**Transmission (Auto)**  
Fluid  
**ATF (PAO) (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PCA0091664</b>	---	---
Sample Date	Client Info			<b>07 Dec 2023</b>	---	---
Machine Age	mls	Client Info		<b>72304</b>	---	---
Oil Age	mls	Client Info		<b>72304</b>	---	---
Oil Changed	Client Info			<b>Oil Added</b>	---	---
Sample Status				<b>NORMAL</b>	---	---

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.1	<b>NEG</b>	---	---


WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>160	<b>68</b>	---	---
Chromium	ppm	ASTM D5185m	>5	<b>&lt;1</b>	---	---
Nickel	ppm	ASTM D5185m	>5	<b>0</b>	---	---
Titanium	ppm	ASTM D5185m		<b>0</b>	---	---
Silver	ppm	ASTM D5185m	>5	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m	>50	<b>10</b>	---	---
Lead	ppm	ASTM D5185m	>50	<b>33</b>	---	---
Copper	ppm	ASTM D5185m	>225	<b>45</b>	---	---
Tin	ppm	ASTM D5185m	>10	<b>&lt;1</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Cadmium	ppm	ASTM D5185m		<b>0</b>	---	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	175	<b>94</b>	---	---
Barium	ppm	ASTM D5185m	5	<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185m	5	<b>0</b>	---	---
Manganese	ppm	ASTM D5185m		<b>4</b>	---	---
Magnesium	ppm	ASTM D5185m	5	<b>0</b>	---	---
Calcium	ppm	ASTM D5185m	125	<b>60</b>	---	---
Phosphorus	ppm	ASTM D5185m	290	<b>195</b>	---	---
Zinc	ppm	ASTM D5185m	10	<b>5</b>	---	---
Sulfur	ppm	ASTM D5185m	400	<b>469</b>	---	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	<b>4</b>	---	---
Sodium	ppm	ASTM D5185m		<b>5</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>1</b>	---	---

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	---	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	---	---
Free Water	scalar	*Visual		<b>NEG</b>	---	---

# OIL ANALYSIS REPORT

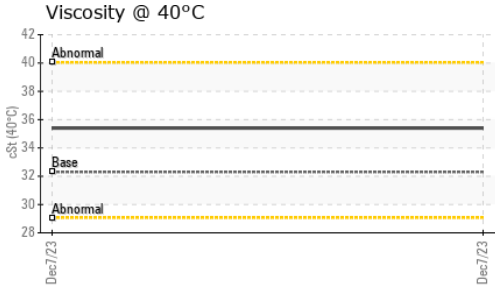




### FLUID PROPERTIES

method	limit/base	current	history1	history2	
Visc @ 40°C	cSt ASTM D445	32.3	<b>35.4</b>	---	---

### SAMPLE IMAGES

method	limit/base	current	history1	history2
Color			no image	no image
Bottom			no image	no image

### GRAPHS

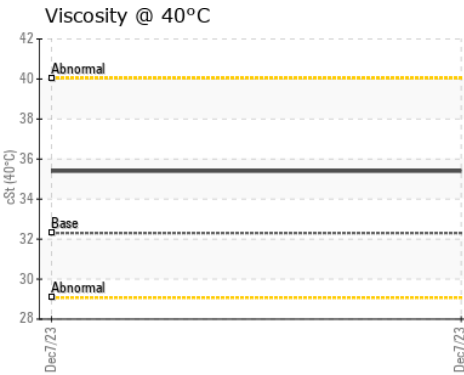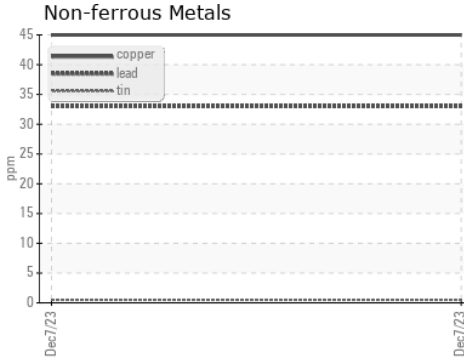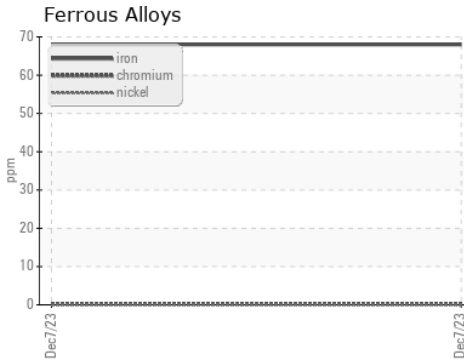

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0091664 **Received** : 20 Dec 2023  
**Lab Number** : **06040878** **Diagnosed** : 22 Dec 2023  
**Unique Number** : 10796107 **Diagnostician** : Don Baldrige  
**Test Package** : FLEET

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**ICSB370 - Alton**  
 4525 North Alby Road  
 Godfrey, IL  
 US 62035

Contact: Chad Ingold  
c.ingold@illinois-central.com

T: (618)466-5400

F: