

# OIL ANALYSIS REPORT

Sample Rating Trend



**WEAR**



Machine Id  
**International 4402**  
 Component  
**Transmission (Auto)**  
 Fluid  
**PETRO CANADA TEF 295 (--- GAL)**

## DIAGNOSIS

### ▲ Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

### ▲ Wear

Clutch and/or bushing/bearing wear is indicated. All other component wear rates are normal.

### Contamination

There is no indication of any contamination in the fluid.

### Fluid Condition

The condition of the fluid is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PCA0091669</b>	---	---
Sample Date	Client Info			<b>07 Dec 2023</b>	---	---
Machine Age	mls	Client Info		<b>118266</b>	---	---
Oil Age	mls	Client Info		<b>118266</b>	---	---
Oil Changed	Client Info			<b>Oil Added</b>	---	---
Sample Status				<b>ABNORMAL</b>	---	---

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.1	<b>NEG</b>	---	---



WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>230	<b>149</b>	---	---
Chromium	ppm	ASTM D5185m	>2	<b>&lt;1</b>	---	---
Nickel	ppm	ASTM D5185m	>5	<b>0</b>	---	---
Titanium	ppm	ASTM D5185m	>2	<b>0</b>	---	---
Silver	ppm	ASTM D5185m	>5	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m	>65	<b>19</b>	---	---
Lead	ppm	ASTM D5185m	>55	<b>▲ 67</b>	---	---
Copper	ppm	ASTM D5185m	>85	<b>▲ 110</b>	---	---
Tin	ppm	ASTM D5185m	>5	<b>2</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Cadmium	ppm	ASTM D5185m		<b>0</b>	---	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	100	<b>146</b>	---	---
Barium	ppm	ASTM D5185m		<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185m		<b>0</b>	---	---
Manganese	ppm	ASTM D5185m		<b>6</b>	---	---
Magnesium	ppm	ASTM D5185m		<b>0</b>	---	---
Calcium	ppm	ASTM D5185m	30	<b>72</b>	---	---
Phosphorus	ppm	ASTM D5185m	220	<b>283</b>	---	---
Zinc	ppm	ASTM D5185m	4	<b>0</b>	---	---
Sulfur	ppm	ASTM D5185m	1060	<b>1352</b>	---	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	<b>7</b>	---	---
Sodium	ppm	ASTM D5185m		<b>7</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	---	---

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	---	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	---	---
Free Water	scalar	*Visual		<b>NEG</b>	---	---




# OIL ANALYSIS REPORT

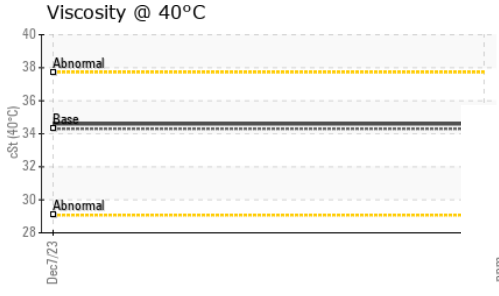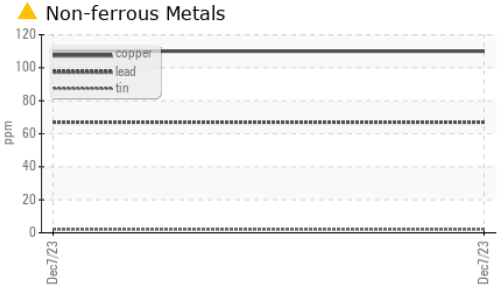

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	34.3	<b>34.6</b>	---	---

SAMPLE IMAGES		method	limit/base	current	history1	history2
Color				no image	no image	no image
Bottom				no image	no image	no image

## GRAPHS

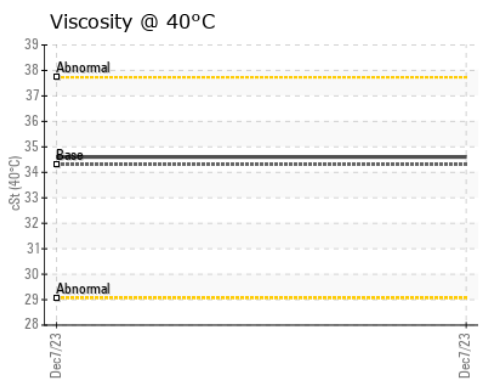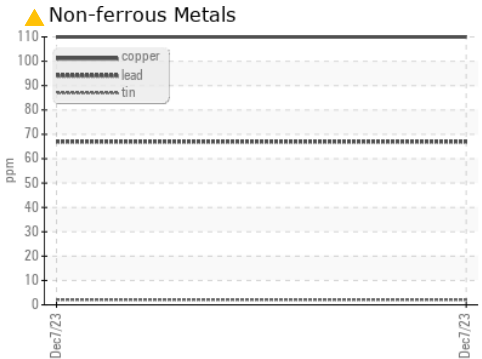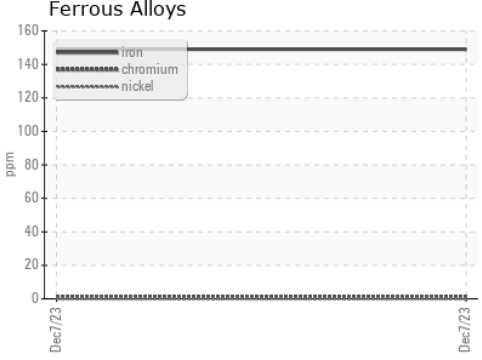

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0091669 **Recieved** : 20 Dec 2023  
**Lab Number** : **06040898** **Diagnosed** : 22 Dec 2023  
**Unique Number** : 10796127 **Diagnostician** : Don Baldrige  
**Test Package** : FLEET

**ICSB370 - Alton**  
 4525 North Alby Road  
 Godfrey, IL  
 US 62035  
 Contact: Chad Ingold  
 c.ingold@illinois-central.com  
 T: (618)466-5400  
 F:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)