




# OIL ANALYSIS REPORT

Sample Rating Trend

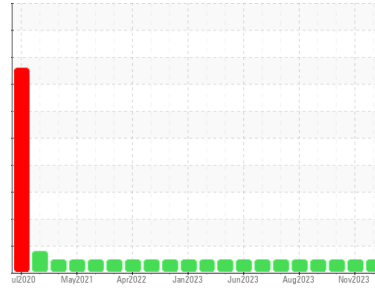

**NORMAL**



Machine Id  
**429061-402470**

Component  
**Diesel Engine**

Fluid  
**CHEVRON DELO 400 MULTIGRADE 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0086412</b>	GFL0086393	GFL0086391
Sample Date	Client Info		<b>19 Dec 2023</b>	19 Nov 2023	23 Oct 2023
Machine Age	hrs	Client Info	<b>8841</b>	8592	8541
Oil Age	hrs	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>N/A</b>	N/A	N/A
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >110	<b>10</b>	19	26
Chromium	ppm	ASTM D5185m >4	<b>&lt;1</b>	2	2
Nickel	ppm	ASTM D5185m >2	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185m	<b>0</b>	<1	<1
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >25	<b>1</b>	4	3
Lead	ppm	ASTM D5185m >45	<b>0</b>	2	2
Copper	ppm	ASTM D5185m >85	<b>&lt;1</b>	9	1
Tin	ppm	ASTM D5185m >4	<b>0</b>	<1	<1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	<1

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>3</b>	36	18
Barium	ppm	ASTM D5185m	<b>0</b>	0	3
Molybdenum	ppm	ASTM D5185m	<b>60</b>	60	74
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	<b>909</b>	782	955
Calcium	ppm	ASTM D5185m	<b>1085</b>	1275	1447
Phosphorus	ppm	ASTM D5185m 1360	<b>1024</b>	899	1282
Zinc	ppm	ASTM D5185m 1480	<b>1217</b>	1225	1449
Sulfur	ppm	ASTM D5185m	<b>3031</b>	2725	4146

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >30	<b>6</b>	10	9
Sodium	ppm	ASTM D5185m	<b>4</b>	4	4
Potassium	ppm	ASTM D5185m >20	<b>1</b>	6	4

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.2</b>	0.4	0.3
Nitration	Abs/cm	*ASTM D7624 >20	<b>7.7</b>	9.1	8.5
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>19.1</b>	22.4	20.4

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>15.0</b>	18.9	16.2
Base Number (BN)	mg KOH/g	ASTM D2896 12.2	<b>7.7</b>	7.6	7.6







# OIL ANALYSIS REPORT

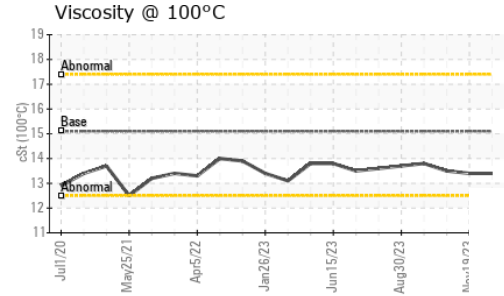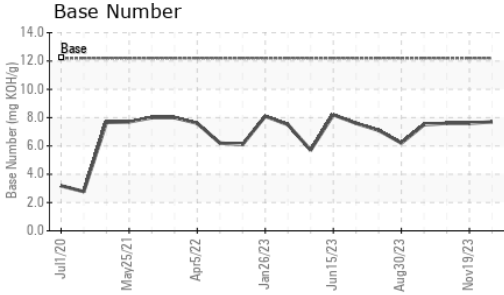

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.1	<b>13.4</b>	13.4	13.5

## GRAPHS

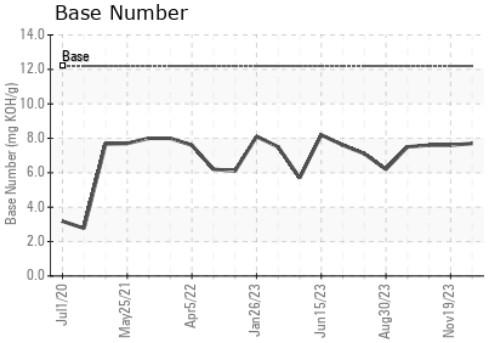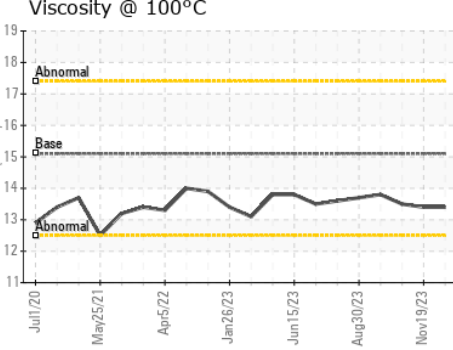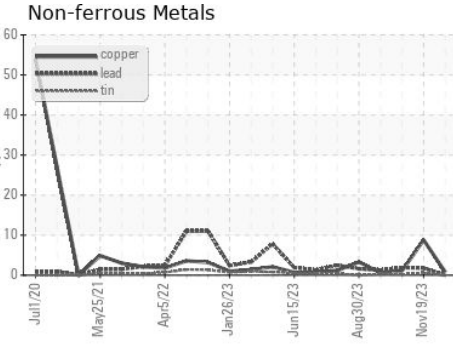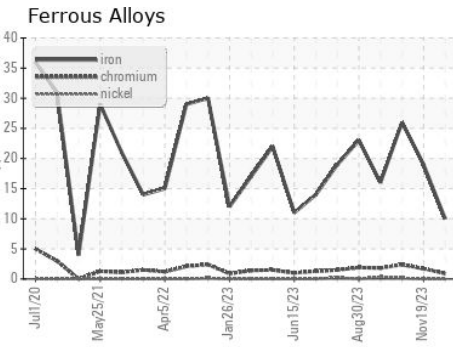

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0086412 **Recieved** : 20 Dec 2023  
**Lab Number** : **06041228** **Diagnosed** : 22 Dec 2023  
**Unique Number** : 10796457 **Diagnostician** : Don Baldrige  
**Test Package** : FLEET

**GFL Environmental - 816 - WCA of South Arkansas**  
 3083 Smackover Hwy  
 El Dorado, AR  
 US 71730  
 Contact: Mike Howell  
 mike.howell@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: