




# OIL ANALYSIS REPORT

Sample Rating Trend

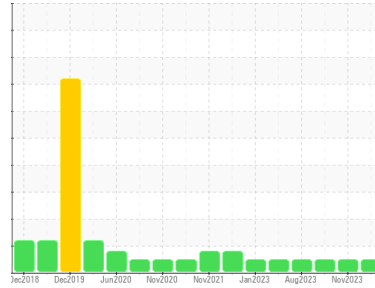

**NORMAL**



Machine Id  
**423035-402282**  
 Component  
**Diesel Engine**  
 Fluid  
**CHEVRON DELO 400 MULTIGRADE 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0086413</b>	GFL0086395	GFL0086380
Sample Date	Client Info		<b>19 Dec 2023</b>	19 Nov 2023	02 Oct 2023
Machine Age	hrs	Client Info	<b>20184</b>	20039	19900
Oil Age	hrs	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>N/A</b>	N/A	N/A
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >120	<b>3</b>	12	11
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	1	1
Nickel	ppm	ASTM D5185m >5	<b>&lt;1</b>	1	2
Titanium	ppm	ASTM D5185m >2	<b>&lt;1</b>	<1	<1
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>3</b>	13	12
Lead	ppm	ASTM D5185m >40	<b>0</b>	<1	<1
Copper	ppm	ASTM D5185m >330	<b>&lt;1</b>	2	1
Tin	ppm	ASTM D5185m >15	<b>0</b>	<1	<1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>2</b>	10	3
Barium	ppm	ASTM D5185m	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	<b>60</b>	52	54
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	<b>922</b>	692	670
Calcium	ppm	ASTM D5185m	<b>1057</b>	1260	1070
Phosphorus	ppm	ASTM D5185m 1360	<b>1032</b>	935	917
Zinc	ppm	ASTM D5185m 1480	<b>1218</b>	1188	1115
Sulfur	ppm	ASTM D5185m	<b>3171</b>	2939	2937

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>10</b>	9	8
Sodium	ppm	ASTM D5185m	<b>3</b>	6	8
Potassium	ppm	ASTM D5185m >20	<b>1</b>	5	6

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >4	<b>0.1</b>	0.3	0.2
Nitration	Abs/cm	*ASTM D7624 >20	<b>5.8</b>	8.9	7.7
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>17.6</b>	18.9	17.5

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>13.7</b>	15.1	14.1
Base Number (BN)	mg KOH/g	ASTM D2896 12.2	<b>8.6</b>	6.8	7.1







# OIL ANALYSIS REPORT

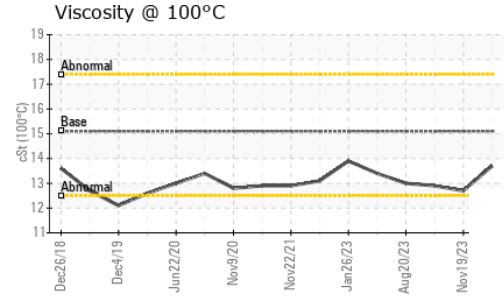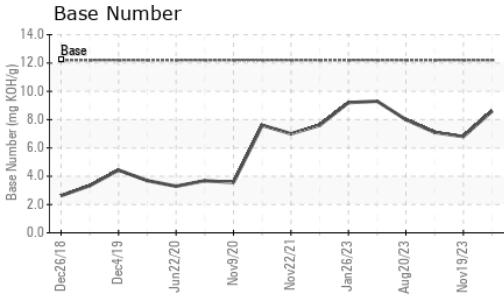

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.1	<b>13.7</b>	12.7	12.9

## GRAPHS

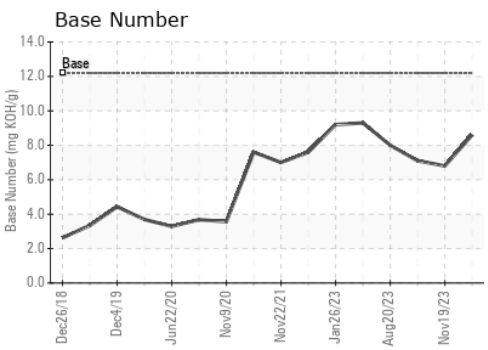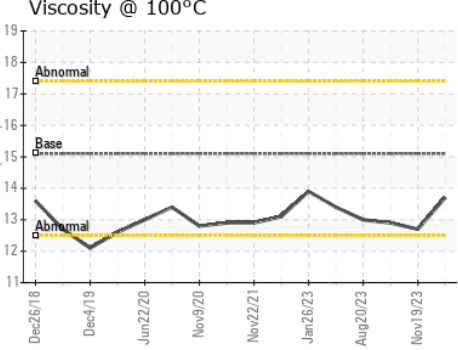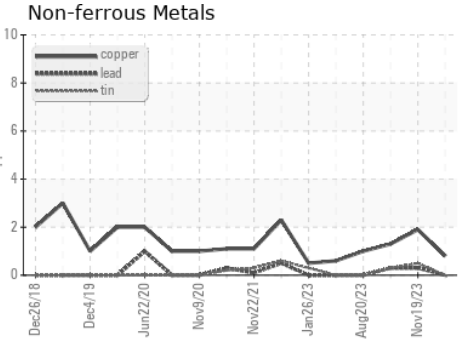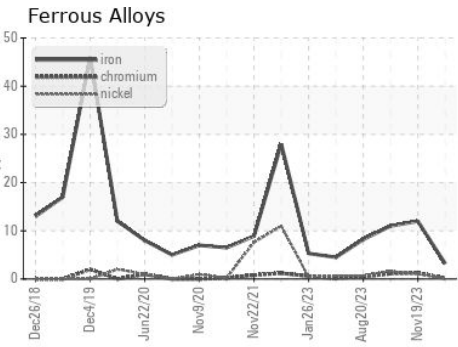

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0086413 **Received** : 20 Dec 2023  
**Lab Number** : **06041229** **Diagnosed** : 22 Dec 2023  
**Unique Number** : 10796458 **Diagnostician** : Don Baldrige  
**Test Package** : FLEET

**GFL Environmental - 816 - WCA of South Arkansas**  
 3083 Smackover Hwy  
 El Dorado, AR  
 US 71730  
 Contact: Mike Howell  
 mike.howell@gflenv.com  
 T:  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)