

OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



BYSTRONIC 40 TON

Component **Hydraulic System** Fluid

NOT GIVEN (--- LTR)

DIAGNOSIS

Recommendation

Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


				Dec2023		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PCA0087776		
Sample Date		Client Info		19 Dec 2023		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				NORMAL		
CONTAMINATI	ION	method	limit/base	current	history1	history2
Water		WC Method	>0.05	NEG		
WEAR METALS	S	method	limit/base	current	history1	history2
Iron		ASTM D5185m	>20	0		
Chromium	ppm	ASTM D5185m	>20	0		
Nickel	ppm	ASTM D5185m	>20	0		
Titanium	ppm	ASTM D5185m	<i>></i> ∠0	υ <1		
Silver	ppm	ASTM D5185m		0		
	ppm	ASTM D5185m	. 20	2		
Aluminum	ppm	ASTM D5185m	>20 >20	0		
Lead	ppm			7		
Copper	ppm	ASTM D5185m ASTM D5185m	>20	0		
Tin Vanadium	ppm		>20	0		
	ppm	ASTM D5185m ASTM D5185m		•		
Cadmium	ppm	MSTINI DST8SITI		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0		
Barium	ppm	ASTM D5185m		6		
Molybdenum	ppm	ASTM D5185m		0		
Manganese	ppm	ASTM D5185m		0		
Magnesium	ppm	ASTM D5185m		3		
Calcium	ppm	ASTM D5185m		52		
Phosphorus	ppm	ASTM D5185m		407		
Zinc	ppm	ASTM D5185m		441		
Sulfur	ppm	ASTM D5185m		1164		
CONTAMINAN	TS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	0		
Sodium	ppm	ASTM D5185m		0		
Potassium	ppm	ASTM D5185m	>20	<1		
FLUID CLEANL	INESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	4016		
Particles >6µm		ASTM D7647	>1300	916		
Particles >14μm		ASTM D7647	>160	71		
Particles >21μm		ASTM D7647	>40	24		
Particles >38μm		ASTM D7647	>10	3		
Particles >71μm		ASTM D7647	>3	1		
Oil Cleanliness		ISO 4406 (c)	>19/17/14	19/17/13		
FLUID DEGRAD	DATION	method	limit/base	current	history1	history2
A : I	1/011/	ACTM DODAE		0.21		

Acid Number (AN)

mg KOH/g ASTM D8045



OIL ANALYSIS REPORT

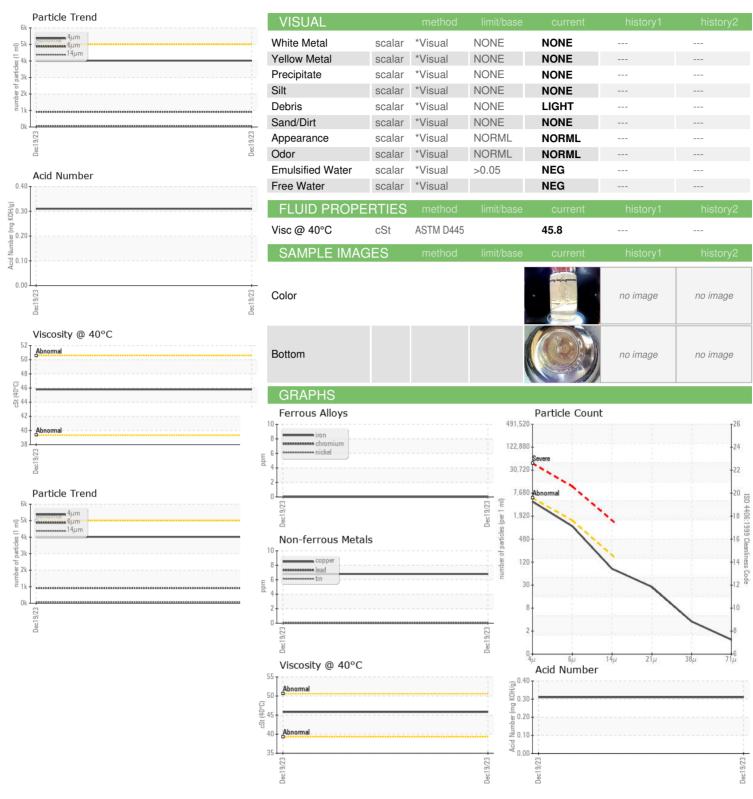



Certificate L2367

Laboratory Sample No. Lab Number Unique Number

: PCA0087776 : 06041409 : 10796638 Test Package : IND 2

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : 20 Dec 2023 Recieved : 21 Dec 2023 Diagnosed

: Wes Davis Diagnostician

195 E LARSEN DR FOND DU LAC, WI US 54937 Contact: Service Manager

MCNEILUS STEEL

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: F: