




PROBLEM SUMMARY

Sample Rating Trend

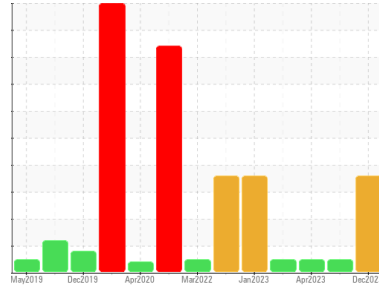

SOOT





Machine Id
225054-632108

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

COMPONENT CONDITION SUMMARY

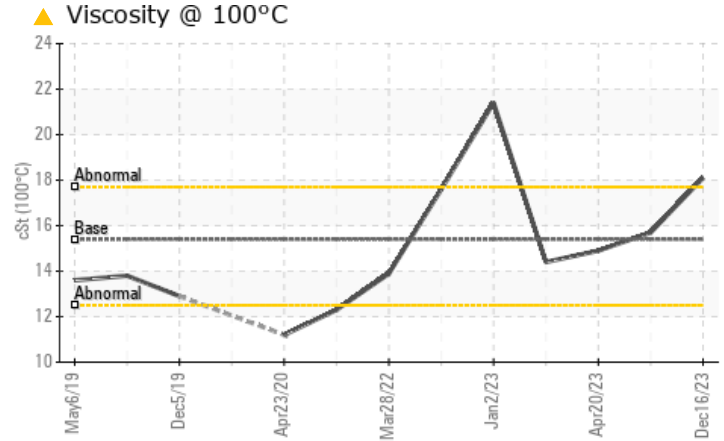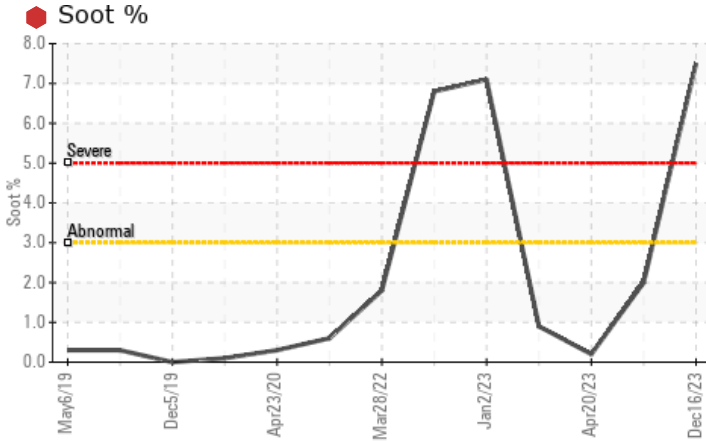

RECOMMENDATION

We advise that you check for faulty combustion, plugged air filters, or aftercoolers. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition. NOTE: High solids (carbon/soot) in the sample have limited the accuracy of Infra-Red data including Total Base Number (TBN) value.

PROBLEMATIC TEST RESULTS

Sample Status				SEVERE	NORMAL	NORMAL
Soot %	%	*ASTM D7844	>3	7.5	2	0.2
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	0.0	9.7	8.0
Visc @ 100°C	cSt	ASTM D445	15.4	18.1	15.7	14.9

Customer Id: GFL865
 Sample No.: GFL0103955
 Lab Number: 06041812
 Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Sean Felton +1 919-379-4092
sfelton@wearcheckusa.com

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Fluid	---	---	?	Oil and filter change at the time of sampling has been noted.
Change Filter	---	---	?	Oil and filter change at the time of sampling has been noted.
Resample	---	---	?	We recommend an early resample to monitor this condition.
Alert	---	---	?	NOTE: High solids (carbon/soot) in the sample have limited the accuracy of Infra-Red data including Total Base Number (TBN) value.
Check Combustion	---	---	?	We advise that you check for faulty combustion, plugged air filters, or aftercoolers.

HISTORICAL DIAGNOSIS

04 Oct 2023 Diag: Wes Davis

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

view report



20 Apr 2023 Diag: Doug Bogart

NORMAL



Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor. All component wear rates are normal. Fuel content negligible. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

view report



23 Mar 2023 Diag: Don Baldrige

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. Fuel content negligible. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.


view report





OIL ANALYSIS REPORT

Sample Rating Trend

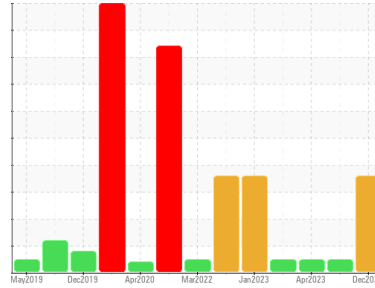

SOOT



Machine Id
225054-632108

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

We advise that you check for faulty combustion, plugged air filters, or aftercoolers. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition. NOTE: High solids (carbon/soot) in the sample have limited the accuracy of Infra-Red data including Total Base Number (TBN) value.

Wear

All component wear rates are normal.

Contamination

There is an abnormal amount of solids and carbon present in the oil.

Fluid Condition

The oil viscosity is higher than normal. The BN level is low. The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0103955	GFL0093284	GFL0074159
Sample Date	Client Info	16 Dec 2023	04 Oct 2023	20 Apr 2023
Machine Age	hrs	20145	19572	18275
Oil Age	hrs	20145	19572	18275
Oil Changed	Client Info	Changed	Changed	Changed
Sample Status		SEVERE	NORMAL	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.2	NEG	NEG	NEG
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	64	20	14
Chromium	ppm ASTM D5185m >20	2	0	0
Nickel	ppm ASTM D5185m >4	<1	0	0
Titanium	ppm ASTM D5185m	0	0	0
Silver	ppm ASTM D5185m >3	0	0	0
Aluminum	ppm ASTM D5185m >20	9	3	5
Lead	ppm ASTM D5185m >40	0	0	0
Copper	ppm ASTM D5185m >330	1	<1	0
Tin	ppm ASTM D5185m >15	1	0	0
Vanadium	ppm ASTM D5185m	<1	0	0
Cadmium	ppm ASTM D5185m	<1	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	2	<1	20
Barium	ppm ASTM D5185m 0	0	0	0
Molybdenum	ppm ASTM D5185m 60	61	60	58
Manganese	ppm ASTM D5185m 0	<1	0	<1
Magnesium	ppm ASTM D5185m 1010	1008	969	837
Calcium	ppm ASTM D5185m 1070	1105	1068	1529
Phosphorus	ppm ASTM D5185m 1150	1086	988	925
Zinc	ppm ASTM D5185m 1270	1327	1225	1173
Sulfur	ppm ASTM D5185m 2060	3239	2955	3147

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	7	3	3
Sodium	ppm ASTM D5185m	2	<1	2
Potassium	ppm ASTM D5185m >20	14	6	3
Fuel	% ASTM D3524 >5	<1.0	<1.0	0.4

INFRA-RED





method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	7.5	2	0.2
Nitration	Abs/cm *ASTM D7624 >20	33.5	7.8	6.7
Sulfation	Abs/.1mm *ASTM D7415 >30	30.4	21.7	17.0

FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	95.8	13.7	15.1
Base Number (BN)	mg KOH/g ASTM D2896 9.8	0.0	9.7	8.0







OIL ANALYSIS REPORT

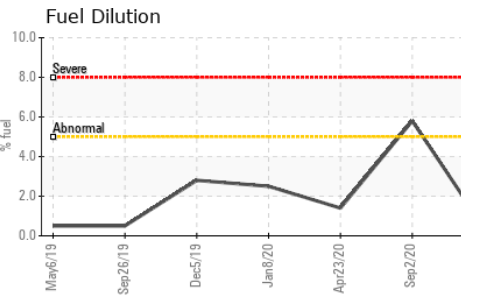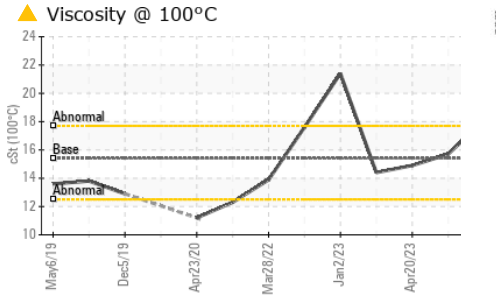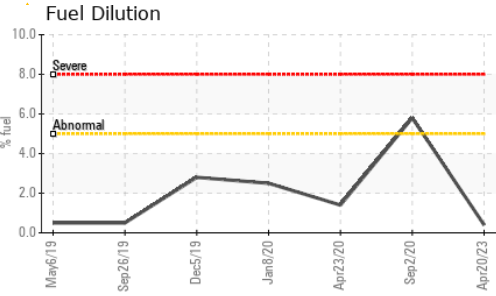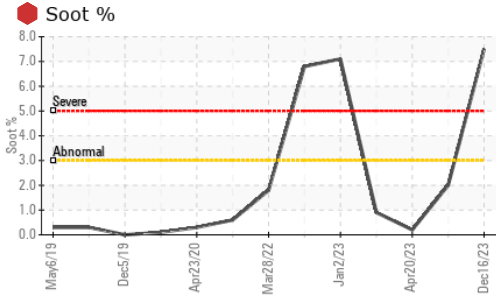

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4 ▲ 18.1	15.7	14.9

GRAPHS

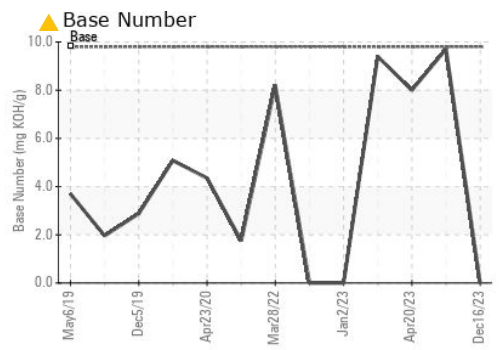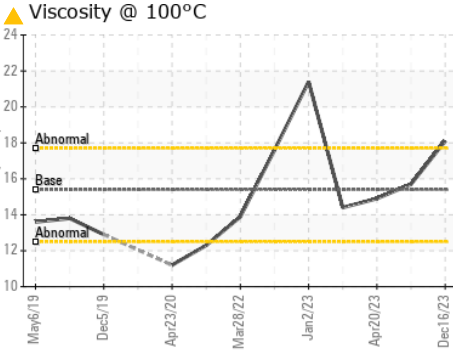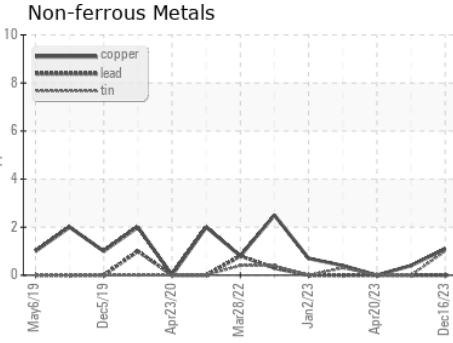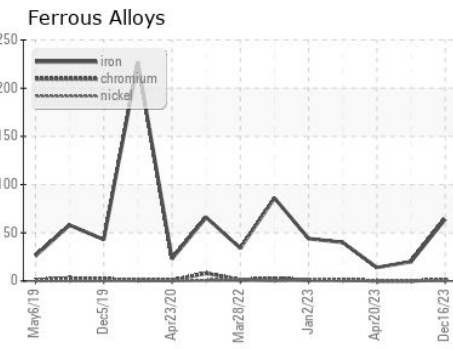

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0103955 **Received** : 21 Dec 2023
Lab Number : 06041812 **Diagnosed** : 26 Dec 2023
Unique Number : 10802420 **Diagnostician** : Sean Felton
Test Package : FLEET (Additional Tests: FuelDilution)

GFL Environmental - 865 - East Mount Hauling
 7213 East Mount Houston Road
 Houston, TX
 US 77050
 Contact: Saul Castillo
 saul.castillo@gflenv.com

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)