




# OIL ANALYSIS REPORT

Sample Rating Trend

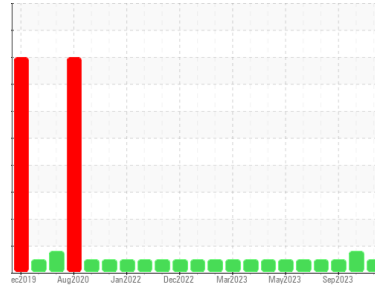

**NORMAL**



Machine Id  
**429059-402467**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0101101</b>	GFL0101120	GFL0087037
Sample Date	Client Info	<b>06 Dec 2023</b>	09 Nov 2023	07 Sep 2023
Machine Age	hrs	Client Info	150	0
Oil Age	hrs	Client Info	600	0
Oil Changed	Client Info	<b>Not Changed</b>	Not Changd	N/A
Sample Status		<b>NORMAL</b>	MARGINAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<b>&lt;1.0</b>	▲ 4.7	<1.0
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >110	<b>45</b>	38	29
Chromium	ppm ASTM D5185m >4	<b>2</b>	2	2
Nickel	ppm ASTM D5185m >2	<b>0</b>	0	0
Titanium	ppm ASTM D5185m	<b>0</b>	<1	<1
Silver	ppm ASTM D5185m >2	<b>0</b>	<1	0
Aluminum	ppm ASTM D5185m >25	<b>10</b>	8	8
Lead	ppm ASTM D5185m >45	<b>21</b>	14	13
Copper	ppm ASTM D5185m >85	<b>3</b>	3	2
Tin	ppm ASTM D5185m >4	<b>2</b>	<1	<1
Vanadium	ppm ASTM D5185m	<b>&lt;1</b>	<1	<1
Cadmium	ppm ASTM D5185m	<b>&lt;1</b>	<1	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>&lt;1</b>	<1	1
Barium	ppm ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm ASTM D5185m 60	<b>63</b>	59	63
Manganese	ppm ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm ASTM D5185m 1010	<b>1007</b>	885	1064
Calcium	ppm ASTM D5185m 1070	<b>1310</b>	1205	1459
Phosphorus	ppm ASTM D5185m 1150	<b>1120</b>	987	1116
Zinc	ppm ASTM D5185m 1270	<b>1375</b>	1210	1429
Sulfur	ppm ASTM D5185m 2060	<b>2935</b>	2695	3593

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >30	<b>8</b>	8	7
Sodium	ppm ASTM D5185m	<b>7</b>	3	8
Potassium	ppm ASTM D5185m >20	<b>19</b>	17	16

## INFRA-RED



method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>0.8</b>	0.7	0.6
Nitration	Abs/cm *ASTM D7624 >20	<b>13.3</b>	13.2	11.9
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>27.9</b>	26.5	25.2

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>26.7</b>	25.3	22.5
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>4.4</b>	5.0	5.7







# OIL ANALYSIS REPORT

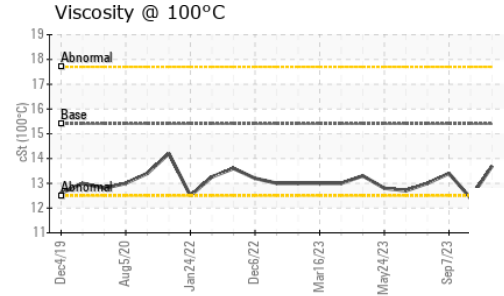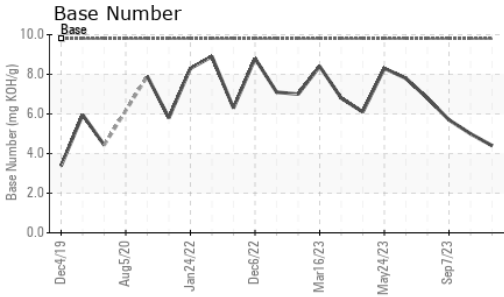

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.7</b>	12.4	13.4

## GRAPHS

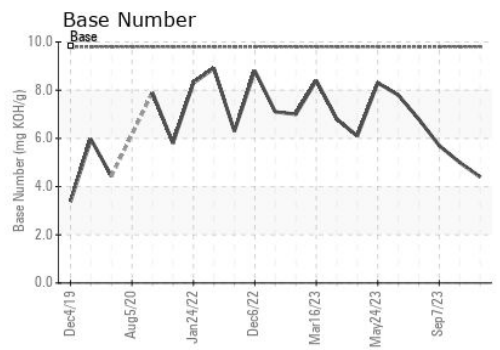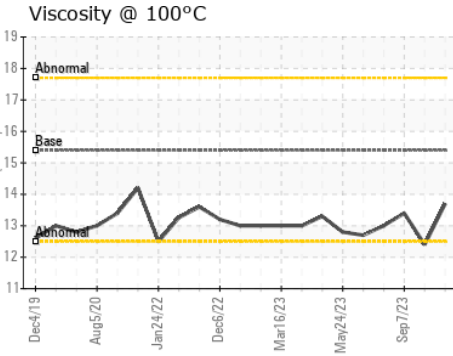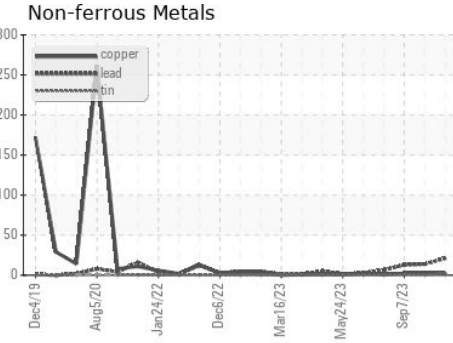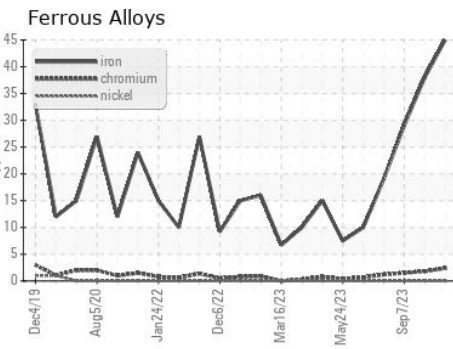

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0101101 **Received** : 21 Dec 2023  
**Lab Number** : **06041814** **Diagnosed** : 22 Dec 2023  
**Unique Number** : 10802422 **Diagnostician** : Don Baldrige  
**Test Package** : FLEET

**GFL Environmental - 846 - Mayfield Hauling**  
 3426 State Route 45  
 Mayfield, KY  
 US 42066  
 Contact: Jack Lindsey  
 jack.lindsey@gflenv.com  
 T: (270)970-3690  
 F:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)