

# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Area  
**Walgreens - Yard Horse**  
 Machine ID  
**[Walgreens - Yard Horse] 136A83004**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON UHP E6 10W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

Fuel content negligible. There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>PCA0105472</b>	---	---
Sample Date	Client Info	<b>12 Dec 2023</b>	---	---
Machine Age	hrs Client Info	<b>1219</b>	---	---
Oil Age	hrs Client Info	<b>0</b>	---	---
Oil Changed	Client Info	<b>Changed</b>	---	---
Sample Status		<b>NORMAL</b>	---	---

## CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.2	<b>NEG</b>	---	---
Glycol	WC Method	<b>NEG</b>	---	---

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	<b>14</b>	---	---
Chromium	ppm ASTM D5185m >20	<b>&lt;1</b>	---	---
Nickel	ppm ASTM D5185m >4	<b>0</b>	---	---
Titanium	ppm ASTM D5185m	<b>0</b>	---	---
Silver	ppm ASTM D5185m >3	<b>0</b>	---	---
Aluminum	ppm ASTM D5185m >20	<b>3</b>	---	---
Lead	ppm ASTM D5185m >40	<b>0</b>	---	---
Copper	ppm ASTM D5185m >330	<b>1</b>	---	---
Tin	ppm ASTM D5185m >15	<b>&lt;1</b>	---	---
Vanadium	ppm ASTM D5185m	<b>&lt;1</b>	---	---
Cadmium	ppm ASTM D5185m	<b>&lt;1</b>	---	---

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>10</b>	---	---
Barium	ppm ASTM D5185m 0	<b>0</b>	---	---
Molybdenum	ppm ASTM D5185m 0	<b>60</b>	---	---
Manganese	ppm ASTM D5185m 0	<b>&lt;1</b>	---	---
Magnesium	ppm ASTM D5185m 80	<b>967</b>	---	---
Calcium	ppm ASTM D5185m 2400	<b>1061</b>	---	---
Phosphorus	ppm ASTM D5185m 750	<b>1121</b>	---	---
Zinc	ppm ASTM D5185m 840	<b>1298</b>	---	---
Sulfur	ppm ASTM D5185m 2130	<b>3322</b>	---	---

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>5</b>	---	---
Sodium	ppm ASTM D5185m	<b>1</b>	---	---
Potassium	ppm ASTM D5185m >20	<b>&lt;1</b>	---	---
Fuel	% ASTM D3524 >5	<b>0.2</b>	---	---




## INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>0.4</b>	---	---
Nitration	Abs/cm *ASTM D7624 >20	<b>6.7</b>	---	---
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>18.1</b>	---	---

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>13.8</b>	---	---
Base Number (BN)	mg KOH/g ASTM D2896 9.5	<b>8.3</b>	---	---





# OIL ANALYSIS REPORT

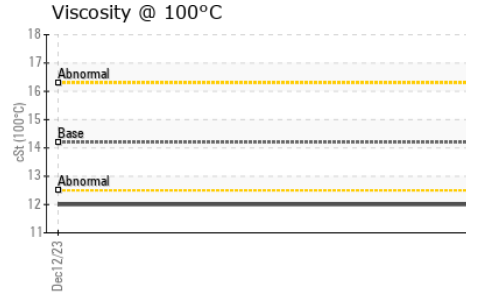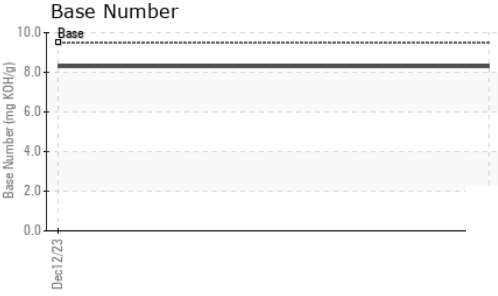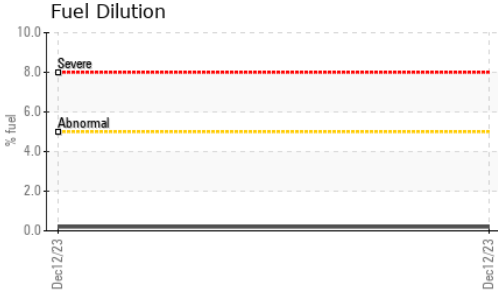

VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	---	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	---	---
Free Water	scalar	*Visual		<b>NEG</b>	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.2	<b>12.0</b>	---	---

## GRAPHS

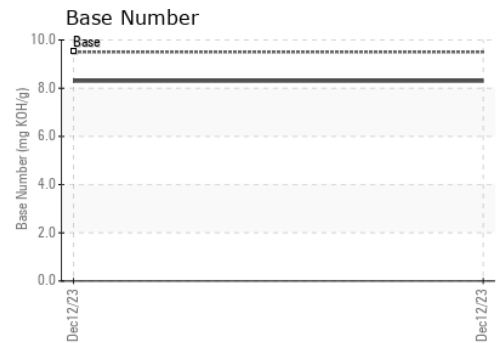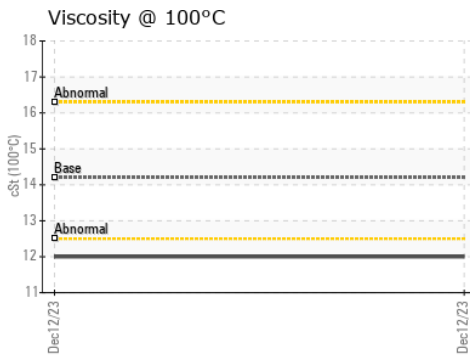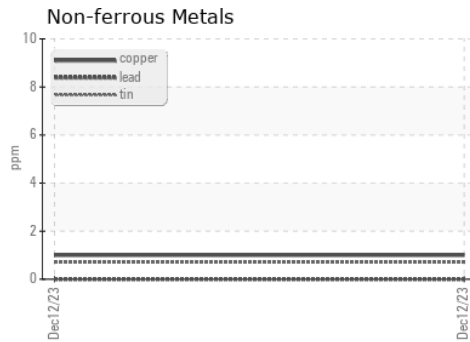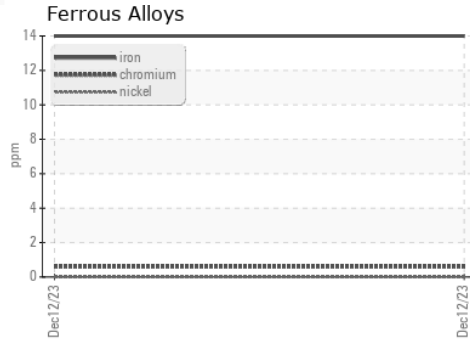

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0105472 **Recieved** : 21 Dec 2023  
**Lab Number** : **06041843** **Diagnosed** : 26 Dec 2023  
**Unique Number** : 10802451 **Diagnostician** : Wes Davis  
**Test Package** : FLEET ( Additional Tests: FuelDilution, PercentFuel )

**Transervice - Shop 1366 - Berkeley-Woodland**  
 2370 East Main Street  
 Woodland, CA  
 US 95776  
 Contact: Gary Mann  
 gmanna@transervice.com  
 T: (530)666-7771  
 F: (530)406-7971

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)