

OIL ANALYSIS REPORT

Area Plymouth & Brockton Machime Id 11450

Component Transmission (Auto) Fluid EXTENDED LIFE COOLANT (26 QTS)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear


All component wear rates are normal.

Contamination

There is no indication of any contamination in the fluid.

Fluid Condition

Confirm oil type. The AN level is acceptable for this fluid. The condition of the fluid is suitable for further service.







NORMAL


SAMPLE INFORI	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PCA0104486		
Sample Date		Client Info		05 Dec 2023		
Machine Age	mls	Client Info		77039		
Oil Age	mls	Client Info		77039		
Oil Changed		Client Info		Changed		
Sample Status				NORMAL		
CONTAMINAT	ION	method	limit/base	current	history1	history2
Water		WC Method	>0.1	NEG		
WEAR METAL	S	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>230	137		
Chromium	ppm	ASTM D5185m	>2	<1		
Nickel	ppm	ASTM D5185m	>5	2		
Titanium	ppm	ASTM D5185m	>2	<1		
Silver	ppm	ASTM D5185m	>5	0		
Aluminum	ppm	ASTM D5185m	>65	33		
Lead	ppm	ASTM D5185m	>55	50		
Copper	ppm	ASTM D5185m	>85	13		
Tin	ppm	ASTM D5185m	>5	5		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		124		
Barium	ppm	ASTM D5185m		0		
Molybdenum	ppm	ASTM D5185m		2		
Manganese	ppm	ASTM D5185m		2		
Magnesium	ppm	ASTM D5185m		<1		
Calcium	ppm	ASTM D5185m		44		
Phosphorus	ppm	ASTM D5185m		353		
Zinc	ppm	ASTM D5185m		0		
Sulfur	ppm	ASTM D5185m		988		
CONTAMINAN	TS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	7		
Sodium	ppm	ASTM D5185m		7		
Potassium	ppm	ASTM D5185m	>20	6		
FLUID DEGRA	DATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.92		



OIL ANALYSIS REPORT





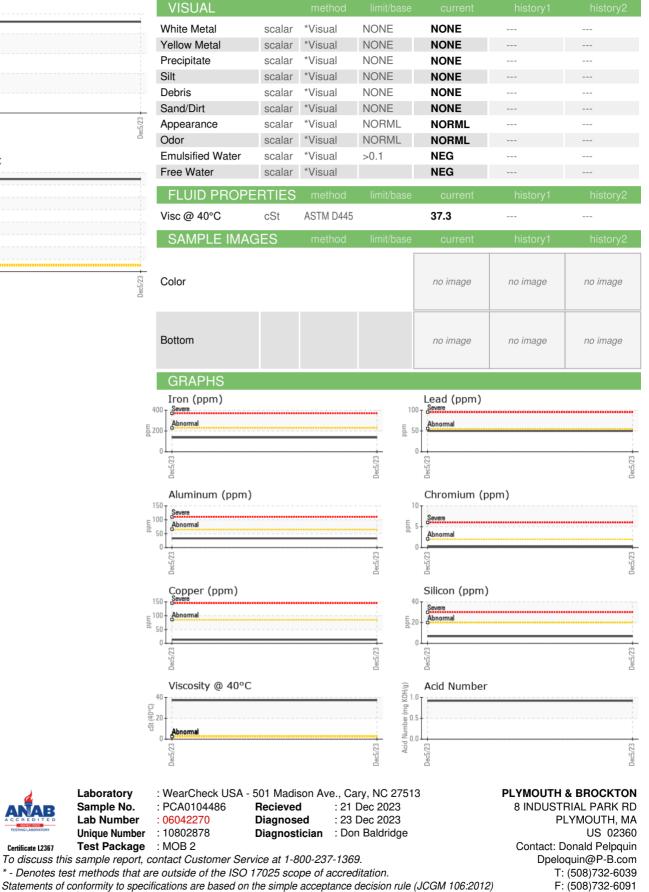

Certificate L2367

Laboratory

Sample No.

Lab Number

Submitted By: Donald Pelpquin

Page 2 of 2