


# OIL ANALYSIS REPORT

## Sample Rating Trend



**NORMAL**

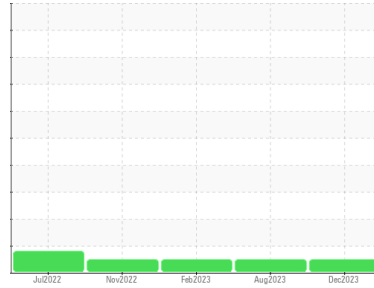

Machine Id  
**624553**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 10W30 (--- QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

### Wear

Metal levels are typical for a new component breaking in.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>PCA0113340</b>	PCA0104320	PCA0092359
Sample Date	Client Info	<b>13 Dec 2023</b>	12 Aug 2023	26 Feb 2023
Machine Age	mls Client Info	<b>31383</b>	24740	16046
Oil Age	mls Client Info	<b>0</b>	0	0
Oil Changed	Client Info	<b>Not Changed</b>	Changed	Not Changed
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	<b>30</b>	70	48
Chromium	ppm ASTM D5185m >20	<b>&lt;1</b>	2	1
Nickel	ppm ASTM D5185m >4	<b>0</b>	1	2
Titanium	ppm ASTM D5185m	<b>0</b>	0	<1
Silver	ppm ASTM D5185m >3	<b>&lt;1</b>	<1	<1
Aluminum	ppm ASTM D5185m >20	<b>4</b>	10	8
Lead	ppm ASTM D5185m >40	<b>0</b>	0	0
Copper	ppm ASTM D5185m >330	<b>64</b>	240	352
Tin	ppm ASTM D5185m >15	<b>2</b>	11	11
Vanadium	ppm ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 2	<b>22</b>	18	22
Barium	ppm ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm ASTM D5185m 50	<b>65</b>	59	61
Manganese	ppm ASTM D5185m 0	<b>&lt;1</b>	2	1
Magnesium	ppm ASTM D5185m 950	<b>868</b>	879	880
Calcium	ppm ASTM D5185m 1050	<b>1219</b>	1200	1201
Phosphorus	ppm ASTM D5185m 995	<b>1055</b>	931	934
Zinc	ppm ASTM D5185m 1180	<b>1254</b>	1184	1143
Sulfur	ppm ASTM D5185m 2600	<b>2882</b>	2837	3067

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>3</b>	4	4
Sodium	ppm ASTM D5185m	<b>&lt;1</b>	2	3
Potassium	ppm ASTM D5185m >20	<b>6</b>	23	22



## INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>0.8</b>	1.4	0.9
Nitration	Abs/cm *ASTM D7624 >20	<b>7.9</b>	10.8	9.3
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>20.4</b>	21.7	20.8

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>15.3</b>	18.1	16.6
Base Number (BN)	mg KOH/g ASTM D2896	<b>8.3</b>	7.0	7.7









# OIL ANALYSIS REPORT

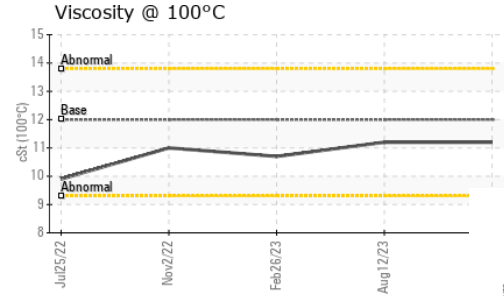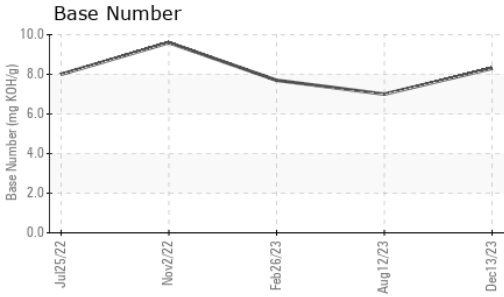

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	11.2	11.2

## GRAPHS

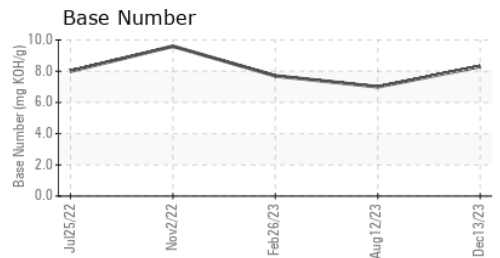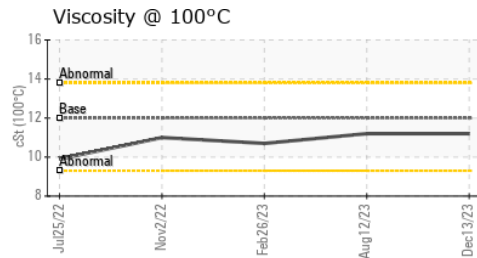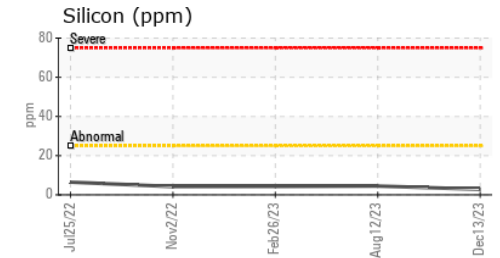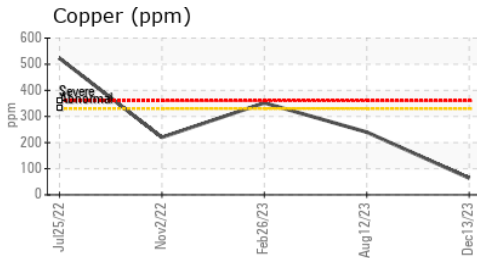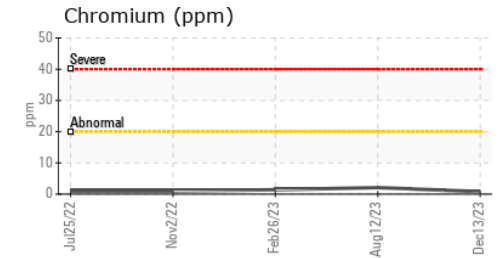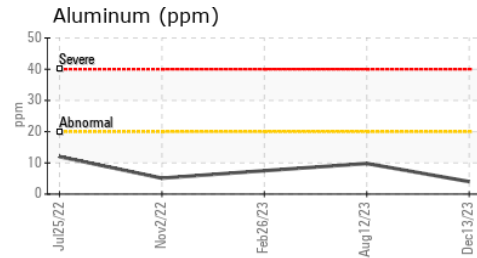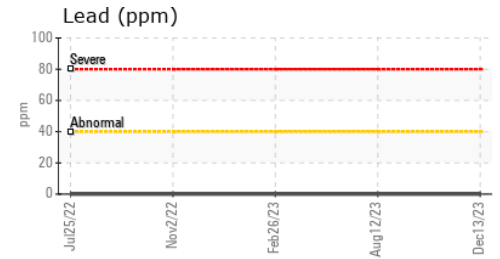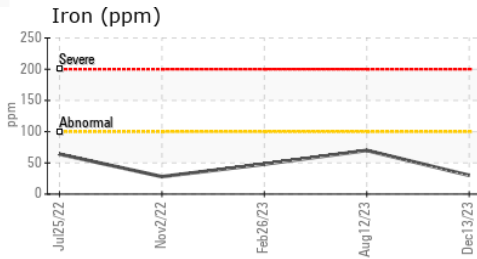

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0113340 **Received** : 21 Dec 2023  
**Lab Number** : 06042560 **Diagnosed** : 22 Dec 2023  
**Unique Number** : 10803168 **Diagnostician** : Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: TBN )

**MILLER TRUCK LEASING #119**  
 39 INDUSTRIAL AVE  
 HASBROUCK HEIGHTS, NJ  
 US 07604  
 Contact: MIKE LONGETTE  
 mlongette@millertransgroup.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (201)528-7053