

OIL ANALYSIS REPORT

Sample Rating Trend





Component Diesel Engine Fluid

PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.


SAMPLE INFORM	MATION	method				history2
Sample Number		Client Info		GFL0085587		
Sample Date		Client Info		15 Dec 2023		
Machine Age	hrs	Client Info		26071		
Oil Age	hrs	Client Info		600		
Oil Changed		Client Info		Changed		
Sample Status				NORMAL		
CONTAMINAT	ION	method	limit/base	current	history1	history2
Fuel		WC Method	>3.0	<1.0		
Water		WC Method	>0.2	NEG		
Glycol		WC Method		NEG		
WEAR METAL	S	method	limit/base	current	history1	history2
Iron Chromium	ppm	ASTM D5185m	>120	8 0		
Nickel	ppm	ASTM D5185m	>20 >5	1		
	ppm	ASTM D5185m		1		
Titanium Silver	ppm	ASTM D5185m	>2	-		
	ppm	ASTM D5185m ASTM D5185m		0 3		
Aluminum Lead	ppm	ASTM D5185m ASTM D5185m	>20 >40	3 0		
	ppm			0		
Copper Tin	ppm	ASTM D5185m ASTM D5185m	>330	0		
Vanadium	ppm	ASTM D5185m	>10	0		
Cadmium	ppm			0		
	ppm	ASTM D5185m		U		
ADDITIVES		method	limit/base	current	history1	history2
Boron	0.00	ASTM D5185m	0	3		
BOIOII	ppm		0			
Barium	ppm	ASTM D5185m	0	0		
Barium	ppm	ASTM D5185m	0	0		
Barium Molybdenum	ppm ppm	ASTM D5185m ASTM D5185m	0 60	0 56		
Barium Molybdenum Manganese	ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m	0 60 0	0 56 0		
Barium Molybdenum Manganese Magnesium	ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	0 60 0 1010	0 56 0 887	 	
Barium Molybdenum Manganese Magnesium Calcium	ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	0 60 0 1010 1070	0 56 0 887 993	 	
Barium Molybdenum Manganese Magnesium Calcium Phosphorus	ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	0 60 0 1010 1070 1150	0 56 0 887 993 1032	 	
Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc	ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	0 60 0 1010 1070 1150 1270	0 56 0 887 993 1032 1244	 	
Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur	ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	0 60 0 1010 1070 1150 1270 2060	0 56 0 887 993 1032 1244 2927	 	
Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN	ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	0 60 0 1010 1070 1150 1270 2060 limit/base	0 56 0 887 993 1032 1244 2927 current	 history1	
Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon	ppm ppm ppm ppm ppm ppm ppm ppm TS	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	0 60 0 1010 1070 1150 1270 2060 limit/base	0 56 0 887 993 1032 1244 2927 current 8	 history1	 history2
Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium	ppm ppm ppm ppm ppm ppm ppm ppm TS	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m method ASTM D5185m ASTM D5185m	0 60 0 1010 1070 1150 1270 2060 limit/base >25	0 56 0 887 993 1032 1244 2927 current 8 3	 history1	 history2
Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium	ppm ppm ppm ppm ppm ppm ppm ppm TS	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	0 60 0 1010 1070 1150 1270 2060 limit/base >25	0 56 0 887 993 1032 1244 2927 <u>current</u> 8 3 2	 history1 	 history2
Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED	ppm ppm ppm ppm ppm ppm ppm ppm TS ppm ppm	ASTM D5185m ASTM D5185m	0 60 0 1010 1070 1150 1270 2060 imit/base >25 >20 imit/base	0 56 0 887 993 1032 1244 2927 current 8 3 2 2	 history1 history1	 history2 history2
Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED Soot %	ppm ppm ppm ppm ppm ppm ppm ppm TS ppm ppm	ASTM D5185m ASTM D5185m	0 60 1010 1070 1150 1270 2060 imit/base >25 20 imit/base	0 56 0 887 993 1032 1244 2927 current 8 3 2 2 current 0.3	 history1 history1	 history2 history2
Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED Soot % Nitration	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m	0 60 1010 1070 1150 1270 2060 imit/base >25 imit/base >20 imit/base	0 56 0 887 993 1032 1244 2927 <u>current</u> 8 3 2 2 <u>current</u> 0.3 8.9	 history1 history1 history1	 history2 history2 history2
Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED Soot % Nitration Sulfation	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m	0 60 1010 1070 1150 1270 2060 imit/base >25 20 imit/base >20 imit/base >20	0 56 0 887 993 1032 1244 2927 current 8 3 2 2 current 0.3 8.9 19.3	 history1 history1 history1	 history2 history2 history2
Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED Soot % Nitration Sulfation FLUID DEGRAD	ppm ppm ppm ppm ppm ppm ppm ppm TS ppm ppm ppm ppm	ASTM D5185m ASTM D7844 *ASTM D7624 *ASTM D7624	0 60 1010 1070 1150 1270 2060 imit/base >25 imit/base >20 imit/base >4 >20 >30	0 56 0 887 993 1032 1244 2927 current 8 3 2 current 0.3 8.9 19.3 current	 history1 history1 history1 history1	 history2 history2 history2 history2




OIL ANALYSIS REPORT

VISUAL





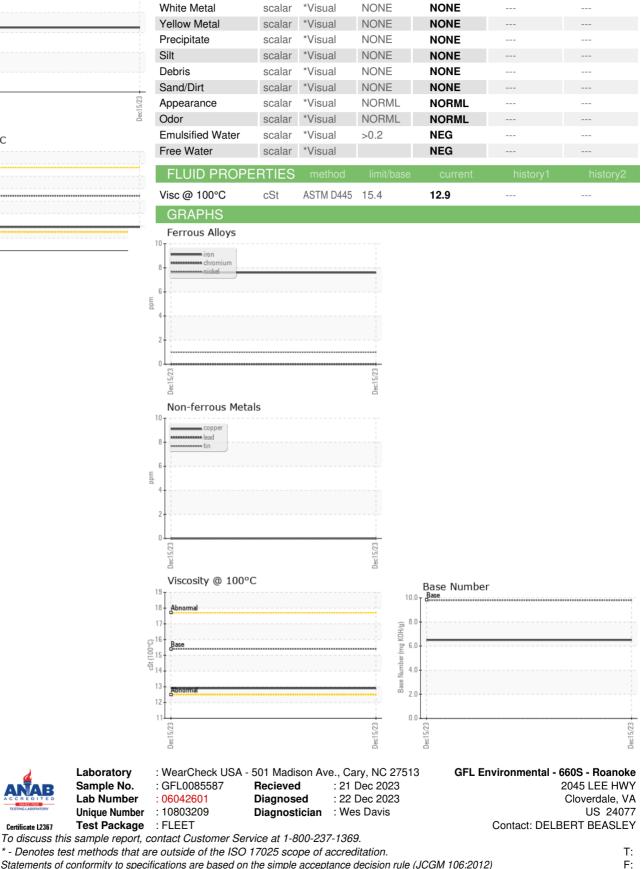

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Certificate L2367

Contact/Location: DELBERT BEASLEY - GFL660R