


# OIL ANALYSIS REPORT

Sample Rating Trend



**NORMAL**

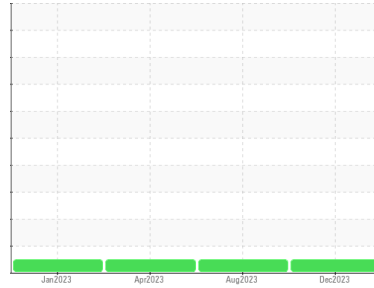

Area  
**(89901X) Walgreens - Tractor**  
Machine Id  
**[Walgreens - Tractor] 136A69048**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 10W30 (11 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0112850</b>	PCA0100210	PCA0094700
Sample Date	Client Info		<b>14 Dec 2023</b>	07 Aug 2023	19 Apr 2023
Machine Age	mls	Client Info	<b>576903</b>	557041	543001
Oil Age	mls	Client Info	<b>33902</b>	14040	33345
Oil Changed	Client Info		<b>Changed</b>	Not Changd	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >80	<b>11</b>	7	14
Chromium	ppm	ASTM D5185m >5	<b>&lt;1</b>	<1	1
Nickel	ppm	ASTM D5185m >2	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m	<b>0</b>	<1	<1
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >30	<b>6</b>	4	9
Lead	ppm	ASTM D5185m >30	<b>0</b>	0	0
Copper	ppm	ASTM D5185m >150	<b>4</b>	3	3
Tin	ppm	ASTM D5185m >5	<b>0</b>	0	<1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 2	<b>&lt;1</b>	0	0
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 50	<b>57</b>	59	64
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 950	<b>967</b>	971	973
Calcium	ppm	ASTM D5185m 1050	<b>1031</b>	1088	1107
Phosphorus	ppm	ASTM D5185m 995	<b>1027</b>	989	1052
Zinc	ppm	ASTM D5185m 1180	<b>1259</b>	1226	1312
Sulfur	ppm	ASTM D5185m 2600	<b>2833</b>	3479	3072

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	<b>4</b>	3	4
Sodium	ppm	ASTM D5185m	<b>2</b>	1	2
Potassium	ppm	ASTM D5185m >20	<b>0</b>	<1	2



## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.6</b>	0.3	0.5
Nitration	Abs/cm	*ASTM D7624 >20	<b>8.9</b>	7.0	8.7
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>21.7</b>	18.5	20.8

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>18.1</b>	14.5	17.4
Base Number (BN)	mg KOH/g	ASTM D2896	<b>6.9</b>	8.5	6.6





# OIL ANALYSIS REPORT

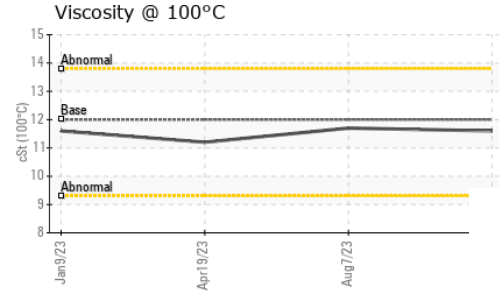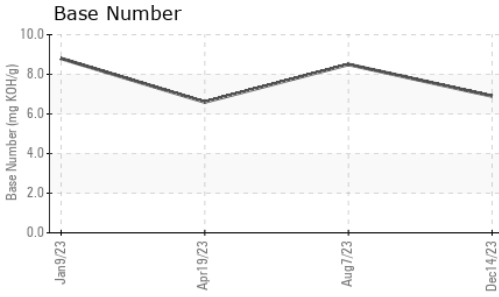

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	12.00	<b>11.6</b>	11.7	11.2

## GRAPHS

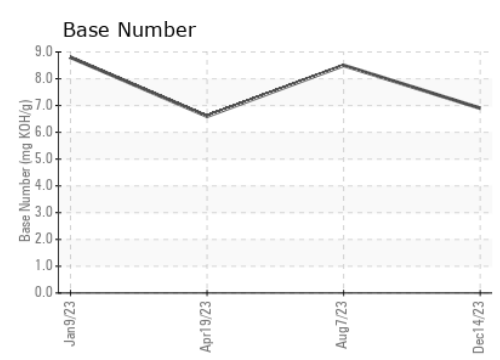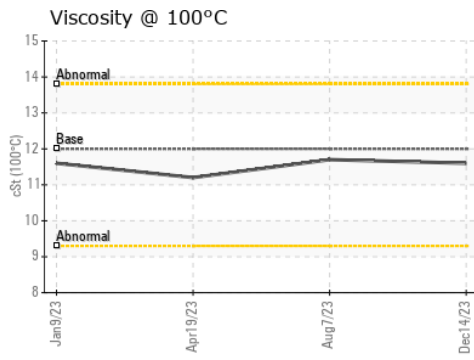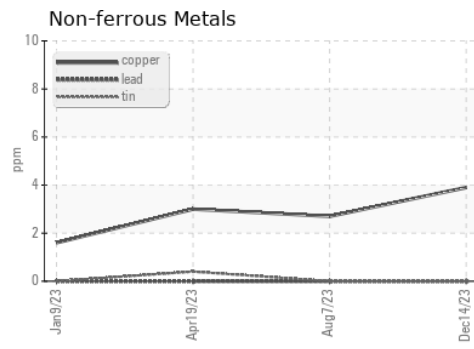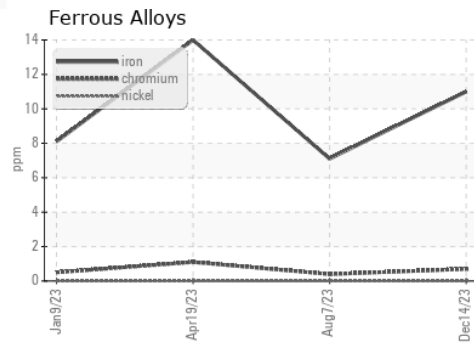

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0112850 **Recieved** : 22 Dec 2023  
**Lab Number** : **06042813** **Diagnosed** : 26 Dec 2023  
**Unique Number** : 10803421 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**Transervice - Shop 1364 - Berkeley-Mt. Vernon**  
 5100 Lake Terrace NE  
 Mt. Vernon, IL  
 US 62864  
 Contact: Erien White  
 ewhite@transervice.com  
 T: (618)244-8726  
 F: (618)244-8791

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)