




# OIL ANALYSIS REPORT

Sample Rating Trend

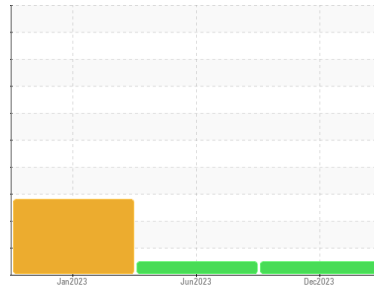

**NORMAL**



Area  
**(50032Z)**  
Machine Id  
**412059**

Component  
**Diesel Engine**  
Fluid

**PETRO CANADA DURON SHP 15W40 (11 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0064700</b>	GFL0072507	GFL0072513
Sample Date	Client Info		<b>06 Dec 2023</b>	08 Jun 2023	17 Jan 2023
Machine Age	hrs	Client Info	<b>3746</b>	2455	1877
Oil Age	hrs	Client Info	<b>609</b>	601	609
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	ABNORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	0.7
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>9</b>	26	85
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	1	3
Nickel	ppm	ASTM D5185m >4	<b>2</b>	4	5
Titanium	ppm	ASTM D5185m	<b>0</b>	<1	<1
Silver	ppm	ASTM D5185m >3	<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185m >20	<b>3</b>	8	▲ 22
Lead	ppm	ASTM D5185m >40	<b>0</b>	<1	<1
Copper	ppm	ASTM D5185m >330	<b>4</b>	29	75
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	2	6
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>20</b>	13	44
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>61</b>	66	98
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	1	5
Magnesium	ppm	ASTM D5185m 1010	<b>848</b>	967	629
Calcium	ppm	ASTM D5185m 1070	<b>1136</b>	1205	1297
Phosphorus	ppm	ASTM D5185m 1150	<b>963</b>	963	641
Zinc	ppm	ASTM D5185m 1270	<b>1154</b>	1214	811
Sulfur	ppm	ASTM D5185m 2060	<b>2719</b>	3061	1896

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>6</b>	15	▲ 68
Sodium	ppm	ASTM D5185m	<b>4</b>	5	3
Potassium	ppm	ASTM D5185m >20	<b>3</b>	20	63

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.4</b>	0.5	0.6
Nitration	Abs/cm	*ASTM D7624 >20	<b>8.3</b>	9.7	11.9
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>20.4</b>	20.8	24.2

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>16.3</b>	17.2	25.2
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>7.5</b>	7.1	5.3







# OIL ANALYSIS REPORT

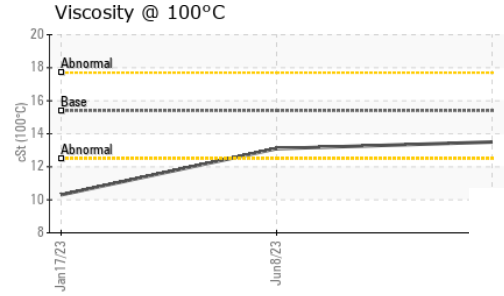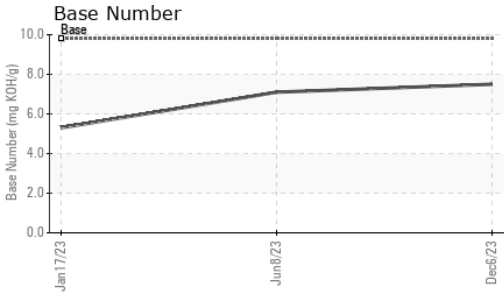

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	13.5	13.1 ▲ 10.3

## GRAPHS

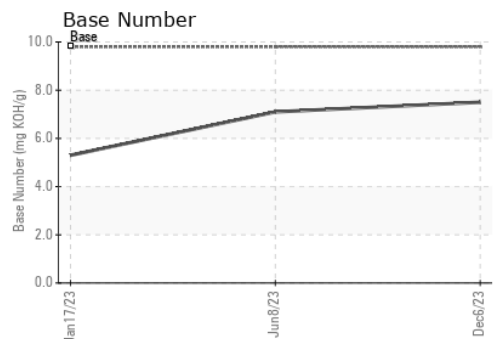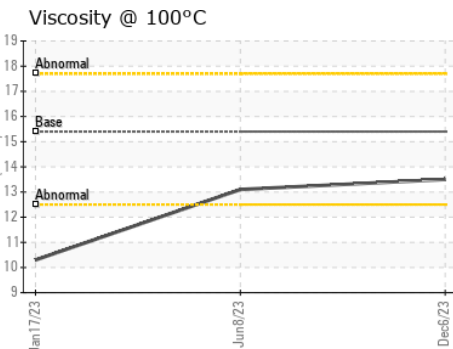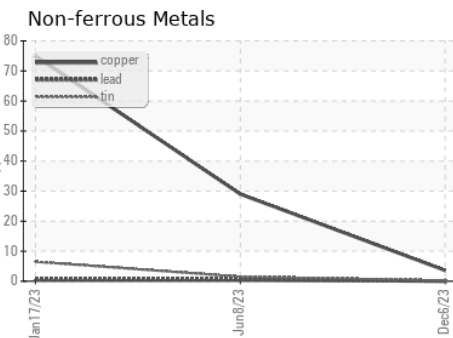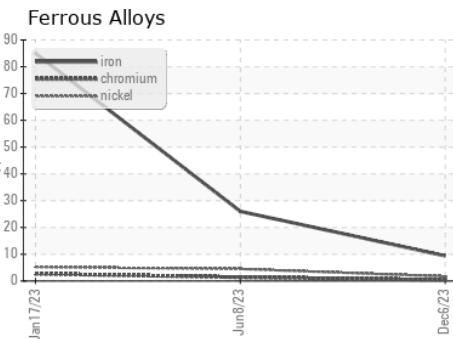

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0064700 **Received** : 22 Dec 2023  
**Lab Number** : 06042839 **Diagnosed** : 26 Dec 2023  
**Unique Number** : 10803447 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 912 - Fort Atkinson HC**  
 1215 Klement St.  
 Fort Atkinson, WI  
 US 53538  
 Contact: LEONARD KOZLEUCHAR  
 leonard.kozleuchar@gflenv.com  
 T: (262)210-6528  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)