

OIL ANALYSIS REPORT

Sample Rating Trend



FUEL



Machine Id
24
Component
Diesel Engine
Fluid
NOT GIVEN (--- QTS)

DIAGNOSIS

▲ Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

▲ Contamination

Light fuel dilution occurring.

▲ Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. Fuel is present in the oil and is lowering the viscosity. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PCA0069378	---	---
Sample Date	Client Info		17 Nov 2023	---	---
Machine Age	mls	Client Info	0	---	---
Oil Age	mls	Client Info	0	---	---
Oil Changed	Client Info		N/A	---	---
Sample Status			ABNORMAL	---	---

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	NEG	---	---
Glycol	WC Method		NEG	---	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	39	---	---
Chromium	ppm	ASTM D5185m >20	1	---	---
Nickel	ppm	ASTM D5185m >4	0	---	---
Titanium	ppm	ASTM D5185m	0	---	---
Silver	ppm	ASTM D5185m >3	0	---	---
Aluminum	ppm	ASTM D5185m >20	11	---	---
Lead	ppm	ASTM D5185m >40	0	---	---
Copper	ppm	ASTM D5185m >330	15	---	---
Tin	ppm	ASTM D5185m >15	0	---	---
Vanadium	ppm	ASTM D5185m	<1	---	---
Cadmium	ppm	ASTM D5185m	0	---	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	33	---	---
Barium	ppm	ASTM D5185m	4	---	---
Molybdenum	ppm	ASTM D5185m	46	---	---
Manganese	ppm	ASTM D5185m	5	---	---
Magnesium	ppm	ASTM D5185m	799	---	---
Calcium	ppm	ASTM D5185m	1106	---	---
Phosphorus	ppm	ASTM D5185m	734	---	---
Zinc	ppm	ASTM D5185m	895	---	---
Sulfur	ppm	ASTM D5185m	2303	---	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	17	---	---
Sodium	ppm	ASTM D5185m	6	---	---
Potassium	ppm	ASTM D5185m >20	29	---	---
Fuel	%	ASTM D3524 >5	▲ 2.3	---	---




INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.3	---	---
Nitration	Abs/cm	*ASTM D7624 >20	10.5	---	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	22.0	---	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	22.4	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	6.9	---	---





OIL ANALYSIS REPORT

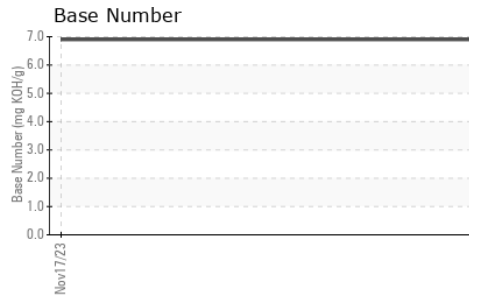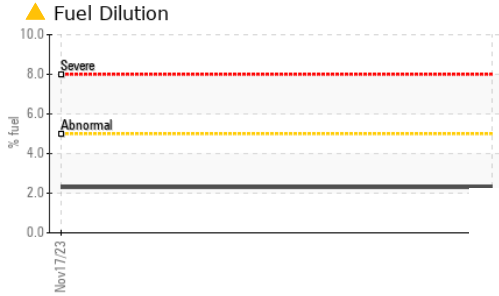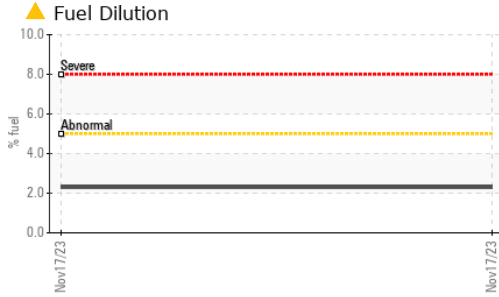

VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Precipitate	scalar	*Visual	NONE	NONE	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---
Free Water	scalar	*Visual		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	▲ 11.4	---	---

GRAPHS

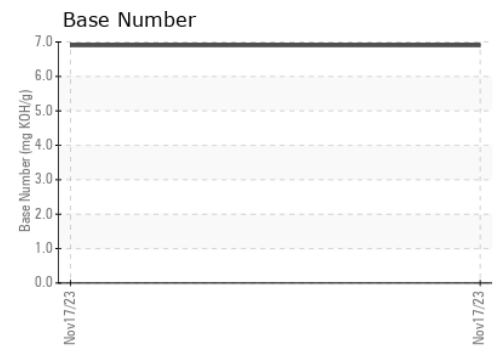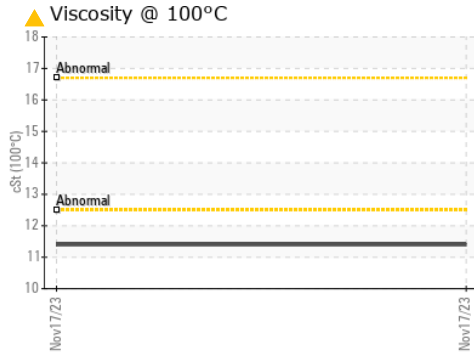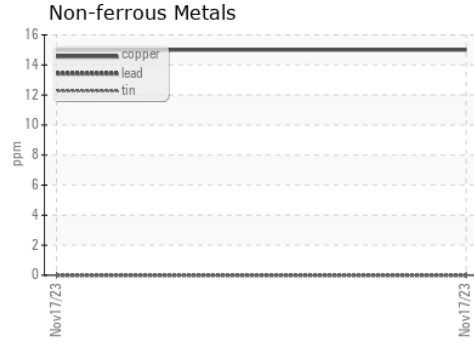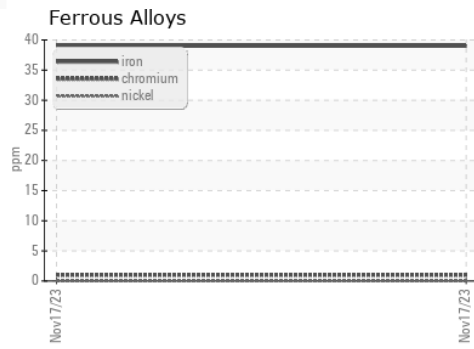

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0069378 **Received** : 22 Dec 2023
Lab Number : 06042890 **Diagnosed** : 27 Dec 2023
Unique Number : 10803498 **Diagnostician** : Wes Davis
Test Package : FLEET (Additional Tests: FuelDilution, PercentFuel)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

BENJAMIN BUS INC
 32611 NORTHFIELD BLVD
 NORTHFIELD, MN
 US 55057
 Contact: KEVIN DANIELS
 kdaniels@benjaminbus.com
 T: (507)990-3714
 F: