


# OIL ANALYSIS REPORT

## Sample Rating Trend

**NORMAL**



Area  
**G.LOPES CONSTRUCTION INC./On-Road**  
 Machine Id  
**311**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

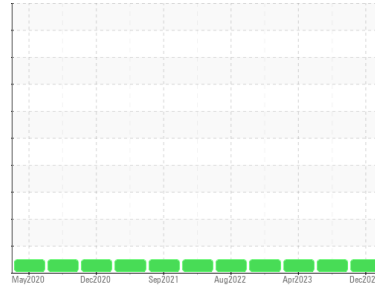

### DIAGNOSIS

**Recommendation**  
 Resample at the next service interval to monitor.

**Wear**  
 All component wear rates are normal.

**Contamination**  
 There is no indication of any contamination in the oil.

**Fluid Condition**  
 The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

### SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>PCA0110110</b>	PCA0098391	PCA0083223
Sample Date	Client Info	<b>20 Dec 2023</b>	23 Aug 2023	25 Apr 2023
Machine Age	mls Client Info	<b>386000</b>	308000	308000
Oil Age	mls Client Info	<b>310000</b>	232000	232000
Oil Changed	Client Info	<b>N/A</b>	N/A	N/A
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

### CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

### WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >65	<b>24</b>	17	20
Chromium	ppm ASTM D5185m >5	<b>2</b>	2	2
Nickel	ppm ASTM D5185m >3	<b>&lt;1</b>	1	0
Titanium	ppm ASTM D5185m >5	<b>&lt;1</b>	1	0
Silver	ppm ASTM D5185m >2	<b>0</b>	<1	0
Aluminum	ppm ASTM D5185m >35	<b>11</b>	9	7
Lead	ppm ASTM D5185m >10	<b>0</b>	<1	0
Copper	ppm ASTM D5185m >180	<b>11</b>	13	12
Tin	ppm ASTM D5185m >8	<b>&lt;1</b>	1	1
Vanadium	ppm ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm ASTM D5185m	<b>0</b>	0	0

### ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>11</b>	<1	0
Barium	ppm ASTM D5185m 0	<b>0</b>	2	0
Molybdenum	ppm ASTM D5185m 60	<b>62</b>	66	61
Manganese	ppm ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm ASTM D5185m 1010	<b>873</b>	979	914
Calcium	ppm ASTM D5185m 1070	<b>1059</b>	1209	1074
Phosphorus	ppm ASTM D5185m 1150	<b>985</b>	1058	984
Zinc	ppm ASTM D5185m 1270	<b>1205</b>	1344	1248
Sulfur	ppm ASTM D5185m 2060	<b>2603</b>	3246	2923

### CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >15	<b>4</b>	4	4
Sodium	ppm ASTM D5185m	<b>&lt;1</b>	0	<1
Potassium	ppm ASTM D5185m >20	<b>1</b>	4	3



### INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>0.7</b>	0.8	0.7
Nitration	Abs/cm *ASTM D7624 >20	<b>8.3</b>	9.1	8.3
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>19.9</b>	21.0	18.9

### FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>15.5</b>	16.7	15.9
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>8.44</b>	8.75	8.96









# OIL ANALYSIS REPORT

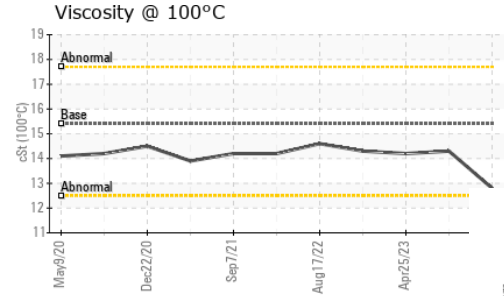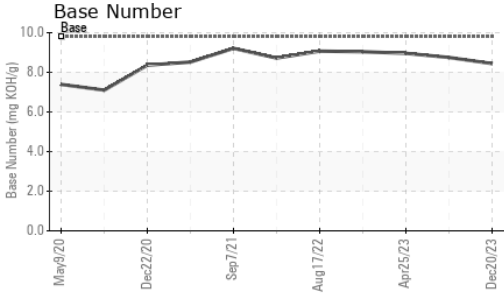

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>12.8</b>	14.3	14.2

## GRAPHS

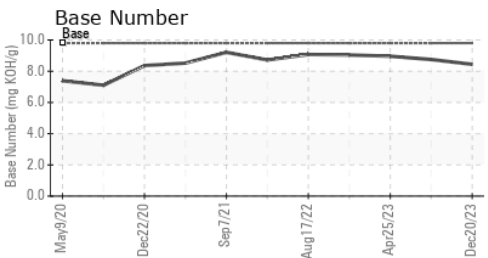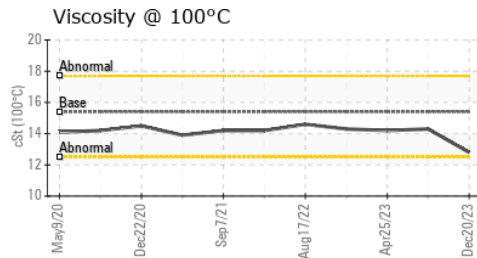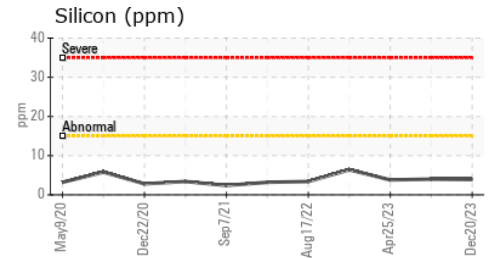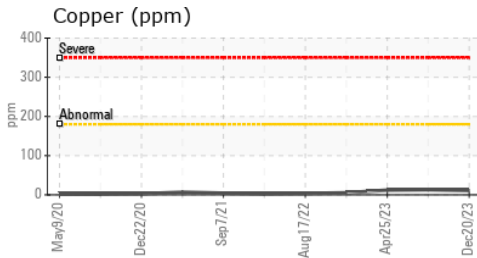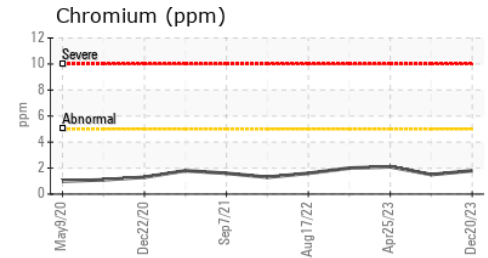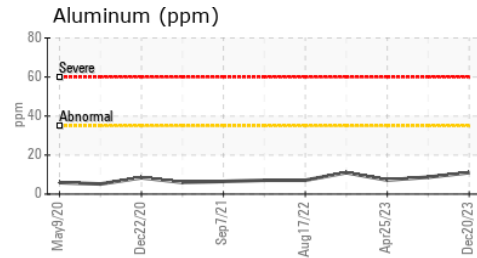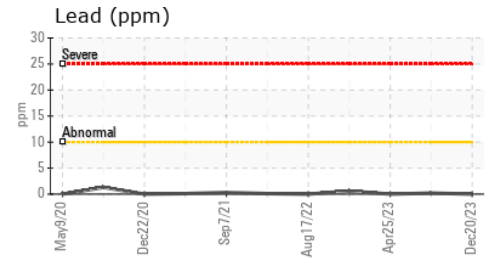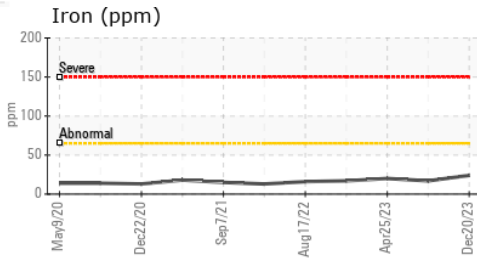

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0110110 **Recieved** : 22 Dec 2023  
**Lab Number** : 06043446 **Diagnosed** : 26 Dec 2023  
**Unique Number** : 10804054 **Diagnostician** : Wes Davis  
**Test Package** : MOB 2

**G LOPES CONSTRUCTION**  
 565 WINTHROP ST  
 TAUNTON, MA  
 US 02780  
 Contact: BUTCH MCGRATH  
 bmcgrath@glopes.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)