


# OIL ANALYSIS REPORT

Sample Rating Trend



**NORMAL**

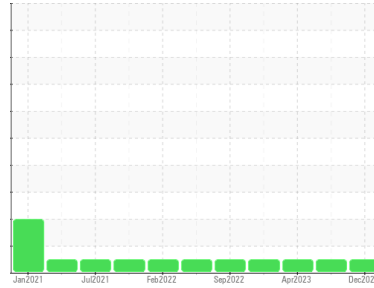

Area  
**G. LOPES CONSTRUCTION INC./On-Road**  
 Machine Id  
**345**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (10 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>PCA0110112</b>	PCA0104703	PCA0083224
Sample Date	Client Info	<b>20 Dec 2023</b>	30 Aug 2023	25 Apr 2023
Machine Age	mls Client Info	<b>232000</b>	212000	192000
Oil Age	mls Client Info	<b>93104</b>	93104	93104
Oil Changed	Client Info	<b>N/A</b>	N/A	N/A
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >200	<b>15</b>	17	20
Chromium	ppm ASTM D5185m >6	<b>&lt;1</b>	1	1
Nickel	ppm ASTM D5185m >3	<b>0</b>	0	0
Titanium	ppm ASTM D5185m >2	<b>&lt;1</b>	1	0
Silver	ppm ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm ASTM D5185m >50	<b>5</b>	4	2
Lead	ppm ASTM D5185m >10	<b>0</b>	<1	0
Copper	ppm ASTM D5185m >50	<b>3</b>	6	7
Tin	ppm ASTM D5185m >6	<b>0</b>	<1	<1
Vanadium	ppm ASTM D5185m	<b>0</b>	<1	0
Cadmium	ppm ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>10</b>	1	0
Barium	ppm ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm ASTM D5185m 60	<b>62</b>	61	62
Manganese	ppm ASTM D5185m 0	<b>0</b>	<1	<1
Magnesium	ppm ASTM D5185m 1010	<b>893</b>	1022	931
Calcium	ppm ASTM D5185m 1070	<b>1050</b>	1169	1088
Phosphorus	ppm ASTM D5185m 1150	<b>1003</b>	1025	1014
Zinc	ppm ASTM D5185m 1270	<b>1215</b>	1323	1257
Sulfur	ppm ASTM D5185m 2060	<b>2731</b>	3394	3097

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >50	<b>5</b>	5	5
Sodium	ppm ASTM D5185m	<b>1</b>	2	1
Potassium	ppm ASTM D5185m >20	<b>4</b>	5	6



## INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>0.6</b>	0.7	0.5
Nitration	Abs/cm *ASTM D7624 >20	<b>9.2</b>	10.0	9.0
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>20.9</b>	22.1	19.5

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>16.8</b>	18.1	16.8
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>8.52</b>	9.42	8.89









# OIL ANALYSIS REPORT

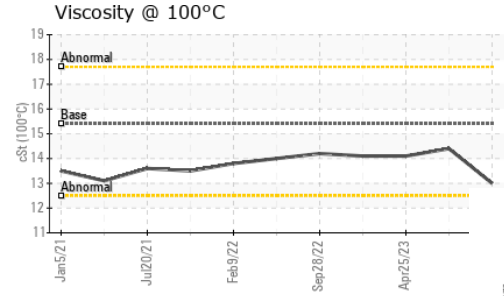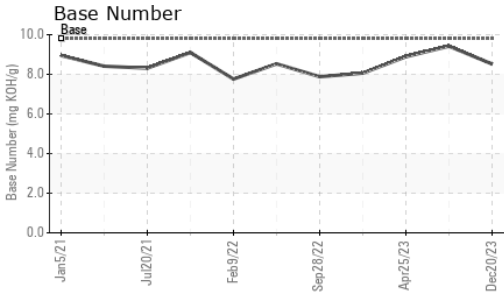

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.0</b>	14.4	14.1

## GRAPHS

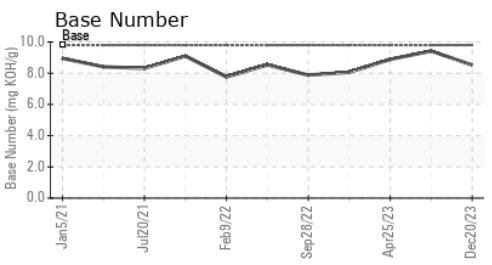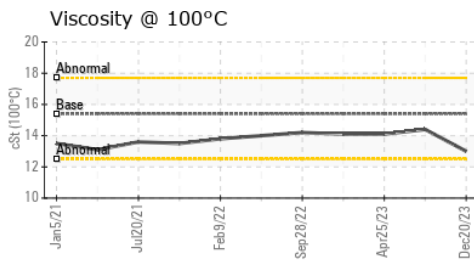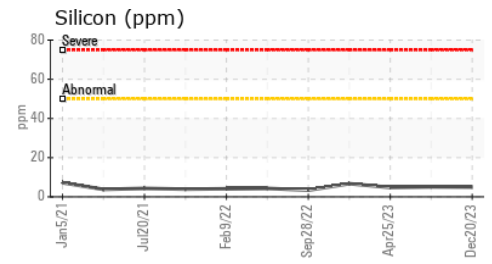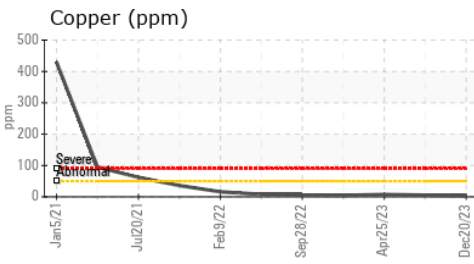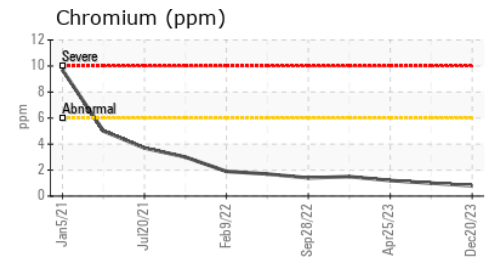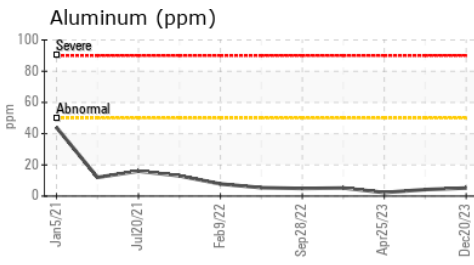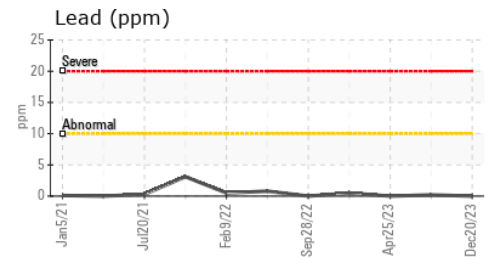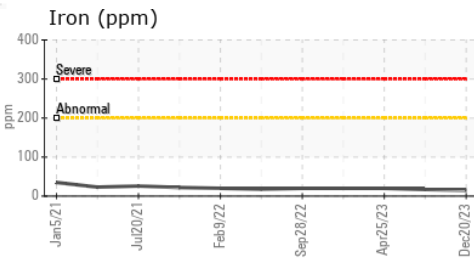

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0110112 **Recieved** : 22 Dec 2023  
**Lab Number** : **06043447** **Diagnosed** : 26 Dec 2023  
**Unique Number** : 10804055 **Diagnostician** : Wes Davis  
**Test Package** : MOB 2

**G LOPES CONSTRUCTION**  
 565 WINTHROP ST  
 TAUNTON, MA  
 US 02780  
 Contact: BUTCH MCGRATH  
 bmcgrath@glopes.com  
 T:  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)