




# OIL ANALYSIS REPORT

Sample Rating Trend

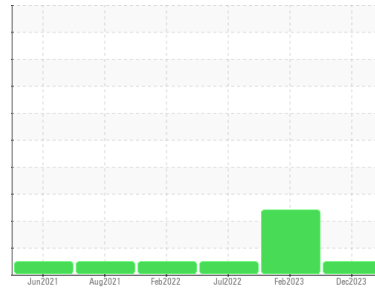

**NORMAL**



Machine Id  
**4636M**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

Fuel content negligible. There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0105867</b>	GFL0073842	GFL0055141
Sample Date	Client Info	<b>20 Dec 2023</b>	21 Feb 2023	01 Jul 2022
Machine Age	hrs	<b>20550</b>	19228	17354
Oil Age	hrs	<b>19228</b>	17354	16158
Oil Changed	Client Info	<b>Not Chngd</b>	Changed	Changed
Sample Status		<b>NORMAL</b>	SEVERE	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >90	<b>0</b>	51	57
Chromium	ppm ASTM D5185m >20	<b>0</b>	2	2
Nickel	ppm ASTM D5185m >2	<b>&lt;1</b>	0	0
Titanium	ppm ASTM D5185m >2	<b>0</b>	0	0
Silver	ppm ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm ASTM D5185m >20	<b>&lt;1</b>	1	3
Lead	ppm ASTM D5185m >40	<b>0</b>	<1	2
Copper	ppm ASTM D5185m >330	<b>&lt;1</b>	<1	1
Tin	ppm ASTM D5185m >15	<b>0</b>	<1	<1
Antimony	ppm ASTM D5185m	<b>---</b>	---	---
Vanadium	ppm ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>4</b>	0	6
Barium	ppm ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm ASTM D5185m 60	<b>60</b>	49	58
Manganese	ppm ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm ASTM D5185m 1010	<b>950</b>	734	914
Calcium	ppm ASTM D5185m 1070	<b>1007</b>	878	1049
Phosphorus	ppm ASTM D5185m 1150	<b>1132</b>	808	964
Zinc	ppm ASTM D5185m 1270	<b>1266</b>	997	1203
Sulfur	ppm ASTM D5185m 2060	<b>3262</b>	2364	3162

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>5</b>	5	6
Sodium	ppm ASTM D5185m	<b>2</b>	5	7
Potassium	ppm ASTM D5185m >20	<b>&lt;1</b>	2	2
Fuel	% ASTM D3524 >3.0	<b>0.3</b>	15.4	<1.0

## INFRA-RED




method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >6	<b>0</b>	1.1	1.5
Nitration	Abs/cm *ASTM D7624 >20	<b>4.2</b>	16.7	14.4
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>17.1</b>	27.6	26.9

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>12.8</b>	33.6	25.6
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>9.1</b>	4.5	7.2







# OIL ANALYSIS REPORT

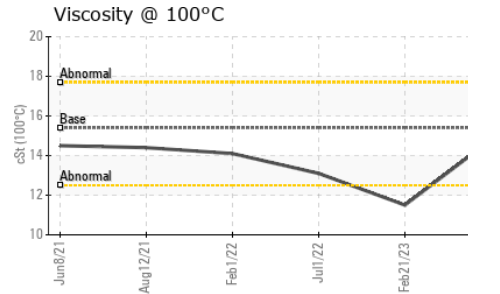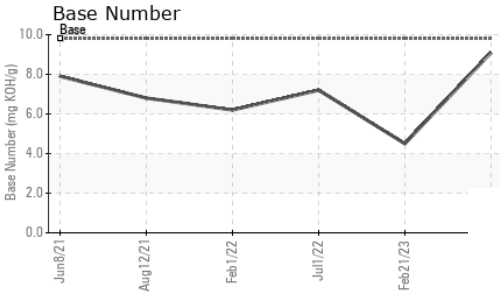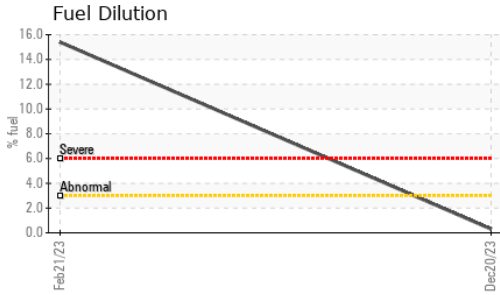

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	14.8	▲ 11.5 13.1

## GRAPHS

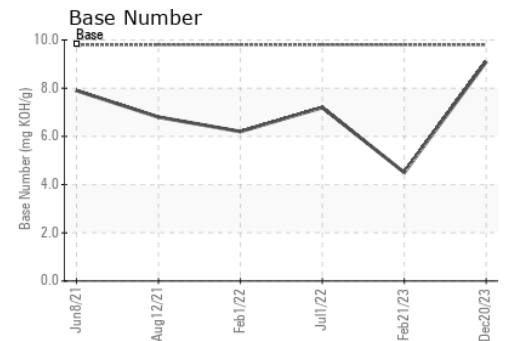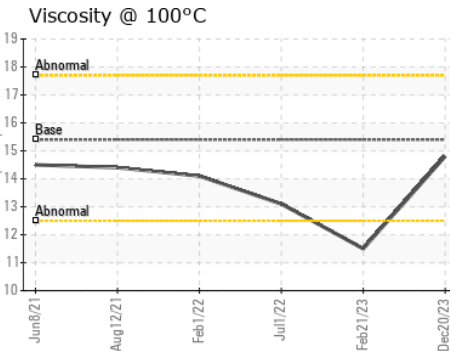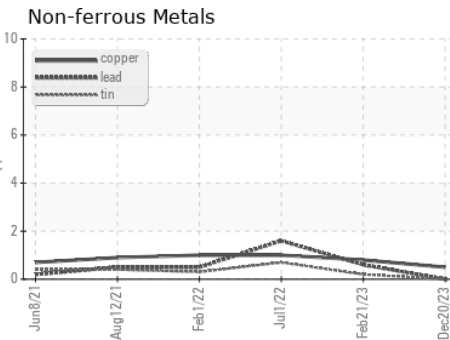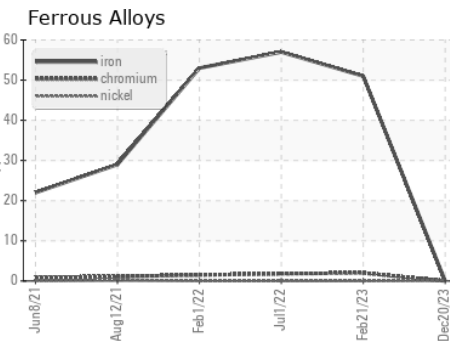

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : GFL0105867      Recieved : 22 Dec 2023  
 Lab Number : 06043838      Diagnosed : 27 Dec 2023  
 Unique Number : 10804446      Diagnostician : Wes Davis  
 Test Package : FLEET ( Additional Tests: PercentFuel )

GFL Environmental - 415 - Michigan East  
 6200 Elmridge  
 Sterling Heights, MI  
 US 48313  
 Contact: Frank Wolak  
 fwolak@gflenv.com  
 T: (586)825-9514  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)