




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

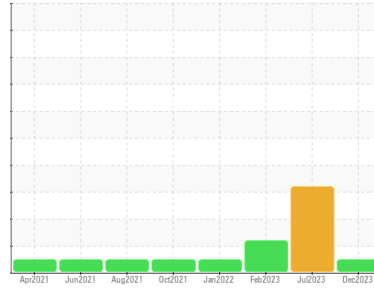

Machine Id  
**4682M**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0105848</b>	GFL0086700	GFL0073859
Sample Date	Client Info	<b>20 Dec 2023</b>	12 Jul 2023	23 Feb 2023
Machine Age	hrs	<b>14300</b>	14095	12999
Oil Age	hrs	<b>14095</b>	12999	9689
Oil Changed	Client Info	<b>Not Chngd</b>	Changed	Changed
Sample Status		<b>NORMAL</b>	ABNORMAL	ABNORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<b>&lt;1.0</b>	▲ 2.9	▲ 5.2
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >80	<b>0</b>	▲ 64	28
Chromium	ppm ASTM D5185m >5	<b>0</b>	5	2
Nickel	ppm ASTM D5185m >2	<b>&lt;1</b>	2	<1
Titanium	ppm ASTM D5185m	<b>0</b>	<1	<1
Silver	ppm ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm ASTM D5185m >30	<b>&lt;1</b>	11	5
Lead	ppm ASTM D5185m >30	<b>0</b>	<1	0
Copper	ppm ASTM D5185m >150	<b>&lt;1</b>	3	1
Tin	ppm ASTM D5185m >5	<b>0</b>	<1	0
Antimony	ppm ASTM D5185m	<b>---</b>	---	---
Vanadium	ppm ASTM D5185m	<b>0</b>	<1	0
Cadmium	ppm ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>4</b>	1	<1
Barium	ppm ASTM D5185m 0	<b>&lt;1</b>	2	0
Molybdenum	ppm ASTM D5185m 60	<b>60</b>	63	59
Manganese	ppm ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm ASTM D5185m 1010	<b>949</b>	886	869
Calcium	ppm ASTM D5185m 1070	<b>1025</b>	1107	1036
Phosphorus	ppm ASTM D5185m 1150	<b>1123</b>	993	957
Zinc	ppm ASTM D5185m 1270	<b>1278</b>	1255	1189
Sulfur	ppm ASTM D5185m 2060	<b>3243</b>	2897	2861

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >20	<b>6</b>	▲ 22	6
Sodium	ppm ASTM D5185m	<b>2</b>	8	6
Potassium	ppm ASTM D5185m >20	<b>&lt;1</b>	4	2

## INFRA-RED



method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>0</b>	1	0.6
Nitration	Abs/cm *ASTM D7624 >20	<b>4.2</b>	12.5	10.5
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>17.2</b>	25.6	20.9

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>12.8</b>	23.3	18.4
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>9.2</b>	5.7	6.7







# OIL ANALYSIS REPORT

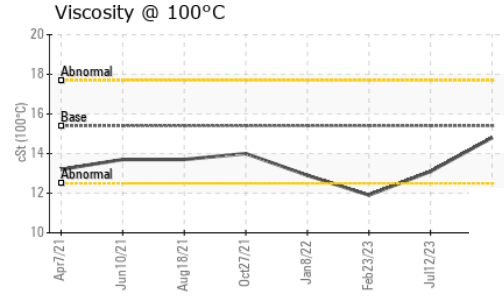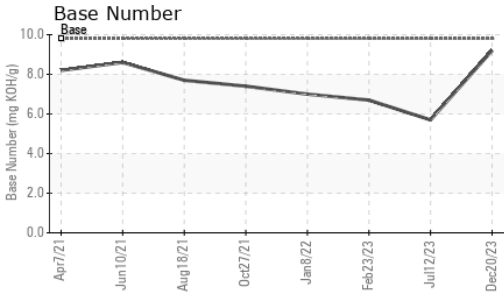

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	<b>14.8</b>	13.1 ▲ 11.9

## GRAPHS

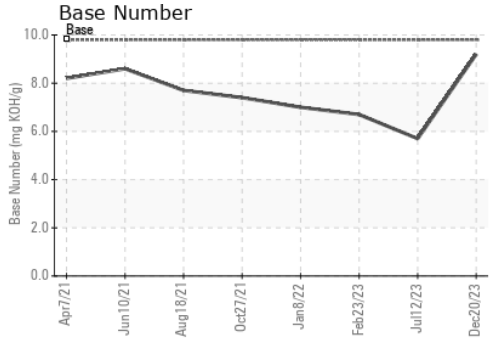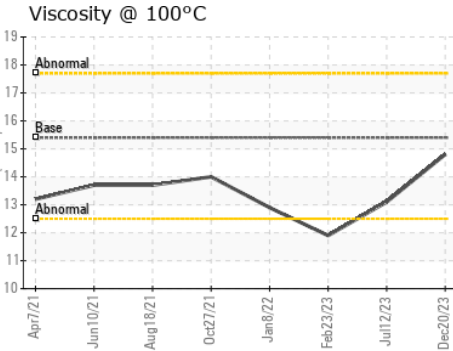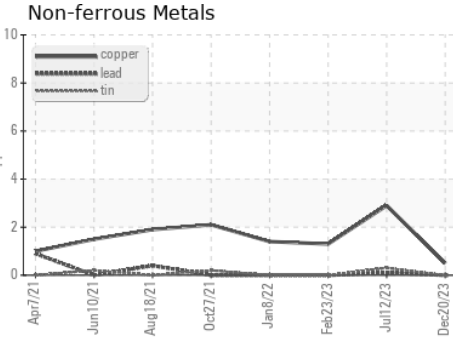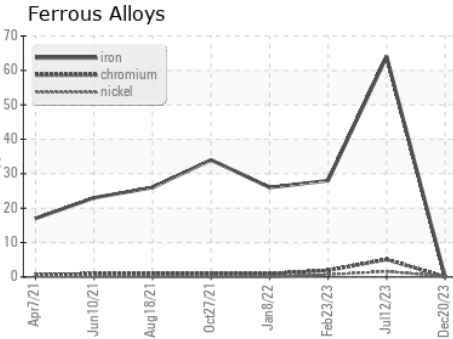

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0105848 **Received** : 22 Dec 2023  
**Lab Number** : **06043861** **Diagnosed** : 27 Dec 2023  
**Unique Number** : 10804469 **Diagnostician** : Jonathan Hester  
**Test Package** : FLEET

**GFL Environmental - 415 - Michigan East**  
 6200 Elmridge  
 Sterling Heights, MI  
 US 48313  
 Contact: Frank Wolak  
 fwolak@gflenv.com  
 T: (586)825-9514  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)