


# OIL ANALYSIS REPORT

Sample Rating Trend



**NORMAL**

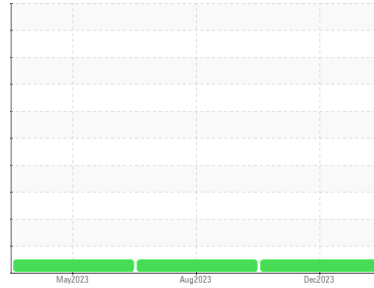

Area  
**(89741X) Walgreens - Tractor**  
Machine Id  
**[Walgreens - Tractor] 136A67179**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 10W30 (11 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0105875</b>	PCA0091539	PCA0091479
Sample Date	Client Info		<b>05 Dec 2023</b>	29 Aug 2023	03 May 2023
Machine Age	mls	Client Info	<b>619539</b>	602846	587851
Oil Age	mls	Client Info	<b>602846</b>	50000	25000
Oil Changed	Client Info		<b>N/A</b>	Changed	Oil Added
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >110	<b>3</b>	14	10
Chromium	ppm	ASTM D5185m >4	<b>0</b>	<1	0
Nickel	ppm	ASTM D5185m >2	<b>0</b>	<1	0
Titanium	ppm	ASTM D5185m	<b>0</b>	0	0
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >25	<b>2</b>	2	5
Lead	ppm	ASTM D5185m >45	<b>0</b>	0	0
Copper	ppm	ASTM D5185m >85	<b>10</b>	52	26
Tin	ppm	ASTM D5185m >4	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 2	<b>2</b>	0	14
Barium	ppm	ASTM D5185m 0	<b>&lt;1</b>	0	0
Molybdenum	ppm	ASTM D5185m 50	<b>62</b>	54	57
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	0
Magnesium	ppm	ASTM D5185m 950	<b>959</b>	816	937
Calcium	ppm	ASTM D5185m 1050	<b>1077</b>	1171	1288
Phosphorus	ppm	ASTM D5185m 995	<b>1119</b>	871	1097
Zinc	ppm	ASTM D5185m 1180	<b>1274</b>	1125	1307
Sulfur	ppm	ASTM D5185m 2600	<b>3097</b>	3050	3724

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >30	<b>4</b>	4	3
Sodium	ppm	ASTM D5185m	<b>3</b>	2	<1
Potassium	ppm	ASTM D5185m >20	<b>2</b>	4	6



## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.3</b>	0.4	0.3
Nitration	Abs/cm	*ASTM D7624 >20	<b>7.0</b>	9.1	8.0
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>18.2</b>	20.5	18.8

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>14.5</b>	17.1	14.8
Base Number (BN)	mg KOH/g	ASTM D2896	<b>9.0</b>	6.5	8.0





# OIL ANALYSIS REPORT

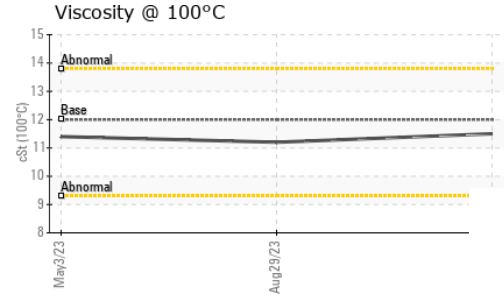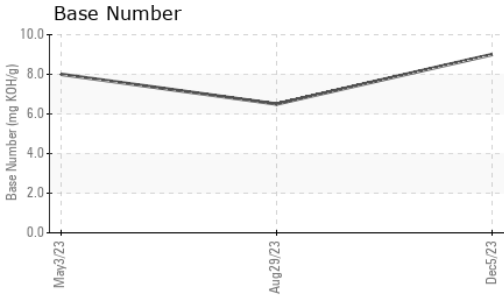

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	12.00	<b>11.5</b>	11.2	11.4

## GRAPHS

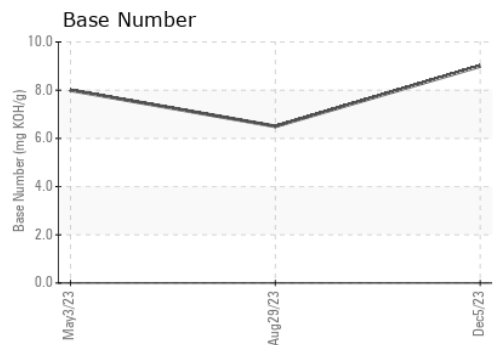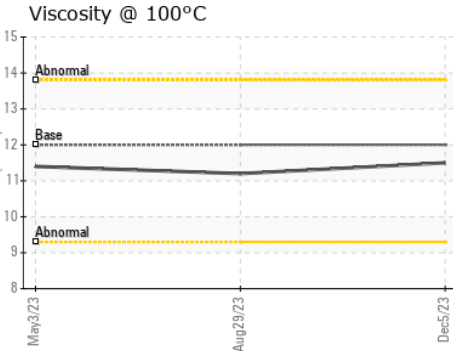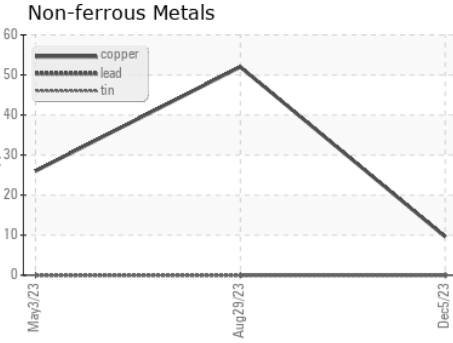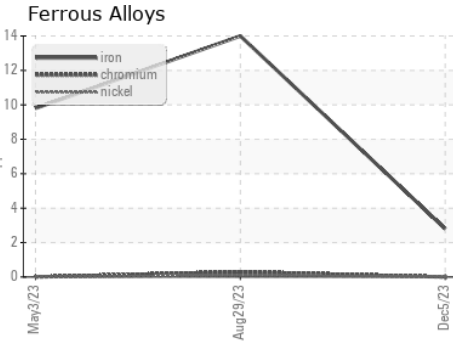

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0105875 **Received** : 22 Dec 2023  
**Lab Number** : **06043921** **Diagnosed** : 26 Dec 2023  
**Unique Number** : 10804529 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**Transervice - Shop 1361 - Berkeley-Windsor**  
 4400 State Road 19  
 Windsor, WI  
 US 53598  
 Contact: Mike Hurda  
 mhurda@transervice.com  
 T: (608)846-2726  
 F: (608)846-0389

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)