



# OIL ANALYSIS REPORT


Sample Rating Trend

**NORMAL**

Area  
**(MC12183) S0916A-Suamico**  
Machine Id  
**821018**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (39 QTS)**

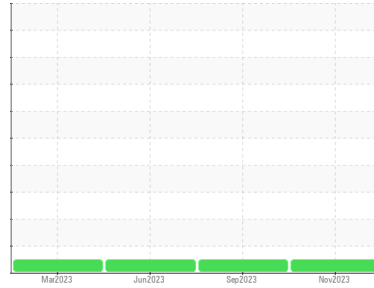

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0095964</b>	GFL0074847	GFL0074820
Sample Date	Client Info		<b>21 Nov 2023</b>	12 Sep 2023	05 Jun 2023
Machine Age	hrs	Client Info	<b>6464</b>	6191	5586
Oil Age	hrs	Client Info	<b>279</b>	605	556
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>8</b>	12	14
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	1	1
Nickel	ppm	ASTM D5185m >4	<b>0</b>	<1	<1
Titanium	ppm	ASTM D5185m	<b>0</b>	<1	0
Silver	ppm	ASTM D5185m >3	<b>0</b>	<1	<1
Aluminum	ppm	ASTM D5185m >20	<b>6</b>	4	6
Lead	ppm	ASTM D5185m >40	<b>0</b>	<1	<1
Copper	ppm	ASTM D5185m >330	<b>0</b>	4	2
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	2	<1
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	<1	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>7</b>	2	7
Barium	ppm	ASTM D5185m 0	<b>0</b>	44	0
Molybdenum	ppm	ASTM D5185m 60	<b>58</b>	57	64
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	1	<1
Magnesium	ppm	ASTM D5185m 1010	<b>926</b>	867	985
Calcium	ppm	ASTM D5185m 1070	<b>1087</b>	1083	1263
Phosphorus	ppm	ASTM D5185m 1150	<b>1097</b>	919	1073
Zinc	ppm	ASTM D5185m 1270	<b>1249</b>	1163	1346
Sulfur	ppm	ASTM D5185m 2060	<b>3107</b>	3039	3801

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>3</b>	4	4
Sodium	ppm	ASTM D5185m	<b>0</b>	2	2
Potassium	ppm	ASTM D5185m >20	<b>3</b>	4	4

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.5</b>	0.8	0.8
Nitration	Abs/cm	*ASTM D7624 >20	<b>6.7</b>	8.2	8.8
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>20.0</b>	20.4	21.6

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>14.6</b>	15.3	16.3
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>8.8</b>	7.3	8.2







# OIL ANALYSIS REPORT

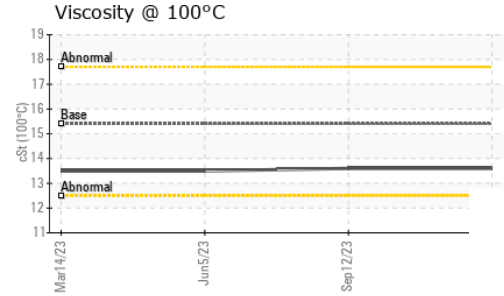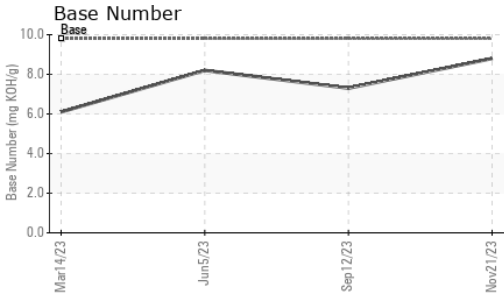

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.6</b>	13.6	13.5

## GRAPHS

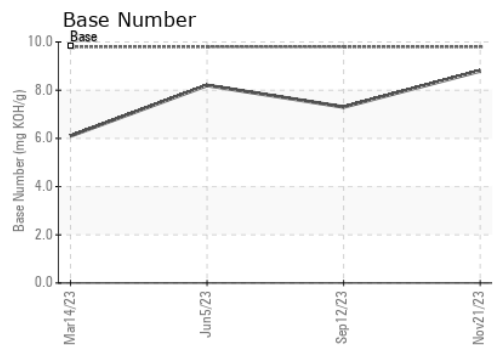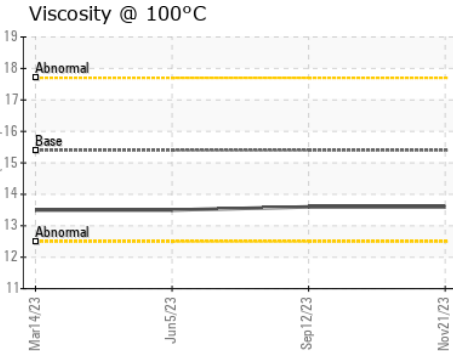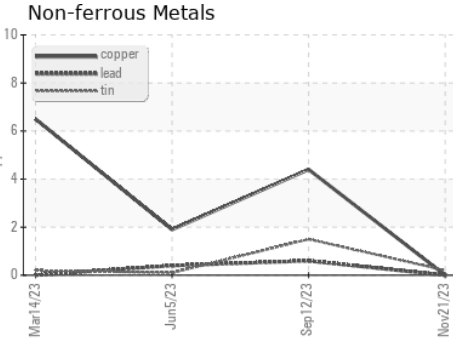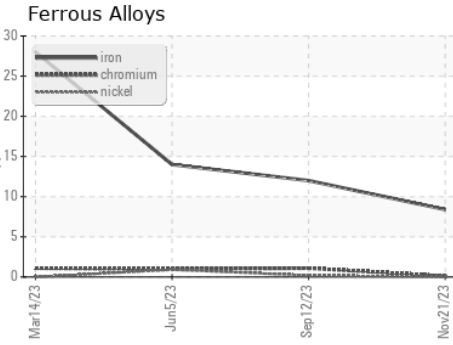

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0095964 **Recieved** : 26 Dec 2023  
**Lab Number** : **06044427** **Diagnosed** : 27 Dec 2023  
**Unique Number** : 10805035 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 916A - Suamico**  
 2300 Deerfield Ave E  
 Suamico, WI  
 US 54313  
 Contact: NICHOLAS WEIDNER  
 nweidner@gflenv.com

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)