




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Area  
**GFL035**  
Machine Id  
**934045**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (42 QTS)**

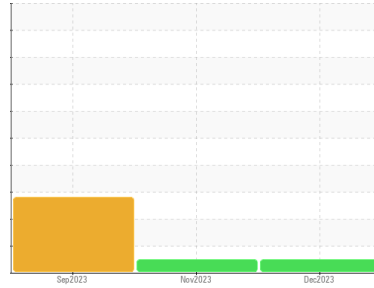

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0102309</b>	GFL0085156	GFL0071607
Sample Date	Client Info		<b>22 Dec 2023</b>	17 Nov 2023	28 Sep 2023
Machine Age	hrs	Client Info	<b>0</b>	0	0
Oil Age	hrs	Client Info	<b>600</b>	300	600
Oil Changed	Client Info		<b>Changed</b>	Not Changd	Changed
Sample Status			<b>NORMAL</b>	NORMAL	ABNORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >120	<b>20</b>	16	44
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m >5	<b>0</b>	<1	<1
Titanium	ppm	ASTM D5185m >2	<b>0</b>	<1	0
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185m >20	<b>5</b>	4	11
Lead	ppm	ASTM D5185m >40	<b>1</b>	<1	2
Copper	ppm	ASTM D5185m >330	<b>4</b>	4	15
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	<1	2
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>4</b>	9	7
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	<1
Molybdenum	ppm	ASTM D5185m 60	<b>42</b>	52	52
Manganese	ppm	ASTM D5185m 0	<b>2</b>	2	12
Magnesium	ppm	ASTM D5185m 1010	<b>523</b>	556	786
Calcium	ppm	ASTM D5185m 1070	<b>1510</b>	1516	1182
Phosphorus	ppm	ASTM D5185m 1150	<b>571</b>	688	686
Zinc	ppm	ASTM D5185m 1270	<b>855</b>	921	931
Sulfur	ppm	ASTM D5185m 2060	<b>2056</b>	2301	2271

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>8</b>	8	▲ 31
Sodium	ppm	ASTM D5185m	<b>7</b>	5	5
Potassium	ppm	ASTM D5185m >20	<b>5</b>	9	27

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >4	<b>0</b>	0	0
Nitration	Abs/cm	*ASTM D7624 >20	<b>12.1</b>	10.8	11.7
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>23.3</b>	20.3	22.1

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>19.9</b>	18.2	20.8
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>3.7</b>	5.5	▲ 3.5







# OIL ANALYSIS REPORT

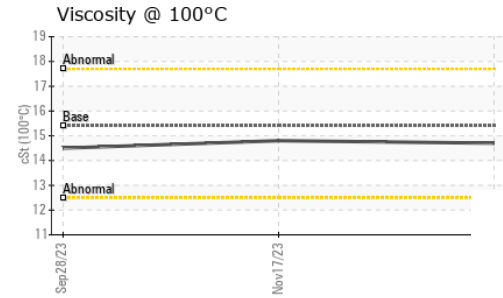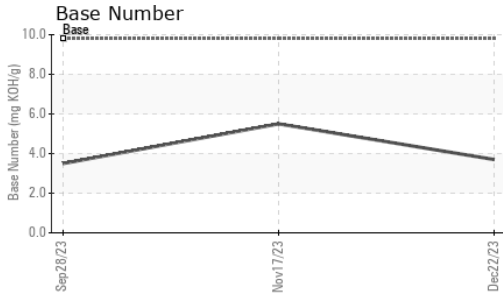

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>14.7</b>	14.8	14.5

## GRAPHS

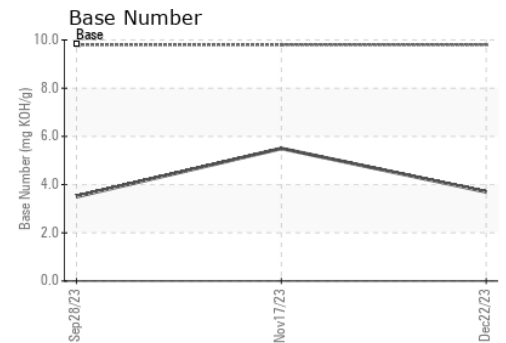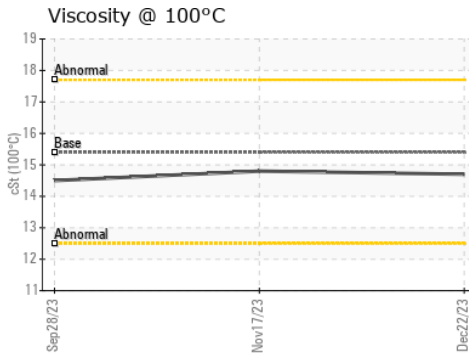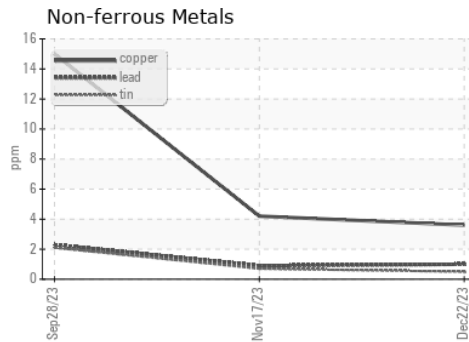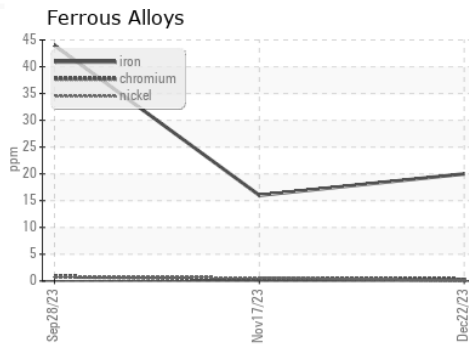

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0102309 **Received** : 26 Dec 2023  
**Lab Number** : **06044582** **Diagnosed** : 27 Dec 2023  
**Unique Number** : 10805190 **Diagnostician** : Sean Felton  
**Test Package** : FLEET

**GFL Environmental - 035 - Greensboro**  
 1236 Elon Place  
 High Point, NC  
 US 27263  
 Contact: JORGE COSTA  
 jorge.costa@gflenv.com  
 T: (336)668-3712  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)